# Spectrum™ 360° Adjustable Flow





An adjustable flow, full circle vortex sprayer with fine water droplets. Flow and coverage can be altered by rotating the cap.

#### **Features**

- Finger-tip flow control with shut-off option.
- Spike model to anchor Spectrum<sup>™</sup> at the plant.
- Barb model for direct attachment to feeder and supply lines.
- Threaded model for installation into Rigid Risers and Asta Stakes.
- 1/2" Threaded model for riser pipe installations.

### **Applications**

Pots, tubs, ground cover, landscaped gardens and nurseries. Waters large garden areas when used with Asta® Stakes and risers.







Spectrum™ Spectrum™ Thread 4 mm Barb 4 mm




Spectrum™ Thread 1/2" FNPT

Performance		360°		
	PRESSURE (kPa)	FLOW (lph)	Diameter (m)	
fully open	100	64	2.8	
(approx.	150	78	3.6	
22 clicks)	200	90	4.0	

#### Flow Rate



## **Diameter of Throw**

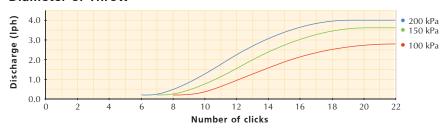

## Spectrum™ 360°

BASE TYPE	ORDER CODE	PACK QUANTITY	PACKS PER CARTON	CARTON (kg)
Barb 4 mm	32045	50	100	11.8
Thread 4 mm	32015	50	100	13.8
Thread 1/2" FNPT	32025	25	65	9.1
Spike	32095	25	40	6.5

## **Specifications**

DIMENSIONS ASSEMBLED		BARB	THREAD	THREAD 1/2"	SPIKE
HEIGHT WIDTH DEPTH WEIGHT (approx)		26 mm 20 mm 16 mm 1.7 g	26 mm 20 mm 16 mm 2.1 g	37 mm 26 mm 26 mm 4.9 g	137 mm 42 mm 16 mm 5.5 g
UV STABILISED MATERIAL	BASE CAP DEFLECTOR	polypropylene polypropylene acetal	acetal polypropylene acetal	polypropylene polypropylene acetal	polypropylene polypropylene acetal
BASE/CONNECT TYPE: Inlet	ION	BARB 4 mm	10-32 UNF THREAD 4 mm	THREAD 1/2" FNPT	BARB 4 mm