


HMS-200 HML-200 Solenoid Dosing Pump



HMS-200 and HML-200 are a single frequency, micro processor controlled solenoid dosing pump with constant flow rate and easy operation.


Specification		
Pressure Bar(pipe)	8	10
Flow rate L/H	5	3
Stroke ml/min	0.52	0.31
Frequency	160	
Connector	1/2"-3/8" Thread, PVC	

Operation instruction	
	Manually adjustable flow rate control dial on the front panel with power-on LED indicator HML series with level control input.
Flow rate adjust range	0-100%

Information		
Outer shell	PP	IP65
Valve head	Pump Head: PVDF	I/O valve: PVDF
	Ball valve: ceramic	Diaphragm: PTFE
Power supply	230V / 50Hz for HMS Series 100-240V, 50-60Hz for HML Series : 12W	
Installation	Wall-mounted / Verticle	
Net weight	2.4Kg	



Measurements

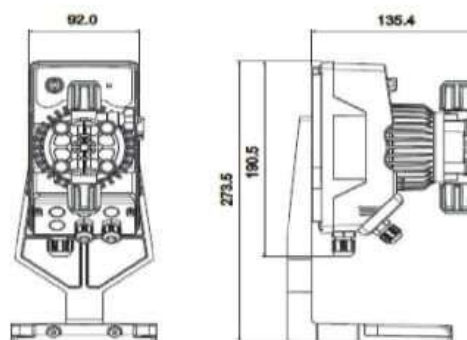

Installation Kit

