

Solenoid Dosing Pump

JCMA

- ★ Includes 4 sub series: JCMA-S, JCMA-H, JCMA-C, JCMA-F
- ★ As the installation dimension for those 4 models are almost the same, no matter which type of pumps the customer intends to choose, the fixed point of the pump can be pre-planned during the project design.
- ★ The JCMA Series solenoid dosing pump offers precise chemical injection at an economical cost. Simple applications, Reliable performance & High efficiency.



JCMA Models

JCMA36

型号 Model	最大流量 Max. Flow	最大压力 Max. Pressure	管径(mm) Pipe Dia. (mm)	材质 Material
JCMA36-2.5/10	2.5 L/H	10bar	内4外9.5 In 4 Out 9.5	PVC/PVDF
JCMA36-1.5/12	1.5 L/H	12bar	内4外9.5 In 4 Out 9.5	PVC/PVDF
JCMA36-0.8/15	0.8 L/H	15bar	内4外9.5 In 4 Out 9.5	PVC/PVDF

JCMA45

Model	Max. Flow	Max. Pressure	Inlet Pipe Dia. (mm)	Outlet Pipe Dia. (mm)	Material
JCMA45-15/1.5	15 L/H	1.5 bar	In 5.5 Out 9.5	In 4 Out 9.5	PVC/PVDF
JCMA45-11/2	11 L/H	2 bar	In 5.5 Out 9.5	In 4 Out 9.5	PVC/PVDF
JCMA45-7.0/3.5	7 L/H	3.5 bar	In 5.5 Out 9.5	In 4 Out 9.5	PVC/PVDF
JCMA45-3.5/7.0	3.5L/H	7 bar	In 5.5 Out 9.5	In 4 Out 9.5	PVC/PVDF

Note: Range of liquid temperature : 0-40°C
 Range of the ambient temperature : 0-40°C
 Max. viscosity : Up to 50mPa · s. If the viscosity exceeds 50mPa · s, please contact us.

Solenoid Dosing Pump

JCMA-S Manual Adjustment



- Manual adjust flow through the key in the control panel
- Pump LED ON/OFF indicator
- Displayable frequency percentage


JCMA Auto-Adjust



3 Control Models:

- ★ JCMA-C Auto-Adjust (digital impulse signal control)
- ★ JCMA-H Auto-Adjust (4-20mA electric current signal control)
- ★ JCMA-F Auto-Adjust (digital impulse signal control & feedback)
- The pump carries working condition display, liquid-level probe and remote ON/OFF connector. Two output modes available.
- Manual flow adjust mode: pump will output according to your manual-chosen frequency.
- Auto flow adjust mode: pump will dosing proportionally by the income signal

Dimensions(mm)

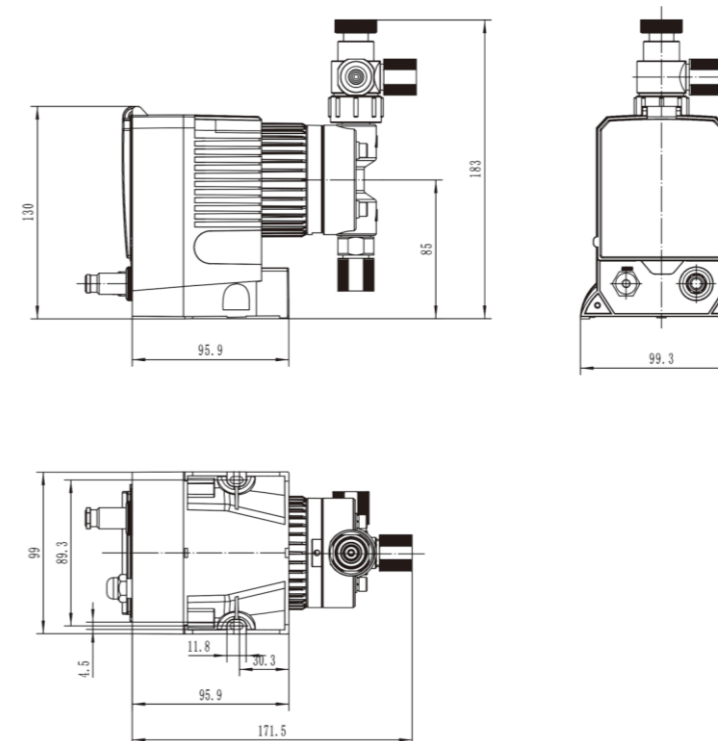

Pump Head

