


● Performance curve


ISO9906 Annex A

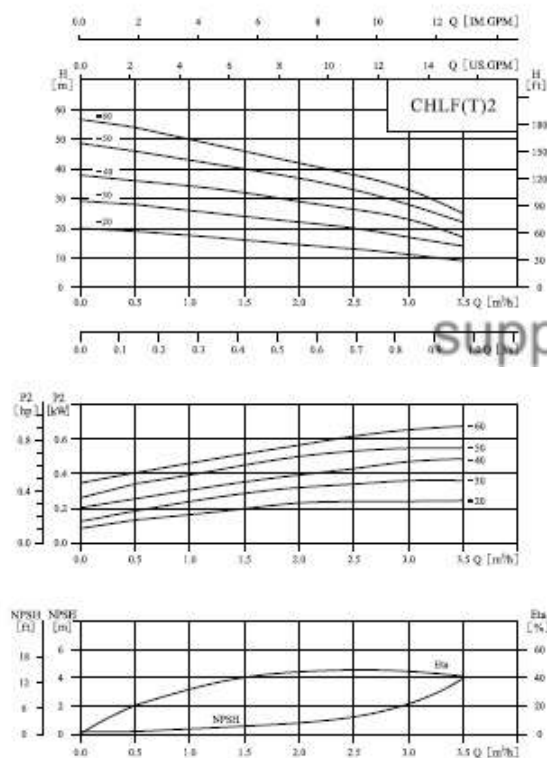

● Performance table

Model	Driving motor (kW) (hp)	Q (m³/h)	0.5	1.0	1.5	2.0	2.5	3.0	3.5
CHLF(T)2-20	0.37 0.5	H (m)	19	18	16	14	13	11	9
CHLF(T)2-30	0.55 0.75		28	27	24	21	20	17	14
CHLF(T)2-40	0.55 0.75		36	34	32	28	26	23	17
CHLF(T)2-50	0.55 0.75		46	43	40	35	33	28	22
CHLF(T)2-60	0.75 1		54	50	48	42	38	33	25

● Installation sketch

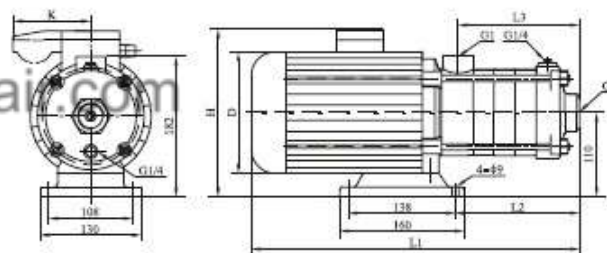

● Size and weight

Motor	Model	Size (mm)						Weight (kg)
		L1	L2	L3	D	H	K	
Three-phase/ single-phase	CHLF(T)2-20	305	87	84	145	215/230	/96	15
	CHLF(T)2-30	325	105	102	145	215/230	/96	15
	CHLF(T)2-40	341	123	120	145	215/230	/96	15
	CHLF(T)2-50	359	141	138	145	215/230	/96	15
	CHLF(T)2-60	422	159	156	170	225/245	/100	17