



KURVA PERFORMA



JPA

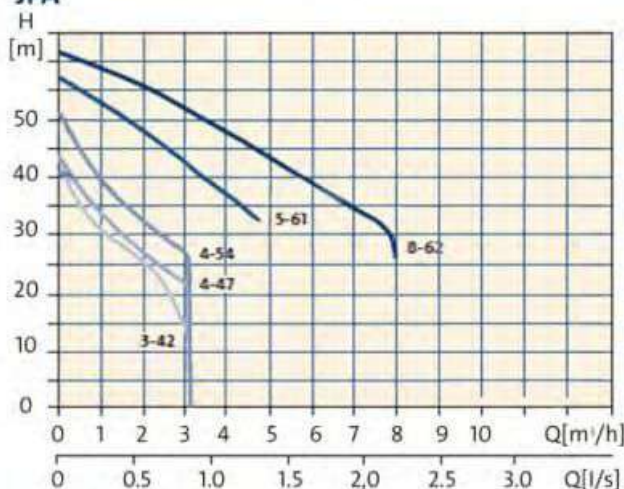

DIMENSI (mm)



Dimensi JPA 4-47, 4-54 PT-V



Dimensi JPA 5-61, 8-62 PT-V



Tipe pompa	Dimensi (mm)			
	A	L	L1	H
JPA 4-47 PT-V	587	395	416	327
JPA 4-54 PT-V	586	411	436	324

Tipe pompa	Dimensi (mm)		
	A	L	H
JPA 5-61 PT-V	264	563	662
JPA 8-62 PT-V	264	637	662

KONDISI OPERASIONAL

Material: Bodi Pompa: Cast iron EN-GIL 200
Impeller: Composite Noryl GFN 2

Sistem tekanan: Max 6 bar (JPA 3-42, 4-47, 4-54)
Max 7,5 bar (JPA 5-61, 8-62)

Jangkauan aliran: Sampai dengan 8 m³/h

Max head: Sampai dengan 62 meter

Daya hisap: Max 8 meter

Suhu cairan: 0°C sampai +35°C

Suhu lingkungan: Max. +40°C

Kelembaban udara relatif: Max. 95%

Tegangan listrik
1x 220-240 V, 50 Hz

Kelas proteksi elektrik
Motor: IP44
Thermal box: IP55

Volume Pressure Tank
18 liter

Tipe pompa	Voltase	P _i [kW]	I _n [A]	Kapasitas Max [m³/h]	Ketinggian Max [meter]	Intlet [inch]	Outlet [inch]
JPA 3-42	1x 220/240	0.72	3.12	3	42	1	1
JPA 4-47	1x 220/240	0.85	3.8	4	47	1	1
JPA 4-54	1x 220/240	1.13	5.1	4	54	1	1
JPA 5-61	1x 220/240	1.60	7.2	5	61	1 1/4	1
JPA 8-62	1x 220/240	2.20	10	8	62	1 1/4	1