



# Line Interactive UPS

## PRO1250SFC/SFCU



Super Fast Charging



True AVR



Wide Input Voltage



Overload Protection



Generator Compatible



Over Temperature Protection




Surge Protection



Early Shutdown Warning System



Universal Socket

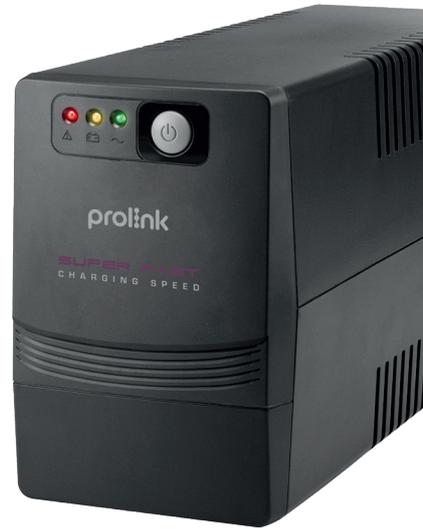

**Prolink PRO1250SFC/SFCU single-phase input/ single-phase output Line-Interactive 1250VA UPS** is a UPS system with Prolink's latest Super-Fast Charging technology. This cutting-edge technology is able to recharge the battery back to 90% of its capacity within 2-4 hours, perfect for areas with intermittent power.

Advance Early Warning system immediately alerts you to an output overload, high temperature or low battery condition, giving you ample time to either correct the condition or shut down your system before battery time runs out.

Intelligent Battery Management system provides additional protection for battery overcharging or deep discharging, while maximizing battery performance, life and reliability through intelligent precision charging. In the event of over temperature and overload, the device will automatically shutdown to prevent any damage from occurring.


**HID compliant** USB interface (for PRO1250SFCU) allows UPS to communicate with built-in power management for Windows/ Linux/ Mac OS through the USB port to execute safe shutdown during power failure even without monitoring software.

Lastly, this device is supported with a wide input voltage range. The unit also comes with universal sockets to provide better compatibility with a wider range of connected devices.

**PRO1250SFC/SFCU** is an ideal solution for safe and stable backup power to home/ small office applications.

## Key Features

- Built-in super fast charger, battery can be recharged to 90% of its capacity within 2-4 hours
- Excellent microprocessor control guarantees high reliability
- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Generator compatible
- Simulated sine wave
- Off-mode charging
- Cold start function
- RJ45 ports (Fax/Modem Protection)
- Optional USB Communication port
- HID Compliant USB (for PRO1250SFCU)

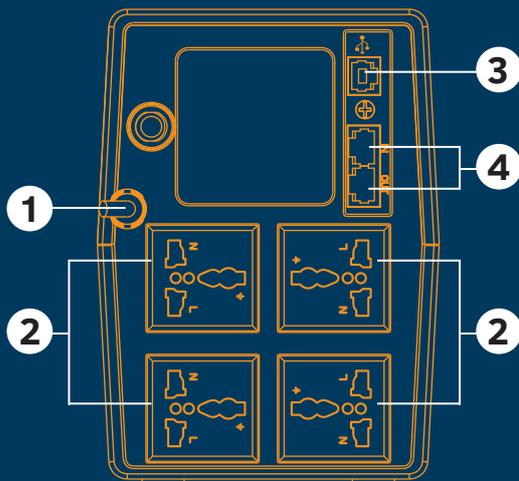

### Legend:

1. Power AC Input
2. Backup Outlets
3. USB Port (Only for PRO1250SFCU)
4. RJ45 Ports

## Specifications

<b>Capacity</b>		1250VA
<b>Input</b>	Voltage Range Frequency Phase	140~300VAC $\pm 5\%$ 50Hz/60Hz (Auto-sensing) Single + GND
<b>Output</b>	Voltage Range Battery Mode Frequency Waveform  Transfer Time	230VAC +12% -14% 230VAC +10% -10% 50Hz/60Hz $\pm 1\%$ (Battery mode) Simulated sine wave (Battery mode) Sine wave (AC mode) 2ms typical
<b>Battery</b>	Type Backup Time Recharge Time	12V/8.2AH - 2pc Up to 40 mins depending on load 2-4 hours recover to 90% capacity
<b>Protection/ Monitoring</b>	Short Circuit Protection Surge Protection Alarm UPS Protection Overload Protection  Intelligent Battery Management	Yes (Line mode & battery mode) Yes Audible & visual Load Auto Sensing and Abnormal Protection Line mode : 110~130% 5 mins change to fault mode >130% fault mode immediately Battery mode : 110~120% alarm & shutdown in 5 secs >120% shutdown immediately  Prevent overcharging of battery Protect battery and prolong battery life
<b>Interface</b>	RJ45 Ports USB Connector*	Modem/Fax Protection AC fault, battery low, shutdown UPS
<b>General</b>	Noise Level Temperature Humidity Power Factor Built-in AVR	<40dB 0 °C - 40 °C 0 - 90% Up to 0.7 TRUE Full AVR (3 steps)
<b>Physical</b>	Dimension (D x W x H) Weight	320 x 130 x 182mm 9.2kg

\*Only applicable for Model 1250SFCU

Authorised Distributor/ Reseller:

Compatible with:



Windows



macOS



Linux