

P 17 Tempra combined unit LV 16 to 63 A

interlocked switched sockets

16-32 A			without rail		with empty Din rail	
• IP 44, IP 55, IP 66 according to IEC 60529 and EN 60529 • IK 08 according to IEC 62262 • Conform to IEC 60439-1 • Supplied without cable glands • Self-extinguishing: 650 °C			125 x 220 mm		125 x 280 mm	
			IP 44	IP 55	IP 44	IP 66
						
			Pack: Cat.Nos	Pack: Cat.Nos	Pack: Cat.Nos	Pack: Cat.Nos
200 to 250 V~ 50/60 Hz	16 A	2P+E	1 566 01	1 566 21	1 566 41	1 566 61
	32 A	2P+E	1 566 09	1 566 29	1 566 49	1 566 69
380 to 415 V~ 50/60 Hz	16 A	3P+E	1 566 05	1 566 25	1 566 45	1 566 65
		3P+N+E	1 566 06	1 566 26	1 566 46	1 566 66
	32 A	3P+E	1 566 13	1 566 33	1 566 53	1 566 73
		3P+N+E	1 566 14	1 566 34	1 566 54	1 566 74
	63 A		without rail		with empty Din rail	
	• IP 66 according to IEC 60529 and EN 60529 • IK 08 according to IEC 62262 • Conform to IEC 60439-1 • Supplied without cable glands • Self-extinguishing: 650 °C		IP 66		IP 66	
						
			Pack: Cat.Nos	Pack: Cat.Nos		
380 to 415 V~ 50/60 Hz	63 A	3P+E	1 572 98	1 589 18		
		3P+N+E	1 589 10	1 572 99		


110 V~ (on request)

P 17 Tempra combined units LV 16 to 63 A

interlocked switched sockets


■ Dimensions

Without rail LV 16/32 A

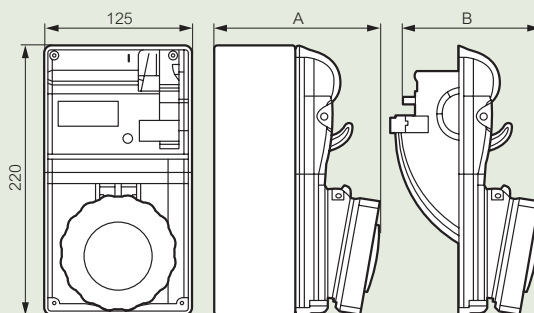

		IP 44	Dimensions (mm)		IP 55	Dimensions (mm)	
		Cat.Nos	A	B	Cat.Nos	A	B
LV 16 A	2P+E	566 01	127	122	566 21	133	128
	3P+E	566 05	129	124	566 25	134	129
	3P+N+E	566 06	130	125	566 26	135	130
LV 32 A	2P+E	566 09	138	133	566 29	143	138
	3P+E	566 13	138	133	566 33	143	138
	3P+N+E	566 14	139	134	566 34	144	139


With empty Din rail LV 16/32 A



		A	
		IP 44	IP 66
LV 16 A		290	300
LV 32 A		295	310

LV 63 A

Cat.Nos 572 98 and 589 10



LV 63 A

Cat.Nos 589 18 and 572 99

