

INDUSTRIAL WEIGHING SOLUTION™

HD SERIES

High Resolution Floor Scale

HD is an advanced floor scale with high resolution and various functions. It is suitable for use in parts production, paint industry and logistics centre. It can be connected to various printers for data collection and offer great mobility with its rechargeable battery.



High-Resolution Weighing (1/15000~1/300000)

Counting & Percent mode Support

Easy operation with 9 function Keys

Rechargeable Battery



Easy operation with 9 function keys



Rechargeable Battery



Scan with your smartphone
to find more products



CAS
www.globalcas.com

HD SERIES

High Resolution Floor Scale




FEATURE


- Counting & Percent mode Supported
1 / 15000 high-resolution and a more accurate counting, percentage modes are supported.



- Check-Weighing function
(HI/OK/LO is separately displayed)
Weight and Counting, percent mode are available.

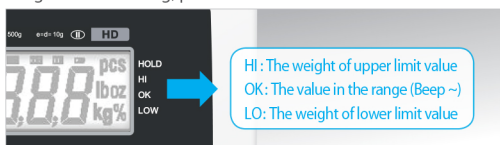

- Easy operation with 9 function keys
Various Function Keys offer easy operation.

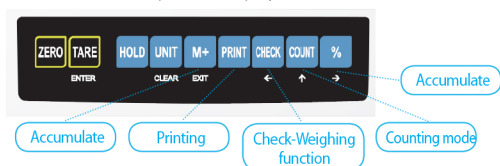

- Rechargeable Battery
The rechargeable battery increases portability and allows HDI to be used in environments where little or no power is available.
(Charging time : 12Hour / Battery life: 80Hour)



OPTION

- iM-Works
iM-Works can display and save a weight value via serial communication(RS-232C) between Scale and PC.



- Ticket Printer (DEP-50)



SPECIFICATION

Platform size (mm)	Capacity (kg)	Readability(kg)
1000 x 1000	500	0.02
1000 x 1000	1000	0.05
1200 x 1200	500	0.02
1200 x 1200	1000	0.05
1200 x 1200	2000	0.1
1200 x 1500	2000	0.1
1200 x 1500	3000	0.1
1500 x 1500	1000	0.05
1500 x 1500	2000	0.1
1500 x 1500	3000	0.1
1500 x 1500	5000	0.2
1500 x 2000	1000	0.1
1500 x 2000	2000	0.1
1500 x 2000	3000	0.1
1500 x 2000	5000	0.2
2000 x 2000	1000	0.1
2000 x 2000	2000	0.1
2000 x 2000	3000	0.1
2000 x 2000	5000	0.2
2000 x 3000	2000	0.2
2000 x 3000	3000	0.2
2000 x 3000	5000	0.2

APPLICATION

Parts Production
Paint Processing
Industrial production
Logistics Center



CAS BLDG., 1315, YANGJAE-DAERO,
GANGDONG-GU, SEOUL, KOREA

TEL 82 2 2225 3500
FAX 82 2 475 4668

Specifications are subject to change without notice improvement

