





MK - LU

Part 2

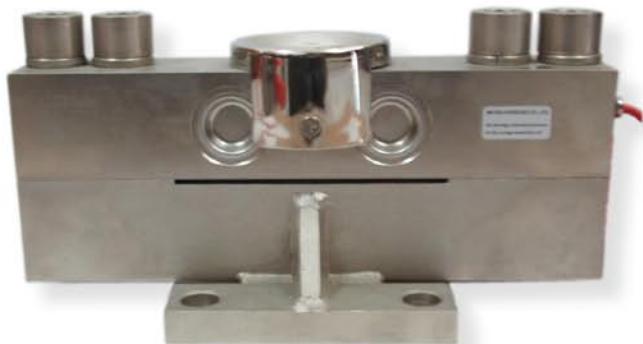

FEATURE:

- High precision, reliability and super stability
- Design of stainless steel ball, cup has super functions in self-restoring corner pre-adjustment
- Anti-walloping and anti side force
- Easy to install good interchangeability
- 5 core high quality orange cable
- Application to truck scale, railway scale hopper scale and other weighing equipment

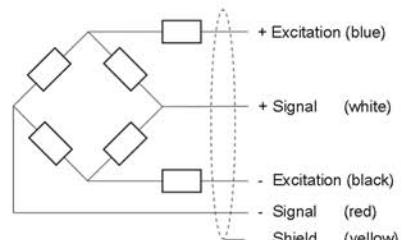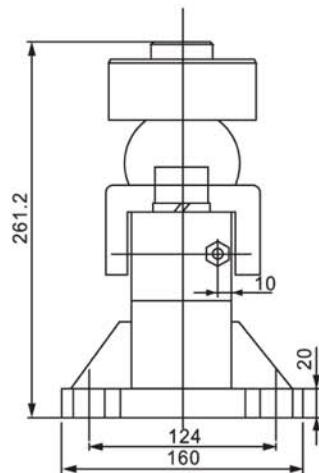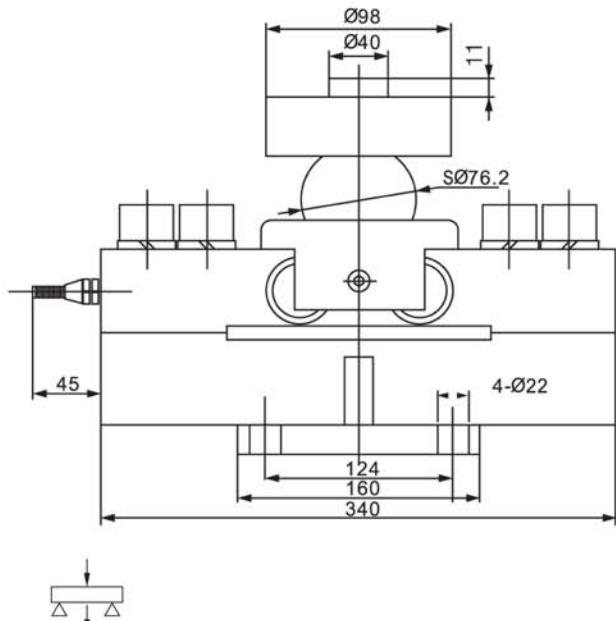

SPECIFICATION

Rated capacities (Emax)	50t	Temperature, compensated	-10°C~+40°C
Rated Output	2.0±0.002mV/V	Temperature, operating	-30°C~+70°C
Accuracy class	C5	Maximum safe overload	120%F.S
		Ultimate overload	200%F.S
Zero balance	±1%F.S	Excitation, recommended	10-12V DC
TC ZERO	±0.02%F.S/10°C	Excitation, maximum	15V DC
TC SPAN	±0.02%F.S/10°C	Protection class	IP68
Input resistance	750±10Ω	Construction	Alloy Steel
Output resistance	702±3Ω	Cable	Length: 16m
Insulation resistance	≥5000MΩ		Diameter: Φ 6mm

