


FEATURES

- Robust design and easy installation
- Strong against shock or side force
- Protection class IP67

SPECIFICATIONS

Max. capacity	tf	10, 25, 30
Rated output	mV/V	2.0 ± 0.004
Zero balance	mV/V	0 ± 0.02
Combined error	%	0.03
Repeatability	%	0.02
Creep for 30min.	%	0.03
Temperature effect on		
Zero Value	%/10°C	0.03
Output value	%/10°C	0.015
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	800 ± 40
Output	Ω	700 ± 7
Insulation	M Ω	> 2,000
Compensated temperature range	°C	- 10 to +40
Operating temperature range	°C	- 20 to +80

DIMENSIONS

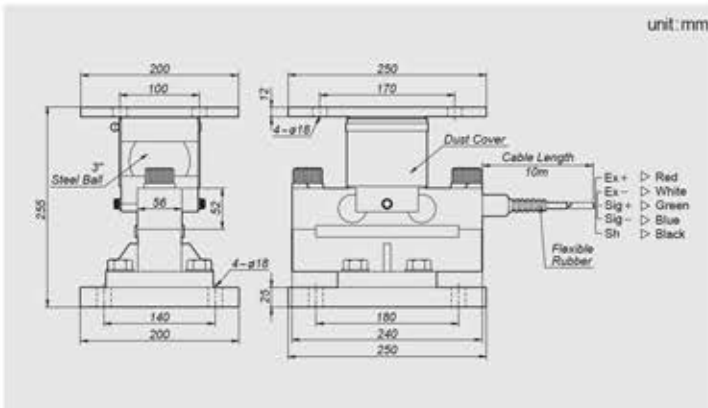

Material

Paint finished steel

Cable

Braided shield 4-wire round cable with P.V.C-jacket

Ordering Information

DSB - XXB

Capacity in ton