


## Precision Density Hydrometers acc.ToDIN12791

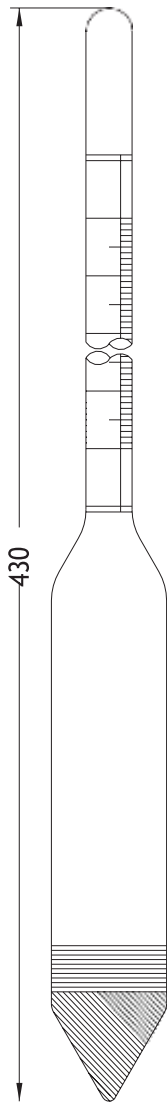

### L 20 series

Ref. temperature: 20 °C, Scale division: 0.0002g/cm<sup>3</sup>, error limit: ± 0.0002g/cm<sup>3</sup> without thermometer, total length: 430 mm, each packed in a square plastic sleeve

| Type    | Measuring range   | Art.-No. |
|---------|-------------------|----------|
| L 20    | g/cm <sup>3</sup> |          |
| L20-060 | 0.600-0.620       | 3112001  |
| L20-062 | 0.620-0.640       | 3112002  |
| L20-064 | 0.640-0.660       | 3112003  |
| L20-066 | 0.660-0.680       | 3112004  |
| L20-068 | 0.680-0.700       | 3112005  |
| L20-070 | 0.700-0.720       | 3112006  |
| L20-072 | 0.720-0.740       | 3112007  |
| L20-074 | 0.740-0.760       | 3112008  |
| L20-076 | 0.760-0.780       | 3112009  |
| L20-078 | 0.780-0.800       | 3112010  |
| L20-080 | 0.800-0.820       | 3112011  |
| L20-082 | 0.820-0.840       | 3112012  |
| L20-084 | 0.840-0.860       | 3112013  |
| L20-086 | 0.860-0.880       | 3112014  |
| L20-088 | 0.880-0.900       | 3112015  |
| L20-090 | 0.900-0.920       | 3112016  |
| L20-092 | 0.920-0.940       | 3112017  |
| L20-094 | 0.940-0.960       | 3112018  |
| L20-096 | 0.960-0.980       | 3112019  |
| L20-098 | 0.980-1.000       | 3112020  |
| L20-100 | 1.000-1.020       | 3112021  |
| L20-102 | 1.020-1.040       | 3112022  |
| L20-104 | 1.040-1.060       | 3112023  |
| L20-106 | 1.060-1.080       | 3112024  |
| L20-108 | 1.080-1.100       | 3112025  |
| L20-110 | 1.100-1.120       | 3112026  |
| L20-112 | 1.120-1.140       | 3112027  |
| L20-114 | 1.140-1.160       | 3112028  |
| L20-116 | 1.160-1.180       | 3112029  |
| L20-118 | 1.180-1.200       | 3112030  |
| L20-120 | 1.200-1.220       | 3112031  |
| L20-122 | 1.220-1.240       | 3112032  |
| L20-124 | 1.240-1.260       | 3112033  |
| L20-126 | 1.260-1.280       | 3112034  |
| L20-128 | 1.280-1.300       | 3112035  |

| Type    | Measuring range   | Art.-No. |
|---------|-------------------|----------|
| L 20    | g/cm <sup>3</sup> |          |
| L20-130 | 1.300-1.320       | 3112036  |
| L20-132 | 1.320-1.340       | 3112037  |
| L20-134 | 1.340-1.360       | 3112038  |
| L20-136 | 1.360-1.380       | 3112039  |
| L20-138 | 1.380-1.400       | 3112040  |
| L20-140 | 1.400-1.420       | 3112041  |
| L20-142 | 1.420-1.440       | 3112042  |
| L20-144 | 1.440-1.460       | 3112043  |
| L20-146 | 1.460-1.480       | 3112044  |
| L20-148 | 1.480-1.500       | 3112045  |
| L20-150 | 1.500-1.520       | 3112046  |
| L20-152 | 1.520-1.540       | 3112047  |
| L20-154 | 1.540-1.560       | 3112048  |
| L20-156 | 1.560-1.580       | 3112049  |
| L20-158 | 1.580-1.600       | 3112050  |
| L20-160 | 1.600-1.620       | 3112051  |
| L20-162 | 1.620-1.640       | 3112052  |
| L20-164 | 1.640-1.660       | 3112053  |
| L20-166 | 1.660-1.680       | 3112054  |
| L20-168 | 1.680-1.700       | 3112055  |
| L20-170 | 1.700-1.720       | 3112056  |
| L20-172 | 1.720-1.740       | 3112057  |
| L20-174 | 1.740-1.760       | 3112058  |
| L20-176 | 1.760-1.780       | 3112059  |
| L20-178 | 1.780-1.800       | 3112060  |
| L20-180 | 1.800-1.820       | 3112061  |
| L20-182 | 1.820-1.840       | 3112062  |
| L20-184 | 1.840-1.860       | 3112063  |
| L20-186 | 1.860-1.880       | 3112064  |
| L20-188 | 1.880-1.900       | 3112065  |
| L20-190 | 1.900-1.920       | 3112066  |
| L20-192 | 1.920-1.940       | 3112067  |
| L20-194 | 1.940-1.960       | 3112068  |
| L20-196 | 1.960-1.980       | 3112069  |
| L20-198 | 1.980-2.000       | 3112070  |

Complete set consisting of 70 pcs. L20-060 to L20-198: **Art.-No.: 3112001-3112070**

#### Surface tension:

Low = Class L (yellow) up to 1.000g/cm<sup>3</sup>  
 High = Class H (blue) above 1.000g/cm<sup>3</sup>  
 Medium = Class M (red) on request

#### Additional order no.

...../03 with works calibration certificate  
 ...../04 with DAkkS calibration certificate