




DYNRA
PRIVAND
PALM OIL MILL CHAIN

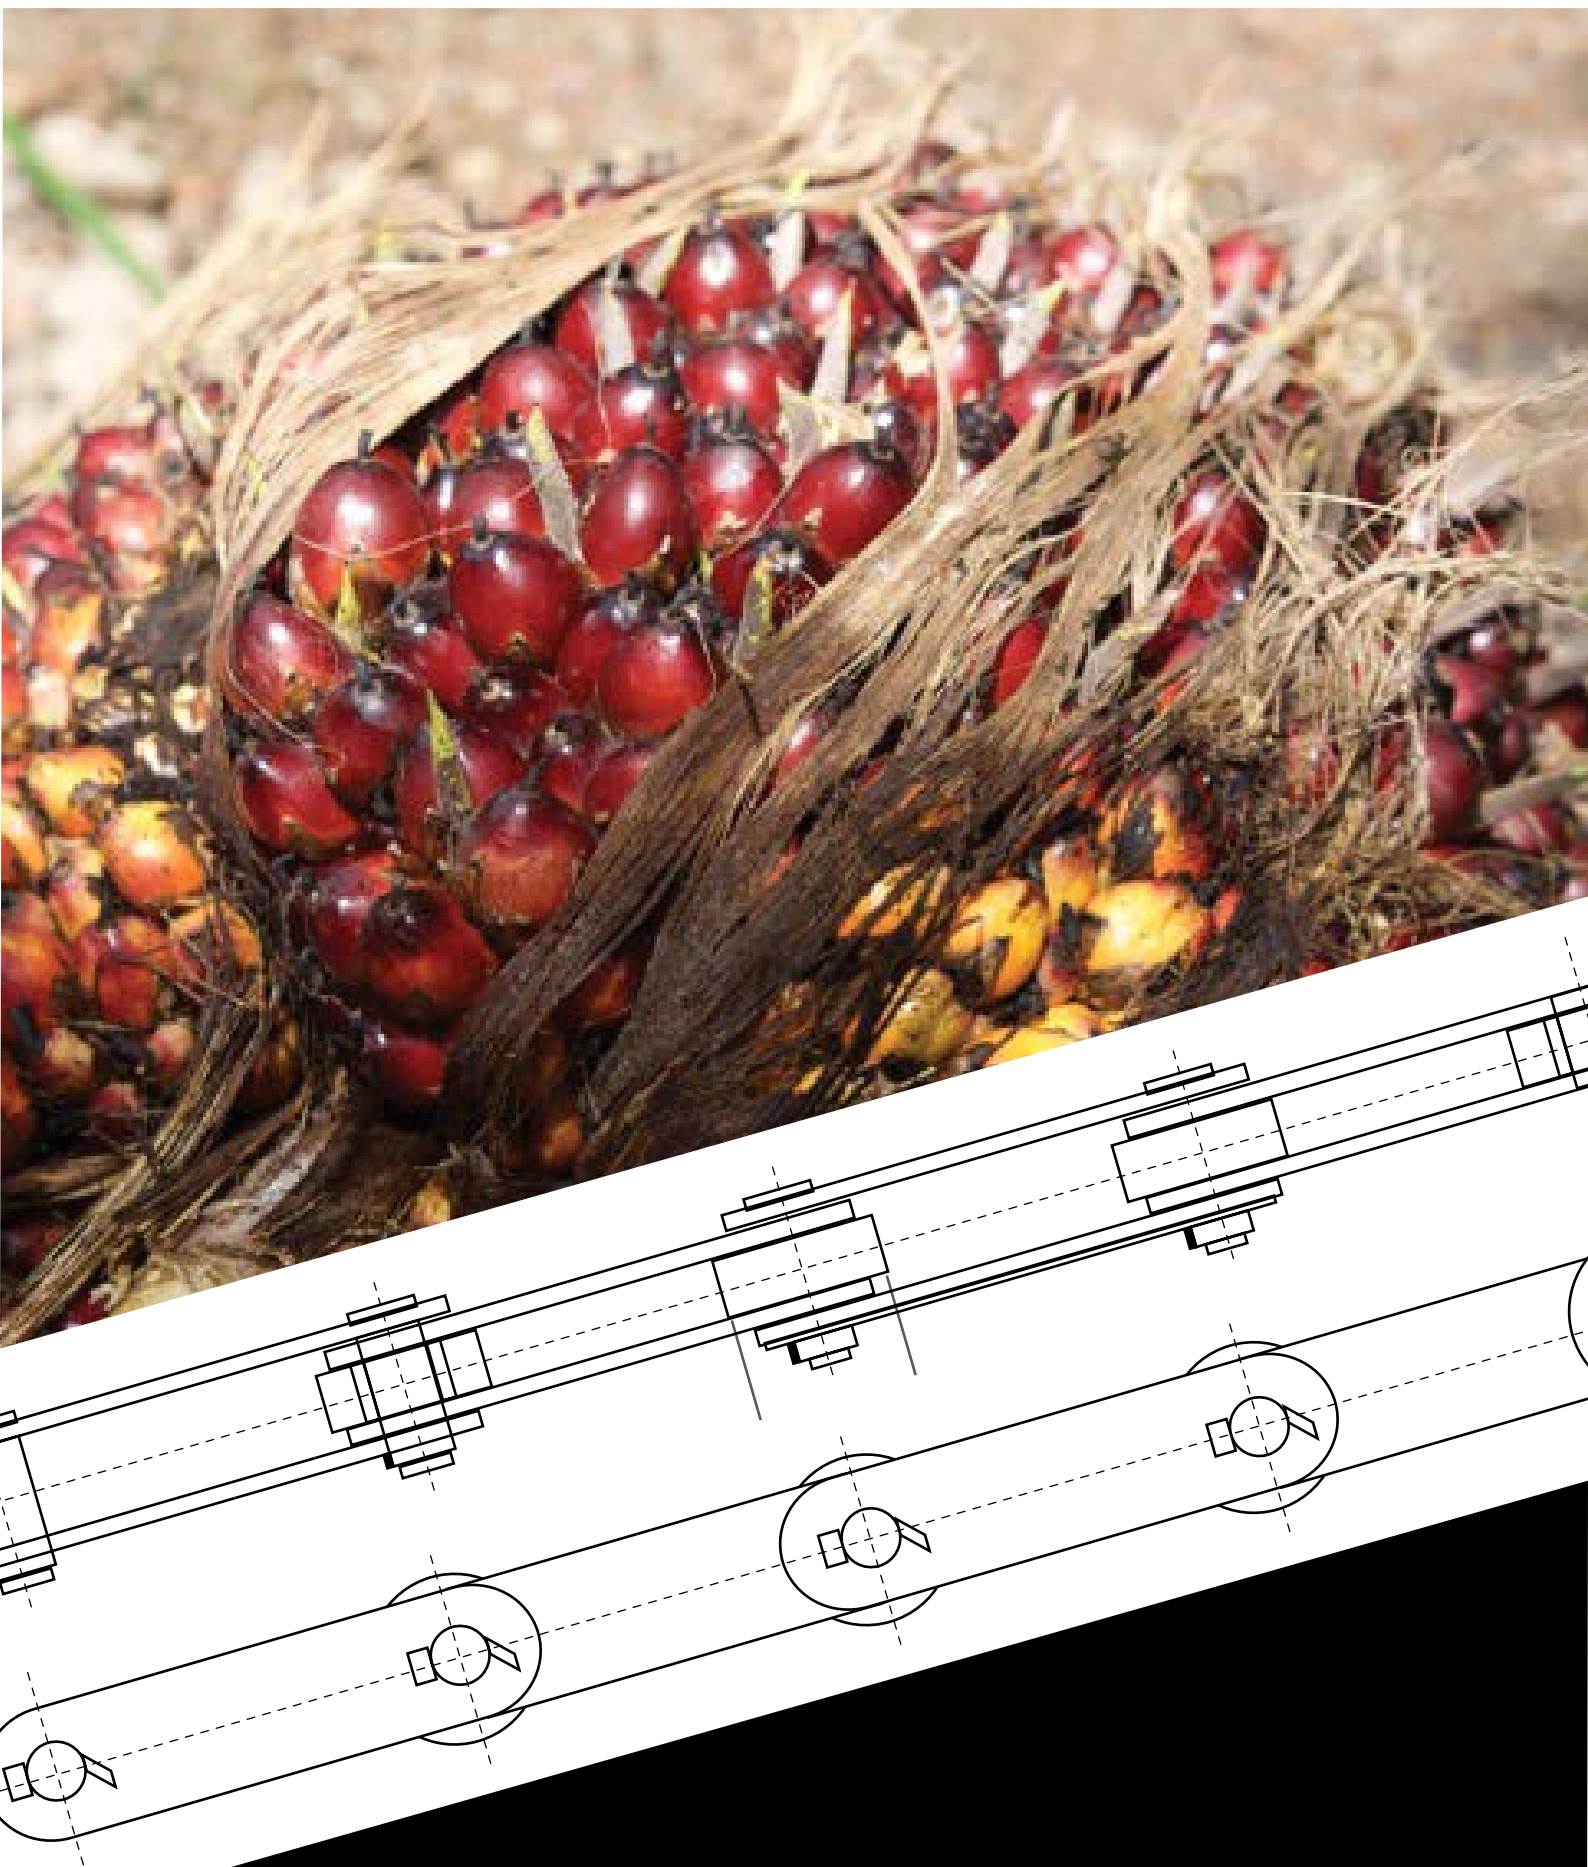

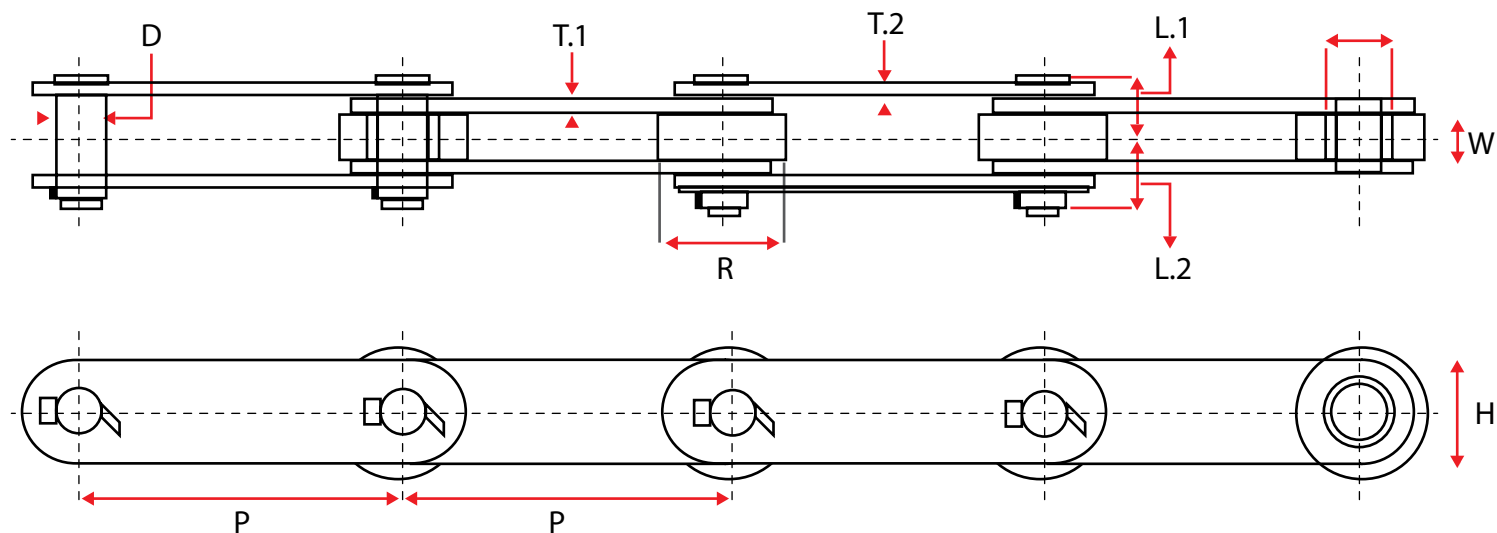


CHAIN SOLID T-PIN TYPE

Dyna Chain No.	Pitch (P)	Inner Width (W)	Roller Dia. (R)	Pin Dia. (D)	L1	L2	Plate Height (H)	Plate Thickness T1	Plate Thickness T2	Ultimate Load	Weight kg/m
DY426R	101.6	19.0	47.6	19.0	24.1	30.1	38.1	5.1	5.1	26.000 lbf	6.9
DY436R	101.6	25.4	47.6	19.0	28.7	29.5	50.8	6.3	6.3	36.000 lbf	14.1
DY645R	152.4	25.4	66.7	22.0	35.5	42.5	50.8	6.3	6.3	45.000 lbf	10.5
DY650R	152.4	25.4	66.7	26.9	37.0	44.0	50.8	7.8	7.8	50.000 lbf	12.9
DY670R	152.4	25.4	66.7	26.9	37.0	44.0	50.8	9.5	8	70.000 lbf	15

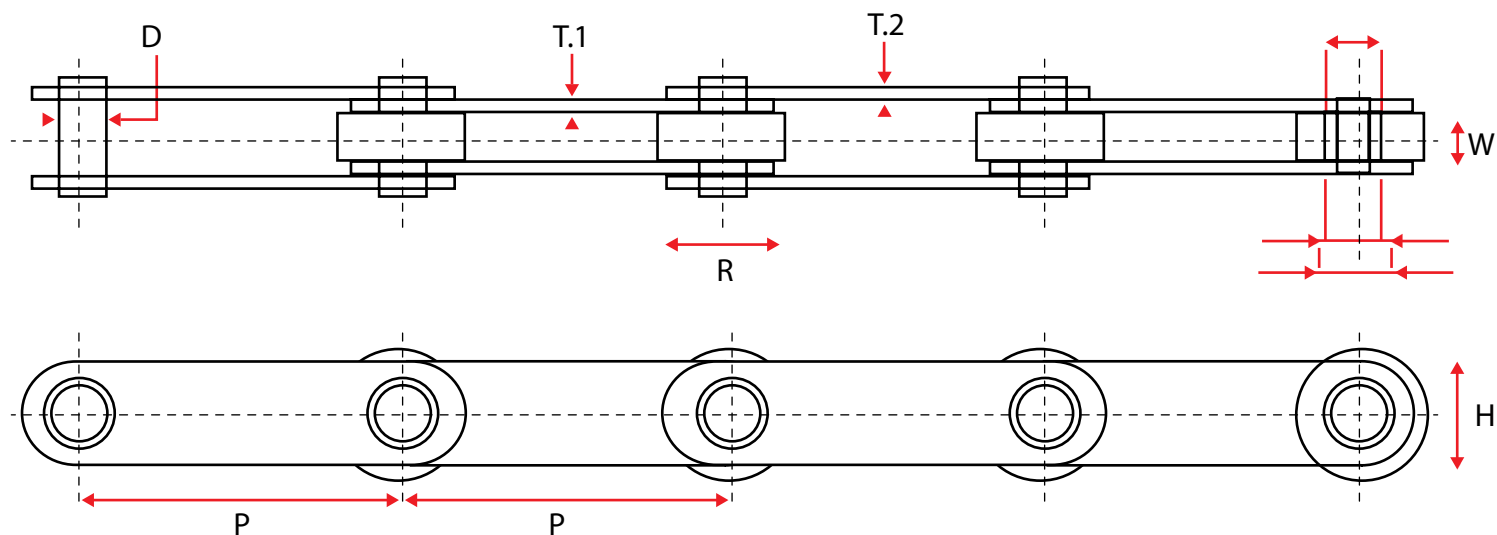


CHAIN HOLLOW PIN CHAIN TYPE

Dyna Chain No.	Pitch (P)	Inner Width (W)	Roller Dia. (R)	Pin Dia. (D)	Bush	Hollow Bore (d)	Plate Height (H)	Plate Thickness T1	Plate Thickness T2	Ultimate Load	Weight kg/m
DY430R HP	101.6	19.0	47.6	20.0	19.0	13.2	38.1	5.1	5.1	30.000 lbf	6.4
DY466R HP	101.6	25.4	66.7	28.0	26.9	20.1	51.0	5.1	7.1	45.000 lbf	13.8
DY636R HP	152.4	25.4	66.7	28.0	26.9	20.1	50.8	6.3	6.3	36.000 lbf	9.7

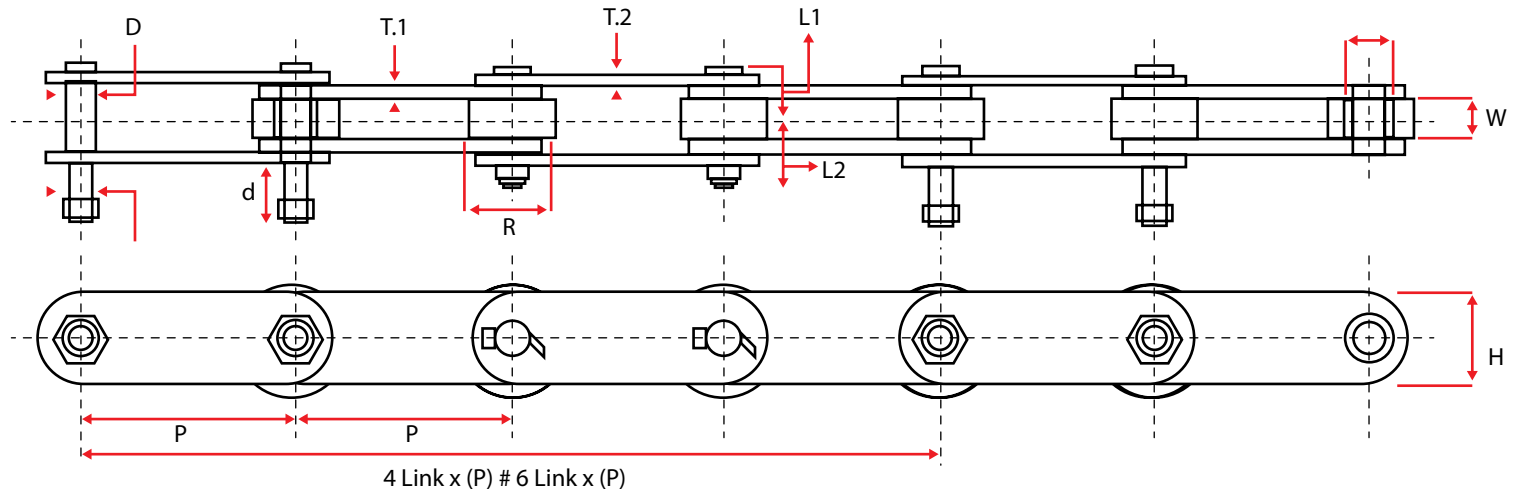

CHAIN SOLID EXTENDED PIN WITH LOCK NUT TYPE

Dyna Chain No.	Pitch (P)	Inner Width (W)	Roller Dia. (R)	Pin Dia. (D)	Plate Height (H)	Plate Thickness		Ultimate Load	Pin (d)	Lock Nut	Weight kg/m
						T1	T2				
DY426R-4LEP	101.6	19.0	47.6	19.0	38.1	5.1	5.1	26.000 lbf	36	M 16	7.55
DY426R-6LEP	101.6	19.0	47.6	19.0	38.1	5.1	5.1	26.000 lbf	36	M 16	7.45
DY436R-4LEP	101.6	19.0	47.6	19.0	38.1	6.3	6.3	36.000 lbf	36	M 16	8.5
DY436R-6LEP	101.6	19.0	47.6	19.0	38.1	6.3	6.3	36.000 lbf	36	M 16	8.4
DY645R-4LEP	152.4	25.4	66.7	26.9	50.8	6.3	6.3	45.000 lbf	39.3	M 20	11.6
DY645R-6LEP	152.4	25.4	66.7	26.9	50.8	6.3	6.3	45.000 lbf	39.3	M 20	11.5
DY650R-4LEP	152.4	25.4	66.7	26.9	50.8	7.8	7.8	60.000 lbf	44	M 24	13.9
DY650R-6LEP	152.4	25.4	66.7	26.9	50.8	7.8	7.8	60.000 lbf	44	M 24	13.7
DY670R-4LEP	152.4	25.4	66.7	26.9	50.8	9.5	8	70.000 lbf	44	M 24	16
DY670R-6LEP	152.4	25.4	66.7	26.9	50.8	9.5	8	70.000 lbf	44	M 24	15.6

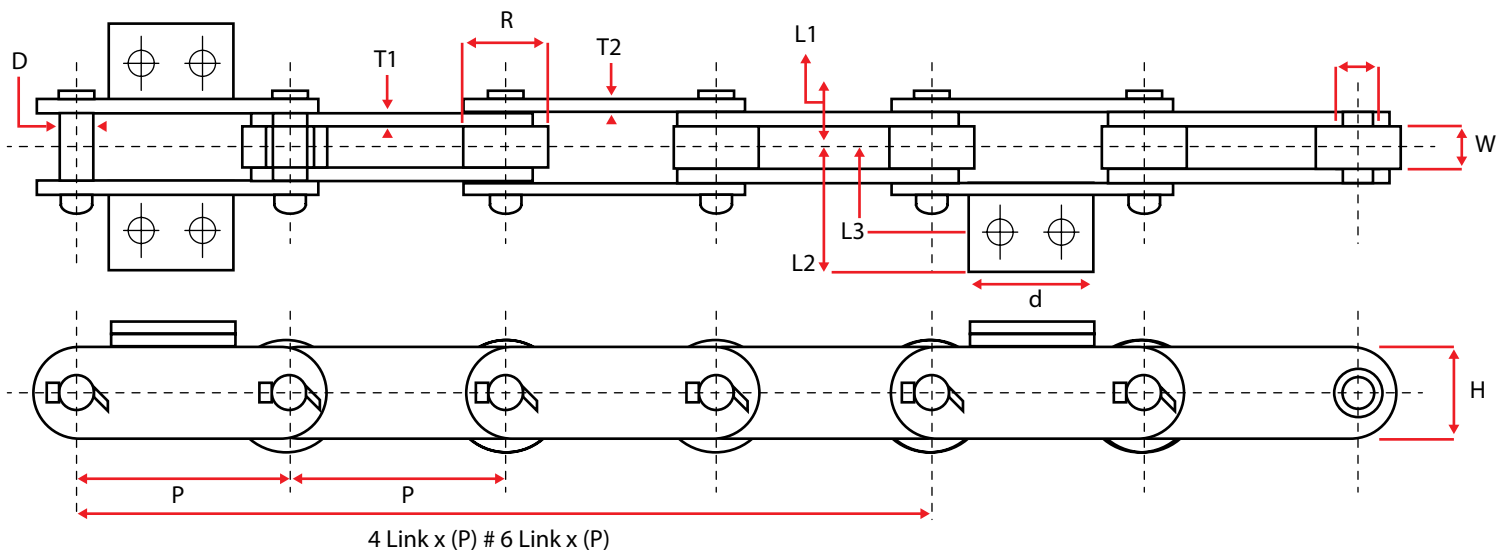

CHAIN SOLID PIN WITH ATTACHMENT TYPE (BK24 / SK2)

Dyna Chain No.	Pitch (P)	Inner Width (W)	Roller Dia. (R)	Pin Dia. (D)	Plate Height (H)	Plate Thickness		Ultimate Load	Attachment Area (d)	Weight kg/m
						T1	T2			
DY426R-4LSK2	101.6	19.0	47.6	19.0	38.1	5.1	5.45	26.000 lbf	63.5	8.1
DY426R-6LSK2	101.6	19.0	47.6	19.0	38.1	5.1	5.45	26.000 lbf	63.5	7.85
DY426R-4LBK24	101.6	19.0	47.6	19.0	38.1	5.1	5.45	26.000 lbf	63.5	9
DY426R-6LBK24	101.6	19.0	47.6	19.0	38.1	5.1	5.45	26.000 lbf	63.5	8.41
DY436R-4LSK2	101.6	19	47.6	19	38.1	6.3	6.3	36.000 lbf	63.5	9.23
DY436R-6LSK2	101.6	19	47.6	19	38.1	6.3	6.3	36.000 lbf	63.5	8.88
DY436R-4LBK24	101.6	19	47.6	19	38.1	6.3	6.3	36.000 lbf	63.5	10.2
DY436R-6LBK24	101.6	19	47.6	19	38.1	6.3	6.3	36.000 lbf	63.5	9.6

PT HASEN JAYA BERSAMA
LTC Glodok Lt. 2 Blok C8 No. 7
Jl. Hayam Wuruk No. 127 Jakarta Barat 11180