

LONKING 龙工

Efficiency Rules the Future

CDM6550F HYDRAULIC EXCAVATOR



- OPERATING WEIGHT:** 51000kg
- ENGINE POWER:** 300kW
- BUCKET CAPACITY:** 3.2m³
- TRAVEL SPEED:** 3.4/5.3km/h



Jakarta Head Office
Golden Nagas Mediaranch 1
Jl. Pondok Indah Utara Blok. A No. 28A-8B
Pondok Indah Kcpa - Jakarta Selatan - DKI Jakarta
Telp: 021 36154054

Makassar Branch Office
Kawasan Industri Mediaranch 1
Jl. Perintis Kemerdekaan KM. 10, Makassar
Sulawesi Selatan Telp: 041 8633556


Tangerang Branch Office
Kawasan Industri Mekarum Blok P2
No. 1, J. Perintis Kemerdekaan, Sukamulya, Cikupa,
Tangerang - Banten
Telp: 021 7665008

Samarinda Branch Office
Kawasan Industri Mekarum Blok P2
Jl. Perintis Kemerdekaan KM. 10, Samarinda
Kalimantan Timur Telp: 0541 23379

Surabaya Branch Office
Jl. Raya Giliang, Giliang Selatan, Giliang Kiri, Temon,
Surabaya - Jawa Timur
Telp: 031 9976278

Bantaeng Site Project
Desa Pajene, Pajene, Bantaeng
Sulawesi Selatan

Morowali Site Project
Kotifu, Bihodiga,
Morowali - Sulawesi Tengah

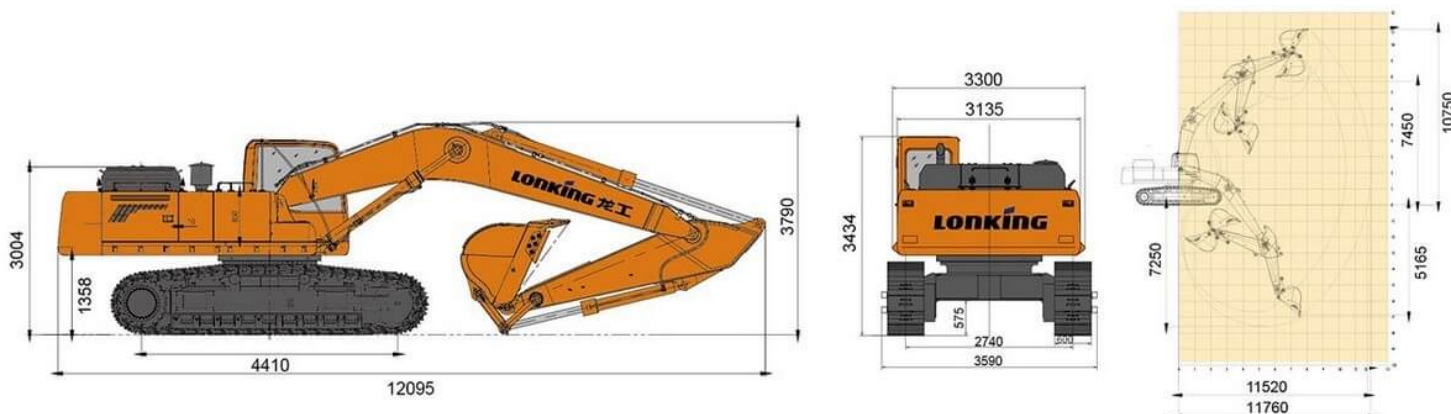

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	51000 kg
	Boom length	7000 mm
	Arm length	2800 mm
	Standard bucket	3.2 m ³ (Rock)
	Max.Travel speed	3.4/5.3 km/h
	Max.Swing speed	8 rpm
	Grade ability	35°(70%)
	Ground pressure	87.1 kPa
	Max.Traction force	396 kN
Engine	Engine model	6WG1-XDHAG-03-C3
	Rated power	300 kW/1800 rpm
	Max.Torque	1898/1400 N.m/rpm
	Displacement	15.681 L
	Fuel tank	680 L
Hydraulic	Max.Flow(total)	360×2 L/min
	Max.Working pressure	34.3 MPa
	Max.Pilot pressure	3.9 Mpa
	Max.Arm digging force	220 kN(ISO)
	Max.Bucket digging force	258 kN(ISO)
	Hydraulic oil tank	480 L
Chassis	Track width	600 mm
	Track shoes number	50(each side)
	Carrier rollers number	2(each side)
	Track rollers number	9(each side)
Electric	System voltage	24 V
	Battery capacity	24 V,120 Ah×2

PRODUCT FEATURES

Isuzu Turbocharged Engine, Large Displacement, Strong Power
Adopt Independent Cooling System to Reduce Power Loss and Noise
Advanced Hydraulic System
Combined C type closed frame improves rigidity and strength of rotary platform.
Comfortable ROPS Cabin with 2.7m ³ Operational Space
No Frame Cab Glasses to Enlarge Operation Field of View
Double-rib Rock Track Shoes, Chassis Reinforcement, More reliable and Wear-resistant
Heavy-duty Working Device with High Strength Low Alloyed Steels

OPTIONAL

Breaking hammer & pipeline
Work warning light
Walking alarm
Top protecting net
Front protecting net
700 mm wide track shoes
800 mm wide track shoes



Jakarta Head Office
Galeri Niaga Mediterania 1
Jl. Pantai Indah Utara II Blok. X3 No. G8A-8B
Pantai Indah Kapuk, Jakarta Utara - DKI Jakarta.
Telp : 021 38769054

Makassar Branch Office
Kawasan Ruko Insignia Residence No A12B,
Jl. Perintis Kemerdekaan KM6, Makassar -
Sulawesi Selatan. Telp : 041 18037636

Tangerang Branch Office
Kawasan Industri Milenium Blok P2
No.3 Jl. Pemuda Tigaraksa, Sukamulya, Cikupa,
Tangerang - Banten.
Telp : 021 59645008

Samarinda Branch Office
Kawasan Mangrupalas Business Center Blok D20,
Jl. Ampara Pergudangan, Simpang Pasir Palaran,
Samarinda - Kalimantan Timur. Telp : 05417263751

Surabaya Branch Office
Jl. Raya Gilang, Gilang Selatan, Gilang Kec. Taman,
Sidoarjo - Jawa Timur
Telp. 031 99794078

Bantaeng Site Project
Jl. Dusun Mawang,
Desa Papanloe, Pajukukang,
Bantaeng - Sulawesi Selatan.

Morowali Site Project
Fatufia, Bahodopi,
Morowali - Sulawesi Tengah.