



IR60i

Best Seller Non-Contact Infrared Thermometer



SPECIFICATIONS


Temperature range	20 ~ 50 °C
Response time	1 second
Resolution	0.1°C (0.1°F)
Spectral response	8 ~ 14µm
Emissivity	fix
Alarm	target temp higher, LCD shows "H" target temp lower, LCD shows "L"
Standard operation	indoor
Operating temperature	20 ~ 27°C

Storage temperature	-20 ~ 65°C
Relativity humidity	10% ~ 90% RH operating <80% RH storage
Power	2 x 1.5V (AAA battery)
Size	195 x 44 x 95mm
Weight	200g (including battery)
Safety	"CE", "Ctick", "RoHS"
Standard accessories	batteries, instruction manual, certificate of product conformance,

Corona
Avian Flu SARS Ebola
Swine Flu

virus threat

Other Feverish Condition

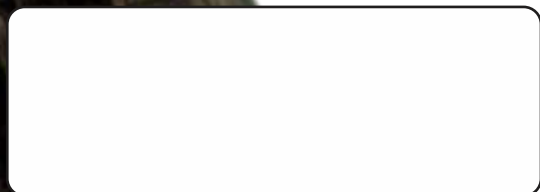

IRtek International
P.O. BOX 435
Joondalup, W.A. 6919
Australia

For more information :
Email : sales@irtek-temp.com
Website : www.irtek-temp.com

