
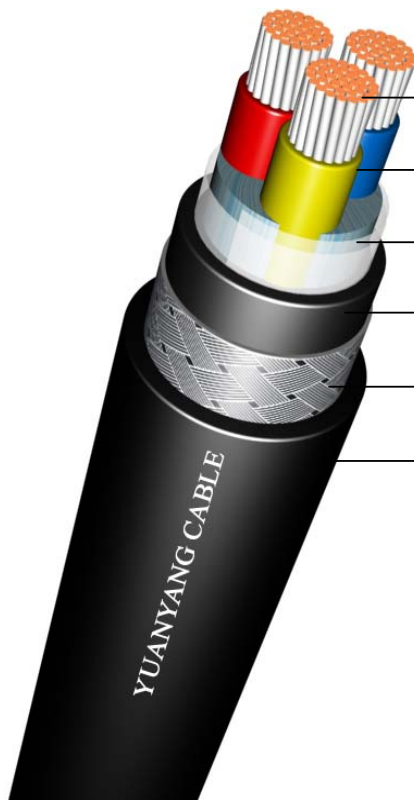


CJPF96-SC

XLPE insulated shipboard power cables, 0.6/1kV

Tinned-Copper wire conductor, XLPE insulated, Galvanized steel wire braided and Thermosetting polyolefin sheathed

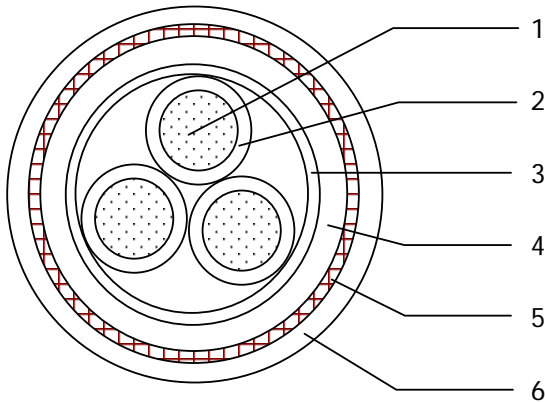

- 1. Conductor : Tinned copper conductor
- 2. Insulation : XLPE insulated
- 3. Wrapping : Tape
- 4. Inner sheath : Low-smoke Halogen-free Flame-retardant Polyolefin sheathed (SHF-1)
- 5. Armour : Galvanized steel braided
- 6. Outer sheath : Low-smoke Halogen-free Flame-retardant Polyolefin outer sheathed (SHF-1)

Product type approved by :

**CCS, LR, ABS, DNV, BV, GL,
NK, RINA**

- Standards
- Construction : IEC 60092-350, 353
- Conductor : IEC 60228 Class2
- Insulation : IEC 60092-351
- Sheath : IEC 60092-359
- Flame retardant : IEC 60332-3-22
- Halogen free : IEC 60754
- Low smoke : IEC 61034

