


## CP0611 HAZED - The "Spark Resistant" 1" impact for Explosive Environment

### Benefits

- ▶ Best 1" impact to loosen big bolts in Explosive Environment
- ▶ Operator comfort and control thanks to perfect ergonomic design even at VERY high torque
- ▶ "Constant & progressive" torque thanks to the 2-Jaw clutch
- ▶ Unmatched durability with reliable mechanism & durable housing
- ▶ Ideal for Heavy Industrial Maintenance and Production applications

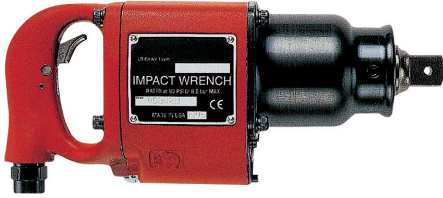

### Features

- ▶ Super Industrial 1" impact wrench
- ▶ Reliable 2-jaw clutch with the highest Blows per Minutes
- ▶ Full Teasing (inside) trigger with durable reverse
- ▶ Spark Resistant housing thanks to Zinc & Aluminum alloy
- ▶ Indestructible steel clutch housing
- ▶ Compact 3-part construction & easy maintenance
- ▶ Hole type socket retainer with O-ring
- ▶ 360° adjustable D-type side handle

Technical description		
Part number	T022582	
Model	CP0611 HAZED	
Joint type: soft	yes	
Joint type: hard	yes	
Handle type	D-Handle Inside Trigger	
Square drive	1"	
Working Torque Range (fwd)	1,220-2,440 Nm	<i>900-1,800</i>
Maximum Torque (fwd)	3790 Nm	<i>2800 ft.lbs</i>
Maximum Torque (reverse)	3790 Nm	<i>2800 ft.lbs</i>
Free speed	3500 rpm	
Blows per minute	1020	
Net weight	10.2 kg	<i>22.5 lb</i>
Power/weight ratio	371.6 Nm/kg	<i>124.4 ft.lb/lb</i>
Length	318 mm	<i>12.52"</i>
Side to center	46 mm	<i>1.81"</i>
Actual air consumption	22.6 l/s	<i>48 cfm</i>
Air inlet thread size	0.5 "	
Noise level	97 db(A)	
Sound Power	108 db(A)	
Vibration (ISO-8662-7)	10.9 m/s <sup>2</sup>	
Vibration α (ISO-28927-2)	16.1 m/s <sup>2</sup>	
Vibration K (ISO-28927-2)	4.5 m/s <sup>2</sup>	
Socket retainer	Hole	
Clutch type	2-jaw clutch	
Bolt size	M36	