

CP7755 Series

4 innovative ½" impact wrenches



*No more guessing,
get the power you need!*

People.
Passion.
Performance.

 **Chicago
Pneumatic**

CP7755 Series

No more guessing, get the power you need!



ERGONOMIC

One-hand reverse system
(New Side2Side system)

LIGHTWEIGHT

- Composite motor housing
- 4.2 lbs. - 1.93 kg*

* CP7755 Air Flex Mini model

THE BEST AND
THE MOST AJUSTABLE
POWER CONTROL
FOR PNEUMATIC TOOLS

Highly innovative and very easy to use
power control



ALSO EXISTS IN A
2" ANVIL VERSION

Inlet	Anvil	Model	Part #
Integrated Air Flex Mini	Short	CP7755 Air Flex Mini	8941077551
	2" long	CP7755-2 Air Flex Mini	8941077553
Standard 360° swivel inlet	Short	CP7755	8941077550
	2" long	CP7755-2	8941077552

The CP7755 is
also available with
360° swivel air inlet



HIGH ACCESSIBILITY
HIGH MANEUVERABILITY

Air Flex Mini



The patented **Air Flex Mini** air inlet feature provides **freedom of movement** and turns any rigid hose into a flexible one, thanks to a **multi-axis air connection swivel**.



PATENTED

This effort-saving innovation ensures the hose is always in the ideal position and gives easier access to hard-to-reach areas.



CP7755 Air Flex Mini



Model
equipped with
standard inlet

Wheels assembly – **Forward** No more overtightening

PATENT
PENDING


**REGULATOR
WHEEL IN
ALUMINUM**

➡ **9 SETTINGS
FROM 5%
TO 45%**

5	10	15
20	25	30
35	40	45



➡ **2 OTHER
SETTINGS**



How to **reach the right torque**
with the “no overtightening”
method:

5 10 15 20

- **Step 1:** Consider the vehicle manufacturers specified torque rating and the airline installation
- **Step 2:** Consider the 3 main variables that can affect your targeted torque: air line installation, joint type and operating time.
- **Step 3:** Set the CP7755 Series to be always **below** torque specification = **No more overtightening**

**Final approach to reach
the right torque = torque wrenches**

Pre-tightening



Final tightening



IDEAL TORQUE

Dedicated to tire changing, from light to heavy vehicles



The CP7755 allows the operator to use the power needed according to the type of application.

Wheels removing – **Reverse** Full power



**960 ft. lbs. – 1,300 Nm
of max torque in reverse**



**IN REVERSE:
Full power in any
regulator position**



Over 110 years of experience

Since 1901 the Chicago Pneumatic (CP) name has represented reliability and attention to customer needs, with construction, maintenance and production tools and compressors designed for specific industrial applications. Today, CP has a global reach, with local distributors around the world.


Our people start every single day with a passion to research, develop, manufacture and deliver new products that are meant to meet your needs not only today, but tomorrow as well.

To learn more about our extensive range of tools, construction equipment, industrial and portable compressors, accessories and workshop equipment, please visit www.cp.com.

AIR LINE ACCESSORIES

Tool inlet size	Type	Tool max air consumption	Hose Recommended Diameter
1/4" 6.5 mm	NPT	5.6 cfm 2.6 l/s	3/8" 10 mm

*Set up made with EF coupling ISO6150B type (NA, France, Italy)

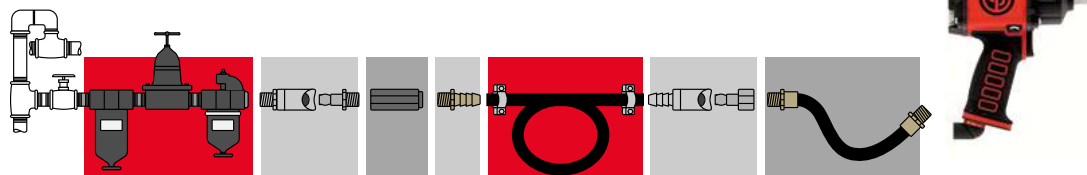


MUST HAVE	FRL	COUPLING & NIPPLE	SAFETY	AIR FUSE	HOSE CONNECTOR	MUST HAVE	HOSE & CLAMPS	COUPLING & NIPPLE	SAFETY & ERGONOMICS	HOSE WHIP

Composite FRL 1/4" NPT 2 stages 8940171944	EF Coupling Male 1/4" NPT 6158104850 Nipple Male 3/8" NPT 6158105630	Air Fuse Low Flow 3/8" NPT 6158112470	Hose connector NPT Diameter 3/8" / 10 mm 8940175944	Effi Max Hose 65.6 ft / 20 m Diameter 3/8" / 10 mm 8940169921 Simple Pressure Clamp Diameter 3/8" / 10 mm 6158109850 <i>Order 2 units</i>	EF Coupling Hose connector Diameter 3/8" / 10 mm 6158105320 Nipple Female 1/4" NPT 6158105650	Hose Whip Thread 1/4" Diameter 3/8" / 10 mm CA047270
---	---	--	--	--	--	--

WATCH THE CP7755 SERIES IN ACTION!

Check out the video on YouTube



TUNE-UP KIT

Tool model	Part number
For all models	8940176226

PROTECTIVE COVER

Tool model	Part number
For all models	8940176299

OIL

Part number	Volume
CA149661	4 oz / 120 ml
CA000046	20.8 oz / 591 ml
P089507	1 gal. / 3.8 L



PT. Kenco Primadea
 Ruko Multiguna Blok C 9, Jl. Bintaro Utama Sektor 3 A,
 Bintaro Jaya Tangerang Selatan 15225
 T +62 21 2932 7623/24
 F +62 21 7369 1067
www.kenco.co.id | asidiq@kencoprimatea.com

www.cp.com