

SEWAGE SUBMERSIBLE PUMP SINGLE PHASE




WQD(A)



AR WQD 15 -15 - 1,5 F

AR = ARITA Product
 WQD = Single Phase Submersible Pump
 15 = Rated Flow (m³/h)
 15 = Rated Head (m)
 1,5 = Power (Kw)
 F = Automatic

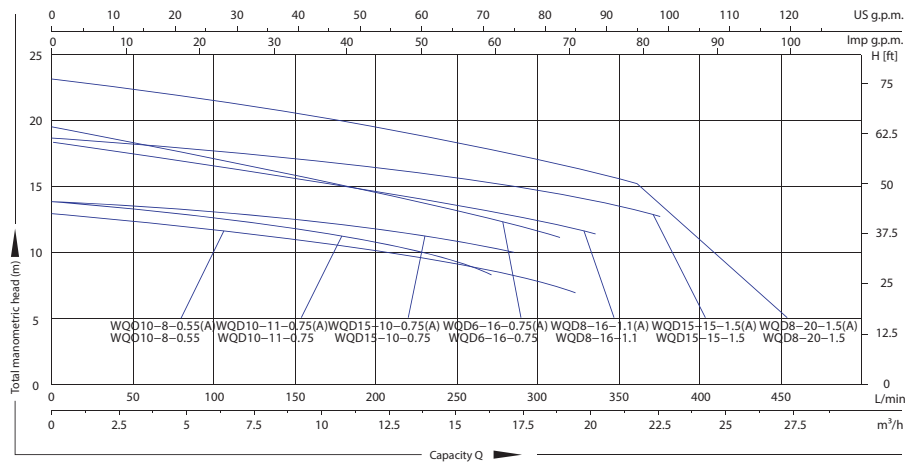

Application Area

Suitable for using in Sump Pit, Sanitary, and any industrial Sewage

Operating limits

Protection class : IP68
 Max. temperature: 400 C
 Max PH : 4—10

Component and Material

Pump Casing : SS304
 Impeller : Cast Iron
 Diffuser : Cast Iron
 Mechanical Seal : Ceramics Graphite
 Motor Chasing : SS304
 Suction Strainer : Cast Iron
 Oil Lubricant : Food Grade
 Type Impeller : Closed Impeller

TIPE	POWER		AUTO	OUTLET (Inch)	Rated Head	Max.Head (m)	Rated Flow	Max Flow (m ³ /h)	G.W (Kg)
	Watt	Hp							
ARWQD10-8-0,55 F	550	0,75	Yes	2	10	13	10	17	20
ARWQD10-11-0,75 F	750	1	Yes	2	11	14	10	18,8	21,5
ARWQD15-10-1,1 F	1100	1,5	Yes	2	10	17	15	20,1	23,5
ARWQD15-15-1.5 F	1500	2	Yes	2	15	19	15	23,5	25,5