


CENTRIFUGAL CHEMICAL PUMP

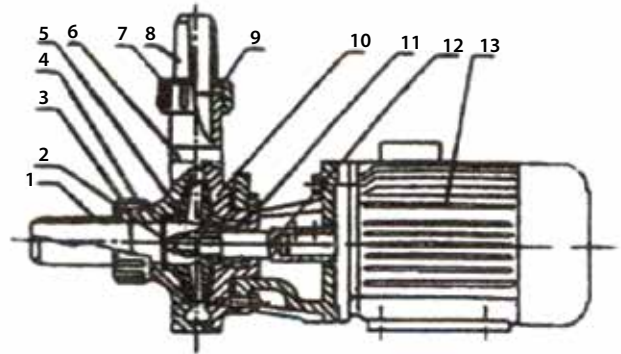

- | | | | |
|---|------------|----|-----------------|
| 1 | Inlet | 8 | Outlet Pipe |
| 2 | Bolt | 9 | Water Mur |
| 3 | Groomet | 10 | Back Casing |
| 4 | Water Mur | 11 | Main Shaft |
| 5 | Impeller | 12 | Mechanical Seal |
| 6 | Pump Shell | 13 | ElectroMotor |
| 7 | Water Mur | | |

AR FS 25 - 11 - z - 220V

AR : Pump code
 FS : Centrifugal Chemical Pump
 25 : Outlet (mm)
 11 : Rated Head (m)
 z : self Priming
 220V : Voltage (V)

Application Area

For transfer any kind of liquid chemical for industry usage. Ex : Electroplating , Chemical Industry, Automotive Industry ,Etc.

Operating limits

Max. temperature: < 50 C
 Component and Material
 Pump Casing : PolyPropelyne
 Impeller : Pprandom
 Shaft : Cast Iron cover with PP
 Mechanical Seal : Ceramics Graphite
 Suction Strainer : Polypropelyne
 Bolt : SUS304
 Insulation Class : F

TIPE	POWER		Speed (Rpm)	Inlet (mm)	Outlet (mm)	Self Priming	Max.Particel (mm)	Rated Flow (m3/h)	Rated Head (m)
	Watt	Hp							
ARFS 25- 12 - 220Volt	750	1	2900	32	25	X	2	4,5	12
ARFS 25 12 - 380Volt	750	1	2900	32	25	X	2	4.5	12
ARFS25 - 11 (Z) - 220Volt	750	1	2900	32	25	V	2	4.5	11
ARFS 25 - 11 (Z) - 380 Volt	750	1	2900	32	25	V	2	4.5	11
ARFS 40 - 20 - 220Volt	1500	2	2900	50	40	X	2	8.5	20
ARFS 40 - 20 - 380Volt	1500	2	2900	50	40	X	2	8.5	20
ARFS 40 - 20 (Z) - 220Volt	1500	2	2900	50	40	V	2	8.5	20
ARFS 40 - 20 (Z) - 380Volt	1500	2	2900	50	40	V	2	8.5	20