

TS 30 - 60 Watt SS

LED Street Light




Our LED streetlight TS SS (Smart System) bundled with SELC external CMS luminaire module with embedded Itron communications provides reliable, secure, two-way control and monitoring LED streetlight. Luminaire life can be easily be extended with the dimming scheduling, power ON/OFF, energy metering, failure reporting, location coordinates, etc.

Applications :

Collector Roads, Locally Roads, Environment Roads, Residential Areas, Parking Areas, Parks, Walkways, Pedestrian.



Dimensions:

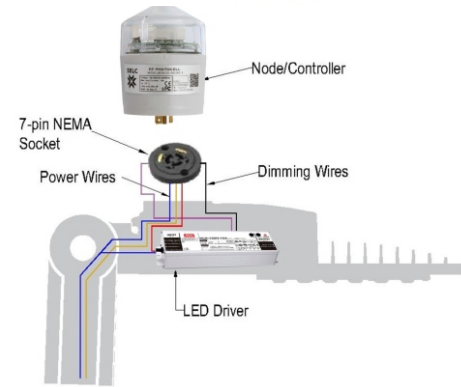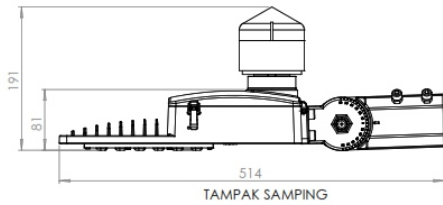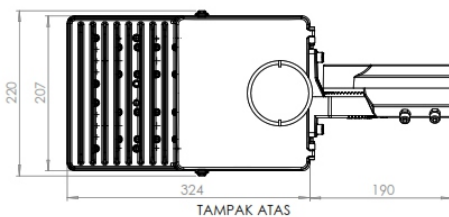


Specifications are in minimum value and subject to change without prior notice.

LUMINAIRE SPECIFICATIONS

Model	SL-0202M SS			
Rated Power (±10%)	30W	40W	50W	60W
Rated Flux	5600	6500	7800	9400
Input Voltage	100~240 VAC			
Frequency	50 – 60Hz			
Correlated Color Temperature (CCT)	5000K (3000K/4000K/5700K/6500K available upon request)			
Estimated Lifetime	50.000 hours (under normal environment)			
Color Rendering Index (CRI)	>72			
LED Type	Lumileds Luxeon 5050			
Light Distribution/Beam Angle	Wide beam			
Case Temperature (Tc)	< 65°C			
Operating Temperature	-20°C ~ 55°C			
Working Humidity	10% ~ 90% RH			
Ingress Protection Rating	IP 66			
THD	< 16%			
Power Factor	> 0.96			
Receptacle	NEMA ANSI C136.41, 7-pins			
Surge Protection	10 kV			
Materials	Body: Aluminium Die Cast >4mm Ev. Thickness Cover: PMMA with UV Protection Hardware: Stainless Steel			
Dimensions mm (W x H x L)	509 x 207 x 85			
Pipe Installation Standard	2" with Adjustable Adaptor 0° - 90°			
Weight (kg)	Approx. 4.1			

Operations

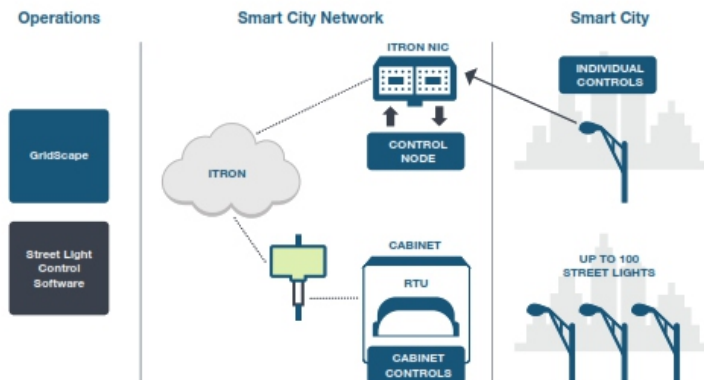

Office & Workshop :
PT SOLARENS LEDINDO
Komplek De Primaterra B2-3B
Jalan Sapan - Gedebage, Bandung 40297 - Indonesia
Tel. +6222-87301403 | Fax. +6222-87528436 | Email : sales2@solarens.com