


Characteristics (under normal operating condition at ambient temp. +35 °C)

Model	40ACU-P23	
Capacity (W)	1200	
Installation type	panel	
Input	single-phase (V.)	220V+20% / -15%
	frequency (Hz.)	50/60
	current (A.)	3.6
Compressor	hermetic type	rotary
	refrigerant type	r134a
System operate	direct expand	yes
Hi-prosent ctrl1.	thermostat	yes
	condensor thermal detector	yes
	anti-freeze detector	yes
	compressor overheat detector	none
	water detector	none
Protection	over drain protection system	yes
Display	thermometer (red 7 segment 19 mm.)	yes
	system status (2 colour LED)	yes
Electrical equip.	safety device	7A. slow-blow fuse
Evaporator coil	face area x rows	47.5 sq.inch x 3
	servo fan (r.p.m.)	2850
	number of fan x cfm (0.2 inH ₂ O)	2 x 158
Condenser coil	face area x rows	83.5 sq.inch x 6
	centrifugal fan (r.p.m.)	2500
	number of centrifugal fan x cfm	1 x 647.5
Physical data	gross weight (kgs.)	46.60
	dimension (mm)	W:350 D:146 H:1350
	condensate drain	OD. 1/2 inch
	internal casing	electro-galvanize
Air filter	width x lenth (mm)	200 x 250



DIMENSION in mm.

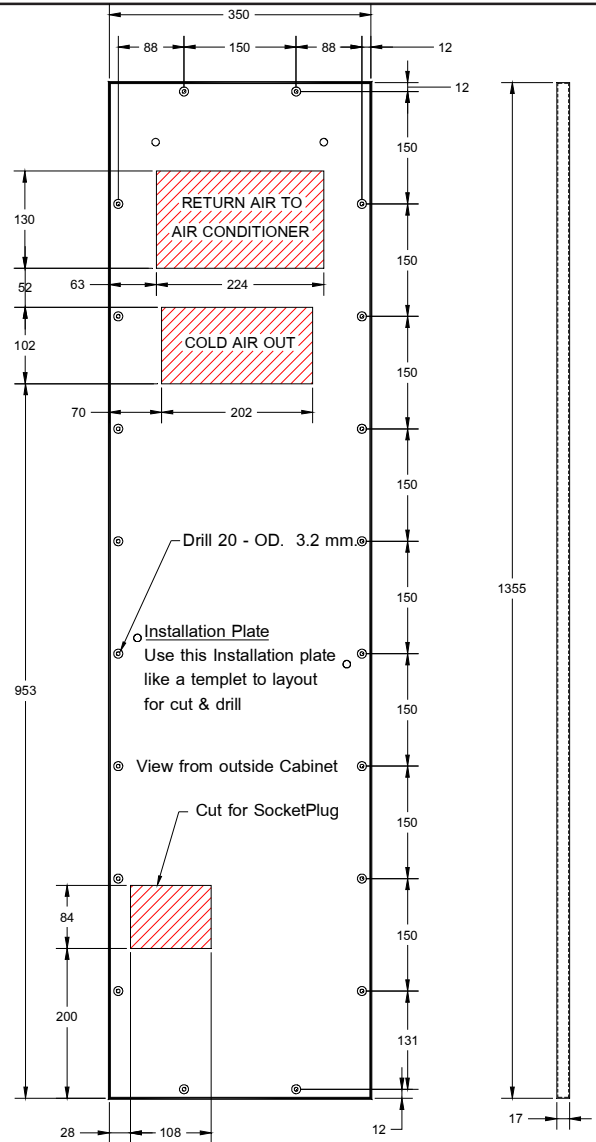