


Technical Specification

ITEM		UNITS	SPECIFICATION						REMARKS
MODEL			FR-350	FR-650	FR-1000	FR-1500	FR-2000	FR-3000	
CAPACITY		VA	350	650	1000	1500	2000	3000	MAXIMUM
AC INPUT	VOLTAGE	V	170 ~250						
	FREQUENCY	Hz	50						
	PROTECTION		FUSE			MCB			
AC OUTPUT	VOLTAGE	V	220 ± 2%						NOMINAL LOAD
	FREQUENCY	Hz	50						
RESPONSE TIME		s	0,02						
TRANSFORMATOR SYSTEM			SEPARATION TRANSFORMER						
DIMENSION		mm	320x230x180	353x265x220	320x230x275	473x230x290	473x230x290	480x230x467	D x W x H
WEIGHT		Kg	11	22	35	44	52.5	73	GROSS

ITEM		UNITS	SPECIFICATION				REMARKS
MODEL			FR-5000	FR-7501C1	FR-1002C1	FR-1502C1	
				FR-7501C3	FR-1002C3	FR-1502C3	
CAPACITY		VA	5000	7500	10000	15000	MAXIMUM
AC INPUT	VOLTAGE	V	170 - 250	SINGLE PHASE, 3 WIRE 220			170 ~250
				THREE PHASE, 4 WIRE 380			+ 10%, -20%
	FREQUENCY	Hz	50				
PROTECTION			MCB				
AC OUTPUT	VOLTAGE	V	220 ± 2%	220 ± 5%			NOMINAL LOAD
				380 ± 5%			
FREQUENCY		Hz	50				
RESPONSE TIME		s	0.02				
TRANSFORMATOR SYSTEM			SEPARATION TRANSFORMER				
DIMENSION		mm	480x230x467	630x264x682	490x530x1140	490x530x1140	D x W x H
WEIGHT		Kg	88.5	157	224	293	GROSS
				171	266	293	

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

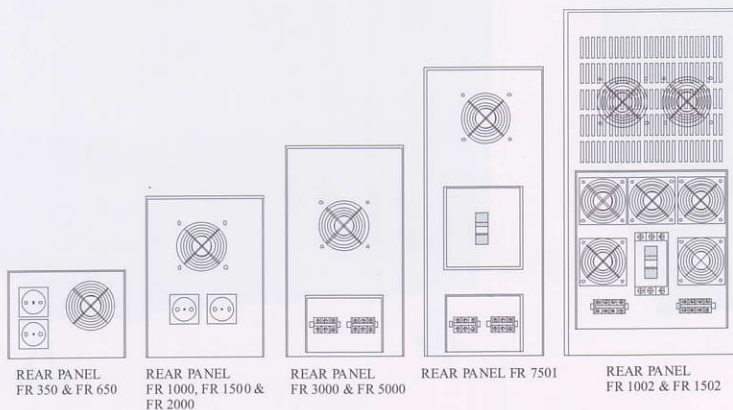

CONTACT PERSON :

481-4210010-112