

Features

- 1-channel
- DIN rail mount module
- For 30 V IS or Non-IS applications
- Protects field or control circuit inputs
- Max. surge current (8/20) 20 kA
- Uninterruptable operation (auto reset)

Function


This Surge Protection Barrier limits induced transients of different origin (e. g. lightning stroke, switching impulse, etc.). This is achieved by diverting the transient current to ground and limiting the signal line voltage to a safe level for the duration of the surge.

This barrier provides a low line-to-line and line-to-ground clamping voltage for the protected instrument. It also protects instruments that have less than 500 V isolation-to-ground, such as Zener Barriers, standard I/O cards, and some field instruments.

For additional information, refer to the manual and www.pepperl-fuchs.com.


Note: Surge Protection Barriers must always be connected to a solid and effective ground and be at the same equipotential level as the instrument it is protecting. The ground system must comply with all applicable regulations.

Assembly

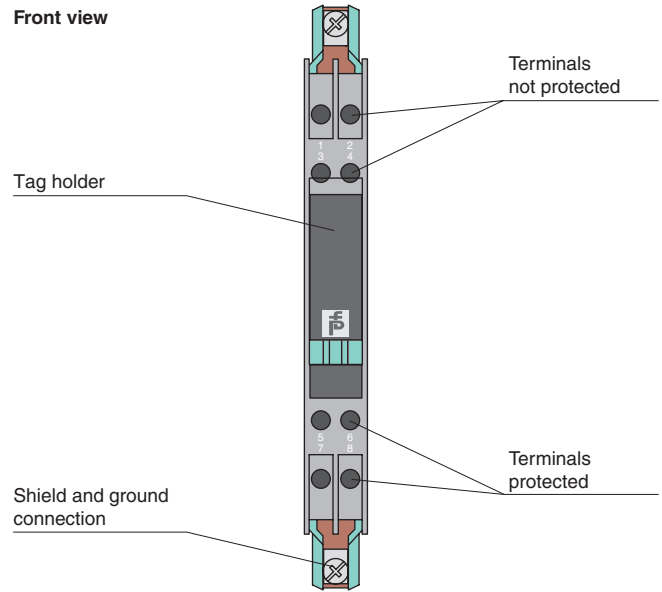


CE

Connection

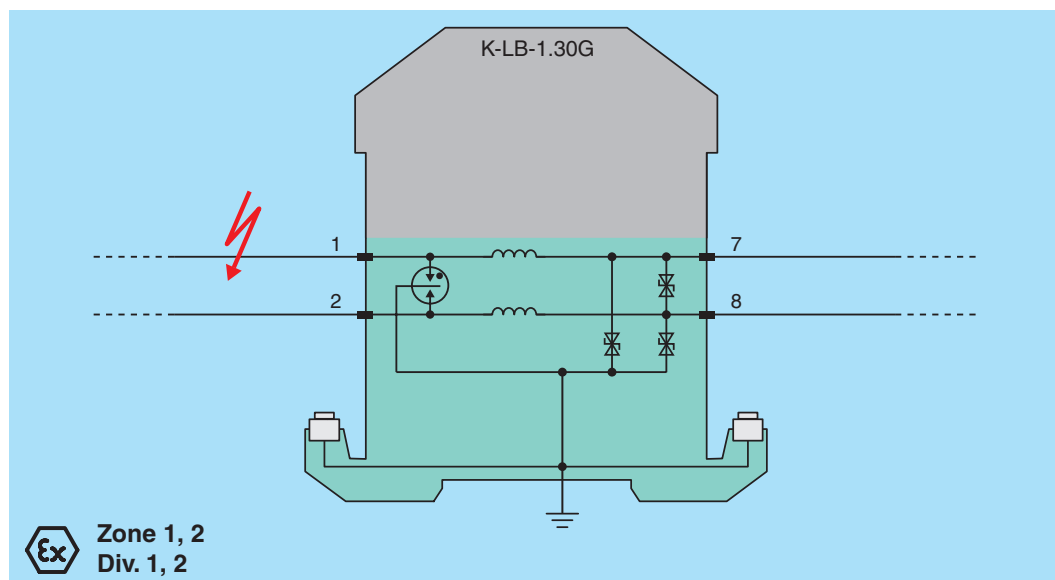


Supply		
Connection		protected area: terminals 7, 8 unprotected area: terminals 1, 2
Rated voltage	U_n	$\leq 30\text{ V}$
Rated current	I_n	$\leq 250\text{ mA}$
Leakage current		$\leq 5\text{ }\mu\text{A}$
On-state voltage		$\leq 45\text{ V}$
Electrical specifications		
Nominal discharge current (8/20) I_n		10 kA per core, 5 kA per core (10x)
Max. surge current (8/20) I_{max}		20 kA per core, 10 kA per core (1x)
Conformity		
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		-30 ... 80 °C (-22 ... 176 °F) for Ex application, please observe EC-Type Examination Certificate
Mechanical specifications		
Degree of protection		IP20
Mass		approx. 100 g
Dimensions		12.5 x 114 x 110 mm (0.5 x 4.5 x 4.3 in)
Data for application in connection with Ex-areas		
EC-Type Examination Certificate		PTB 00 ATEX 2176X , for additional certificates see www.pepperl-fuchs.com
Group, category, type of protection, temperature class		Ex II 2(1)G Ex ia IIC T6
Temperature class		T6 for ambient temperature $\leq 50\text{ }^\circ\text{C}$ T5 for ambient temperature $\leq 70\text{ }^\circ\text{C}$ T4 for ambient temperature $\leq 80\text{ }^\circ\text{C}$
Voltage	U_i	30 V
Current	I_i	250 mA
Nominal response time		
Symmetrical		1 ns
Asymmetric		100 ns
Series resistance		$\leq 0.3\text{ }\Omega$ per conductor
Bandwidth		$\geq 40\text{ kHz}$
Directive conformity		
Directive 94/9/EC		EN 60079-0:2012+A11:2013 , EN 60079-11:2012
International approvals		
CSA approval		
Control drawing		116-0187 (cCSAus)
IECEx approval		IECEx BAS 14.0010X
General information		
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .


Topology

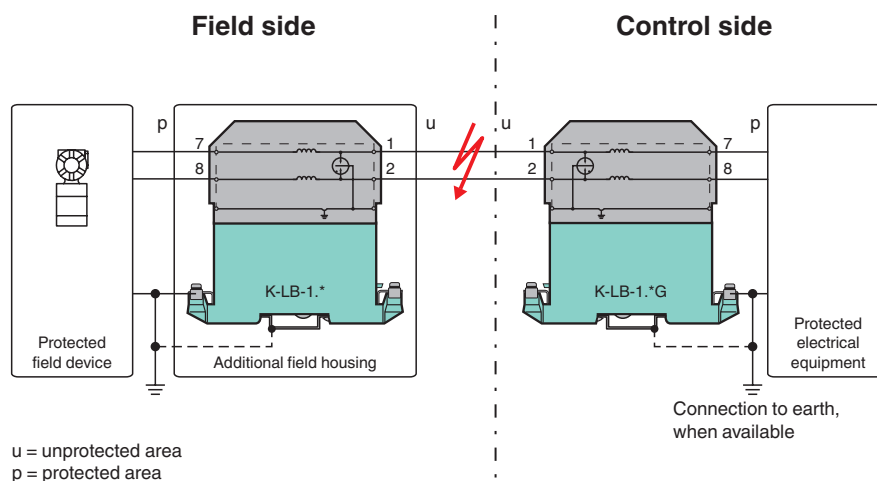

Installation examples

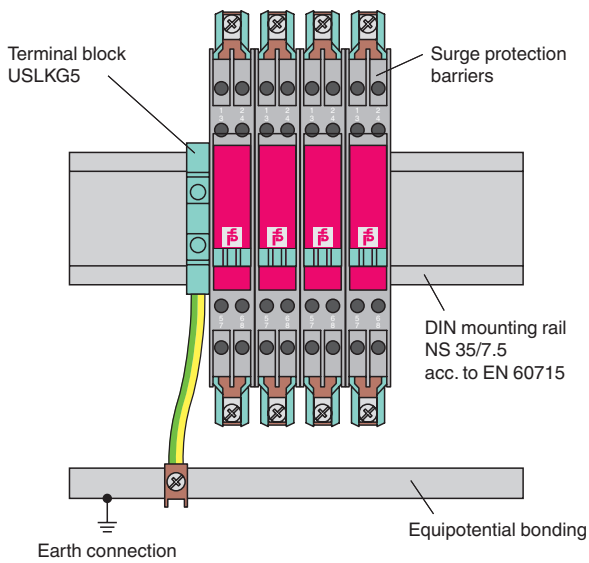

Insulated mounting (group grounding)

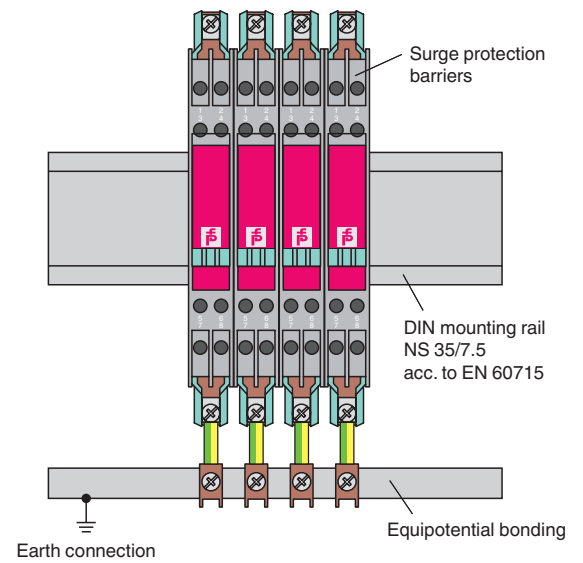

Insulated mounting (individual grounding)