



# Bobcat®

## SKID-STEER LOADER S570

Operating Weight	2900 kg
Engine Power	45.5 kW
Rated Operating Capacity	944 kg



***One Tough Animal®***

# S570 - SPECIFICATIONS

## Performance

Tipping load (ISO 14397-1)	1888 kg
Rated operating capacity (ISO 14397-1)	944 kg
Pump capacity	64.7 L/min
Pump capacity (with high flow-option)	101.1 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (high range-option)	17.3 km/h
Max. travel speed (low range)	11.8 km/h

## Engine

Make/Model	Kubota/V2607 (IT4)
Fuel	Diesel
Cooling	Liquid
Power at 2700 RPM (SAE J1995 Gross)	45.5 kW (61.0 HP)
Torque at 1425 RPM (SAE J1995 Gross)	200.7 Nm
Number of cylinders	4
Displacement	2600 cm <sup>3</sup>
Fuel tank	93.7 L

## Weights

Operating weight	2900 kg
Shipping weight without bucket	2560 kg

## Controls

Vehicle steering	Direction and speed controlled by two hand levers or Selectable Joystick Controls (SJC)
Loader hydraulics tilt and lift	Foot pedals or optional Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

## Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

## Standard Features


10x16.5, 10-ply, Heavy duty tyres	Manual
Cushioned lift and tilt cylinders	Lift arm support
Bobcat Interlock Control System (BICS)	Parking brake
Bob-Tach™ frame	Seat bar
Operator cab¹	Turbo-charger with approved spark arrestor
Electrically activated proportional front auxiliary hydraulics	Work lights, front and rear
Engine/hydraulics system shutdown	Back-up alarm
Standard seat	

1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) – meets requirements of SAE-J1043 and ISO 3449, Level I

## Options

Deluxe operator cab with windows	Strobe
Selectable Joystick Controls (SJC)	Radio
2 speed	Road kit
Deluxe instrument panel	10x16.5, 10-ply, Heavy duty tyres, offset rims
Deluxe pressurized cab with heating	10x16.5, 10-ply, Severe duty tyres
Deluxe pressurized cab with HVAC	10x16.5, Solid flex tyres
High-flow hydraulics	31x12-16.5, 10-ply, Super flotation tyres
Power Bob-Tach™	Hydraulic bucket positioning (including ON/OFF switch)
Beacon	High-back adjustable suspension seat

## Dimensions

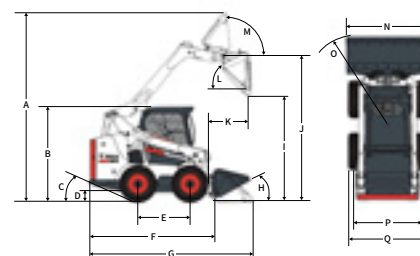

(A)	3901.0 mm	(J)	3023.0 mm
(B)	1972.0 mm	(K)	828.0 mm
(C)	24.2°	(L)	42.0°
(D)	185.0 mm	(M)	97.0°
(E)	1082.0 mm	(N)	1727.0 mm
(F)	2657.0 mm	(O)	2024.0 mm
(G)	3378.0 mm	(P)	1374.0 mm
(H)	30.0°	(Q)	1643.0 mm
(I)	2319.0 mm		

## Attachments

Angle broom	Pallet fork
Auger	Planer
Backhoe	Rock bucket
Bale fork	Scarifier
Blades — box, dozer, snow, snow v-blade	Scraper
Breaker, hydraulic	Seeder
Brush saw	Snow pusher
Brushcat™ rotary cutter	Snowblower
Bucket adapter	Sod layer
Buckets	Soil conditioner
Chipper	Spreader
Combination bucket	Stabilizer, rear
Concrete mixer	Steel tracks
Concrete pump	Stump grinder
Digger	Sweeper
Drop hammer	Three-point hitch adapter
Dumping hopper	Tiller
Flail cutter	Tilt-Tatch™
Grader	Tree spade
Grapples — farm / utility, industrial, root	Trench compactor
Landplane	Trencher
Landscape rake	Utility fork
Laser equipment	Utility frame
Mower	Vibratory roller
Packer wheel	Water kit
	Wheel saw
	Whisker broom

**DOOSAN**

Bobcat is a Doosan company.  
Doosan is a global leader in construction equipment, power and water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries.  
©2020 Bobcat Company. All rights reserved.

# multico

## Asia's Equipment Specialist

Multico Equipment Indonesia, PT.

Plaza Kelapa Gading Blok C No. 12 Jl.Raya Boulevard Barat,

Kelapa Gading, Jakarta Utara, 14240

Phone: +62 21 4585 1122 / Fax : +62 21 2245 5028

www.multicoequipmentid.com

**SCAN HERE**



# Bobcat®