




### FEATURES

- ✓ **Standard ISO** : 5752, BS 5155, MSS SP 67 & API 609
- ✓ **Pressure Range** : Maximum working pressure of 16 bar
- ✓ **Flange Connection** : JIS 5K/10K/16K, ANSI 150#, PN 10/16 & Table D/E
- ✓ **Test Inspection** : API 598
- ✓ **Material Selections** :
  - Body : Cast Iron/Ductile Iron/Carbon Steel/ Stainless Steel/Bronze
  - Disc : Stainless Steel/Aluminium Bronze/Coated
  - Stem : Stainless Steel/ K-Monel
  - Seat : EPDM/NBR/Viton/Silicon/Neoprene

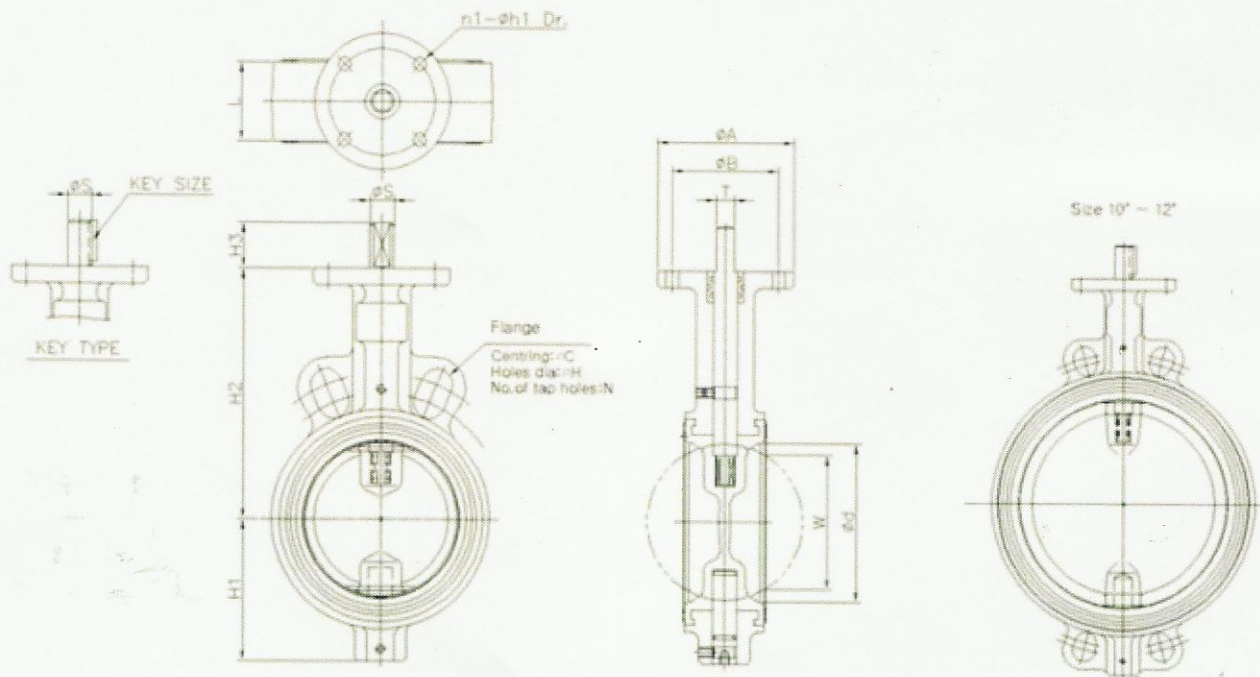

### DIMENSIONS

SIZE		$\phi d$	L	H1	H2	H3	W	STEM		TOP FLANGE			KEY SIZE	WEIGHT (kg)
Inch	mm							$\phi S$	T	$\phi A$	$\phi B$	$n1-\phi h1$		
2"	50	50	43	61	128	33	28	14	9.8	90	70	4 - 10	5 x 5	3.2
2.5"	65	67	46	73	139	33	51	14	9.8	90	70	4 - 10	5 x 5	4.1
3"	80	79	46	80	150	33	67	14	9.8	90	70	4 - 10	5 x 5	4.5
4"	100	101	52	93	164	33	89	16	11.8	90	70	4 - 10	5 x 5	5.8
5"	125	124	56	113	176	33	113	18	12.8	90	70	4 - 10	6 x 6	7.8
6"	150	147	56	126	190	33	139	18	12.8	90	70	4 - 10	6 x 6	9.5
8"	200	197	60	157	230	40	191	22	-	125	102	4 - 12	8 x 7	17.0
10"	250	248	68	205	270	40	242	22	-	125	102	4 - 12	8 x 7	24.0
12"	300	297	78	240	305	40	290	28	-	125	102	4 - 12	8 x 7	40.0
14"	350	332	78	267	335	50	327	32	-	150	125	4 - 15	10 x 8	55
16"	400	376	102	303	370	60	366	38	-	175	140	4 - 18	12 x 8	84
18"	450	430	114	325	390	60	419	38	-	175	140	4 - 18	12 x 8	97
20"	500	488	127	360	430	75	475	45	-	210	165	4 - 22	14 x 9	142
24"	600	568	154	445	495	80	551	55	-	210	165	4 - 22	16 x 10	195