



PJU - TS NIG Lite ALL IN ONE

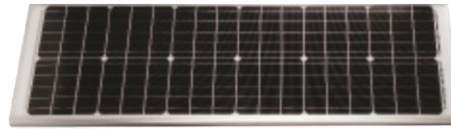





Mono panel



Pole install



Switch

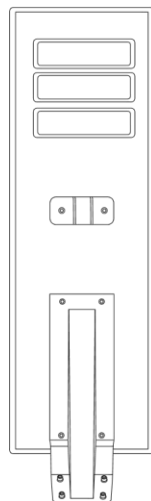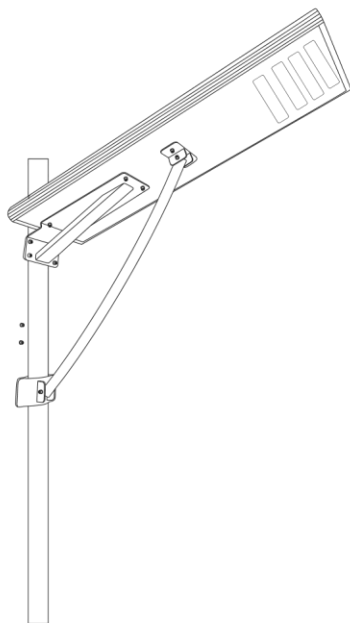

ATTENTION FOR THE USE OF THE FIRST TIME

When you get the solar light , the battery is only 50%-60% full charge because of shipping. So we open the switch place the solar light in a location where it can receive a full 6-8 hours of sun power to recharging the battery to reach maximum capacity and then to install the solar light where you want


NIG Lite ALL IN ONE 60W

SEPESIFICATION



LED Power	: 60w
LED Chip	: Philips
Lumens	: 150lm/w
Viewing Angle	: 120 degree
CCT	: 6000K
Lifespan	: 50000 hours
Solar Panel	: High Efficiency Monocrystalline
Max Power	: 70W
Life Time	: 25 Years
Battery Type	: LifePo4
Capacity	: 36AH
Life Time	: 5-8 Years
Charger Time by Sun	: 8 Hours
Full Power Mode	: 12 Hours
Working Temperature	: 30-60 degree
System	: Dimmer
Mounting Height	: 5-7 meters
Space Between Light	: 15-25 meters
Main Material	: Aluminum Alloy
Waterproof	: IP65
Gross Weight	: 10.5 kg
Box Size	: 102*41*18 cm

Mono panel



Pole install



Switch




NIG Lite ALL IN ONE 80W

SEPEIFICATION



LED Power	: 80w
LED Chip	: Philips
Lumens	: 150lm/w
Viewing Angle	: 120 degree
CCT	: 6000K
Lifespan	: 50000 hours
Solar Panel	: High Efficiency Monocrystalline
Max Power	: 90W
Life Time	: 25 Years
Battery Type	: LifePo4
Capacity	: 46AH
Life Time	: 5-8 Years
Charger Time by Sun	: 8 Hours
Full Power Mode	: 12 Hours
Working Temperature	: 30-60 degree
System	: Dimmer
Mounting Height	: 6-8 meters
Space Between Light	: 15-25 meters
Main Material	: Aluminum Alloy
Waterproof	: IP65
Gross Weight	: 14 kg
Box Size	: 114*41*18 cm

Mono panel



Pole install



Switch



NIG Lite ALL IN ONE 100W

SEPESIFICATION



LED Power	: 100w
LED Chip	: Philips
Lumens	: 150lm/w
Viewing Angle	: 120 degree
CCT	: 6000K
Lifespan	: 50000 hours
Solar Panel	: High Efficiency Monocrystalline
Max Power	: 120W
Life Time	: 25 Years
Battery Type	: LifePo4
Capacity	: 60AH
Life Time	: 5-8 Years
Charger Time by Sun	: 8 Hours
Full Power Mode	: 12 Hours
Working Temperature	: 30-60 degree
System	: Dimmer
Mounting Height	: 8-9 meters
Space Between Light	: 15-25 meters
Main Material	: Aluminum Alloy
Waterproof	: IP65
Gross Weight	: 21.3 kg
Box Size	: 136*41*18 cm


Mono panel





Pole install



Switch



CONTOH PEMASANGAN

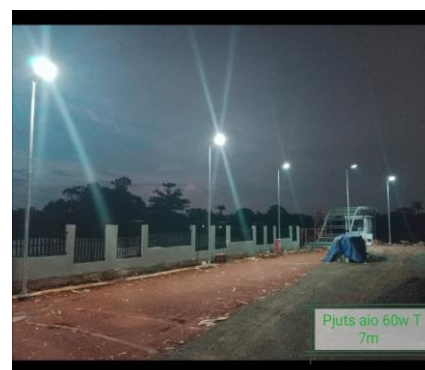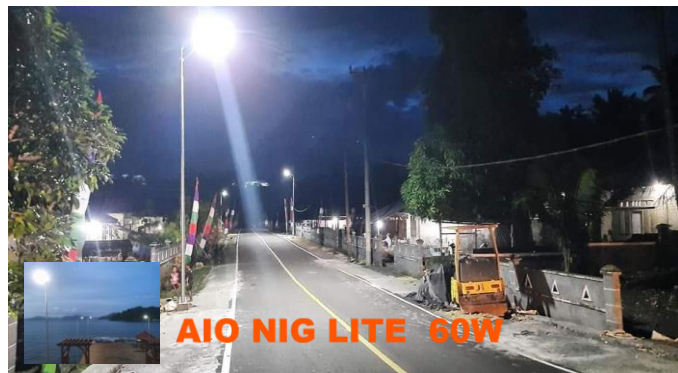

CONTOH PEMASANGAN

