

Technical sheet :


# **2600 R**

---



Capacities		Metric
Rated Operating Capacity		1179 kg
Rated Operating Capacity with Optional Counterweight		1261 kg
Weight and dimensions		
Overall Operating Height - Fully Raised	h27	4089 mm
Height to Hinge Pin - Fully Raised	h28	3124 mm
Overall Height to Top of Rops	h17	2057 mm
Dump angle at full height	a5	40 °
Dump height	h29	2488 mm
Overall length with bucket	l16	3632 mm
Dump reach at full height		686 mm
Rollback at ground		28 °
Seat to ground height	h30	1016 mm
Wheelbase	y	1257 mm
Overall width less bucket	b1	1664 mm
Bucket Width	e1	203 mm
Ground clearance center	m4	203 mm
Overall length - Less Bucket	l2	2832 mm
Departure angle	a2	25 °
Clearance Circle - Rear	wa1	1626 mm
Operating Weight - Approximate		3719 kg
Performances		
Travel speed (unladen)		12.9 km/h
Travel Speed with Two-Speed Option - Maximum		19.2 km/h
Wheels		
Standard tyres		12.00x16.5 HD
Engine		
Engine brand		Yanmar
Engine model		4TNV98CT-NMS
Gross Power (kW)		53.7 kW
Net Power (kW)		52.7 kW
Max. torque / Engine rotation		294 Nm / 2500 tr/min
Battery		12 V
Starter (kW)		3 kW
Hydraulics		
Auxiliary hydraulics		90.1 l/min
Auxiliary Hydraulic Pressure		228 Bar
High-Flow Auxiliary Hydraulics - Option (L/min)		132.5 l/min
High-Flow Auxiliary Hydraulics Pressure - Option		221 Bar
Tank capacities		
Fuel tank		81.4 l
Reservoir Capacity Hydraulics		30.3 l
Displacement		3.3 l
Noise and vibration		
Environmental noise (LwA)		101 dB(A)
Noise at driving position (LpA)		85 dB(A)
Whole-Body Vibration (ISO 2631-1)		<0.96 m/s <sup>2</sup>
Vibration to whole hand/arm		<1.50 m/s <sup>2</sup>


## Dimensional drawing

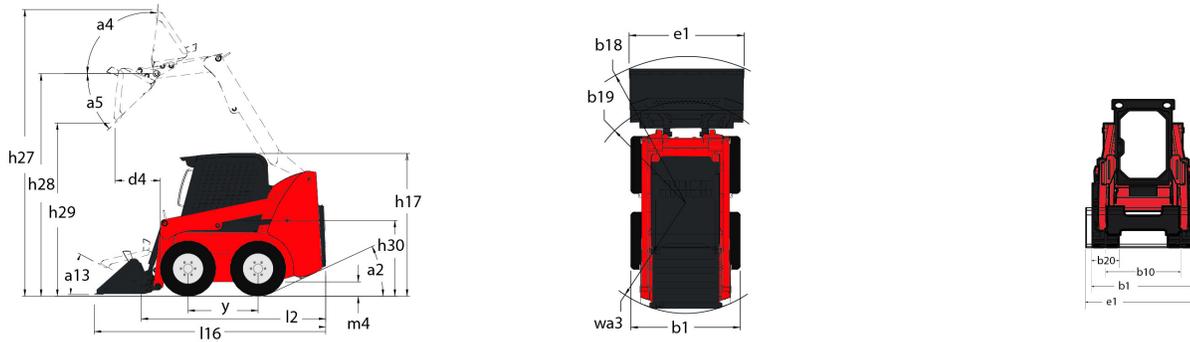

## Equipment

<b>Comfort</b>	
Air conditioning with manual adjustment	Optional
Air suspension seat	Optional
Joystick Controls	Optional
Suspension Seat - Mechanical	Optional
<b>Electrical System</b>	
Back-Up Alarm	Standard
Counterweight	Optional
<b>Electricity / Safety</b>	
High-Flow Auxiliary Hydraulics	Optional
<b>Engine</b>	
Dual-Hand Controls	Optional
Gehl T-Bar Controls	Optional
Hand/Foot Controls	Optional
<b>Hydraulics</b>	
Auxiliary Hydraulics	Standard
<b>Operators Station</b>	
Engine Auto-Shutdown System	Standard
Engine Block Heater	Optional
ROPS/FOPS Level II Overhead Guard	Standard
Turbo-Charged Engine	Standard
Work Lights - Front and Rear	Standard
<b>Performance</b>	
Adjustable Arm Rests / Control Towers 1	Standard
Cab Enclosure	Optional
Foot and Hand Throttles 2	Standard
Full Instrumentation	Standard
Heating	Optional
High-Back Adjustable Seat	Standard
Horn	Standard
Integral Access Plate (removable)	Standard
Operator Restraint Bar	Standard
Sound Reduction Material	Standard
Two-Speed Drive	Optional
<b>Structure</b>	
All-Tach® Attachment Mounting System	Standard
Brake Control (Auto / Manual)	Standard

Structure	
Hydraglide™ Ride Control 3	Optional
Hydraloc™ Safety System	Standard
Hydrostatic Drive - Servo	Standard
Lift Arm Support Device	Standard
Power-A-Tach® Attachment Mounting System	Optional
Selectable Self-Leveling Hydraulic Lift Action 4	Optional

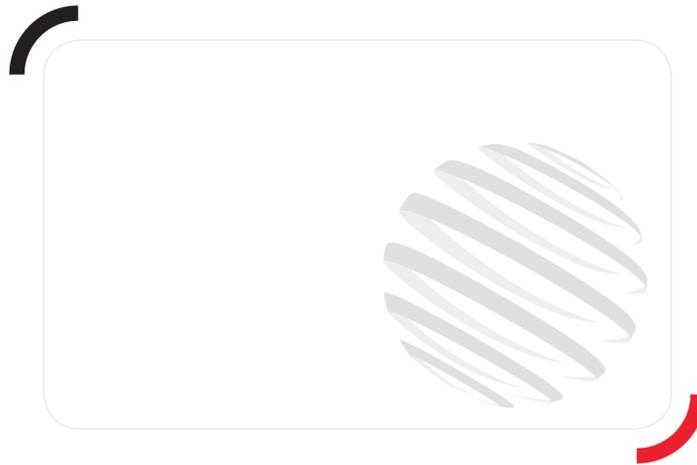

Siège Social  
430 rue de l'Aubinière - 44150 Ancenis Cedex - France  
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508  
RCS Nantes