


## KX-CDD-H15/H20/H25

### Electric Stacker

These series have two kinds of cylinder system. One is economic single oil cylinder; the other one is double oil cylinders with steering motor. The fork size and lifting height can be customized. Stand full electric stacker, with movable pedal, it can reduce the operator's work intensity. Handle accord with human body engineering design, compact and steady. All operation can be done through handle. Durable large capacity traction battery, convenient and rapid charging. Superpower driving and lifting dc motor, it has good performance of speed regulation, realize larger starting and braking torque function.



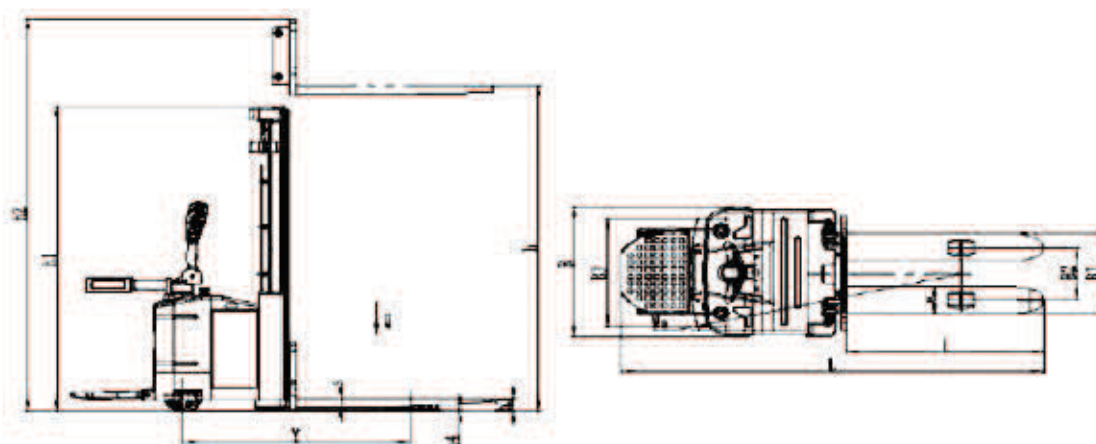

## Main technical data

Articles / model	Unit	KX-CDD-H15	KX-CDD-H20	KX-CDD-H25
Rated load	kg	1500	2000	2500
Lifting height	mm	3500/4000/4500/5000/5500		
Max. mast height	mm	4000/4500/5000/5500/6000		
Fork length	mm	1150		
Fork width	mm	550/685		
Overall length	mm	2150 - 2480		
Overall width	mm	850/940/940/940/940		
Overall height	mm	2260/2070/2070/2200/2330		
Turning radius	mm	1588		
Carrying wheel	mm	Φ85x80		
Driving wheel	mm	Φ210x70	Φ250x75	
Wheel base	mm	1345		
Lifting speed full-load	mm/s	45	100	
Driving speed full-load	Km/h	3.5		
Climbing gradient	°	4.5	5	
Driving motor	Kw	0.75	2.2	
Lifting motor	Kw	2.2	3.0	
Battery	V/Ah	24/210		
N.W./G.W.	kg	1047 1110 1127 1134	1074 1129 1146 1154	1097 1149 1166 1190