

## Options:

Heavy duty C-shaped steel construction for strength and rigidity.

Fork length: 1150mm

Fixed fork width: 540mm(European style)


- ◆ Robust steel profile construction.
- ◆ Sturdy and compact enough to fit through standard door and to operate in congested areas.
- ◆ Lifting function operated by foot and hand controls,
- ◆ Allow the operator to work without having to perform extreme body movements.



Easy and comfortable handling through ergonomically handles,effortless pulling during transport with long tiller.



Ergonomic rubber handle ensures a comfortable easy operation.

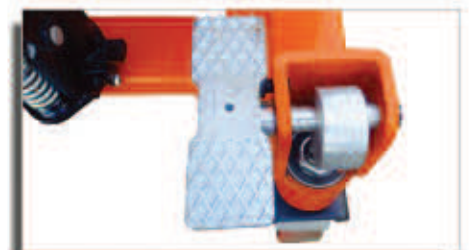


Effortless and quick lifting for using foot pedal without loads .




## What type of stacker do I need ?

### Open pallet (without bottom boards) →



There are 2 type , The first types has forks that wrap over the legs of the stacker .Both the forks and legs are inserted under the pallet . Wrapover stackers can only be used with open pallets .

### Closed pallet (with bottom boards) →



The second type have straddle legs that fit around the pallet , The forks are positioned between the legs ( the fork width is usually adjustable) this type of stacker can be used with both open and closed pallets .

## HAND STACKER CTY-E

Model	CTY-E1.0	CTY-E1.5	CTY-E2.0
Rated lifting capacity(kg)	1000	1500	2000
Max lifting height (mm)	1600	1600	1600
Lowered height of forks (mm)	90	90	90
Fork length (mm)	900	900	900
Adjustable width of forks(mm)	320-750	340-750	340-750
Lifting speed(mm/stroke)	20	18	14
Lowering speed(mm/stroke)	Controllable	Controllable	Controllable
Operation power of hand crank(kg)	24	28	32
Outer width of front legs (mm)	690	690	690
Min. refuel volume for fuel tank(L)	1.6	1.8	2.0
Front wheel size(mm)	φ 74x52	φ 74x70	φ 74x70
Rear wheel size(mm)	φ 180x50	φ 180x50	φ 180x50
Overall size(mm)	1390x780x2040	1390x780x2040	1390x780x2040
Self weight(kg)	200	235	240