


SQB 快速接頭

- 流量大、耐高壓。
- 各型號均附防塵蓋。


Hydraulic Couplers

※High flow rate and high pressure resistance.
 ※Dust cap include on all models.


SQB Series 最大使用壓力
 Maximum Operating Pressure
700 bar




SQB-1/4T




SQB-3/8J



SQB-3/8T

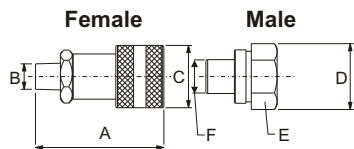


SQB-3/8U

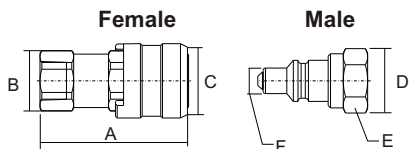


SQB-37

整組型號 Model Number	母接頭型號 Female Model	公接頭型號 Male Model	外型尺寸 Dimension(mm)					
			A	B	C	D	E	F
SQB-1/4T	SQB-1/4TF	SQB-1/4TM	58.5	1/4"-18NPT	28.6	30.0	26.0	φ 10.0
SQB-3/8J	SQB-3/8JF	SQB-3/8JM	59.0	3/8"-19PT	30.5	28.0	24.0	φ 12.7(1/2")
SQB-3/8T	SQB-3/8TF	SQB-3/8TM	58.5	3/8"-18NPT/PT	28.5	33.0	28.0	φ 12.0
SQB-3/8U	SQB-3/8UF	SQB-3/8UM	72.0	3/8"-18NPTF/PT	35.0	37.0	32.0	φ 19.05(3/4")
SQB-37	SQB-371F	SQB-372M	64.0	3/8"-18NPTF/PT	32.0	28.5	24H	φ 11.25(7/16")

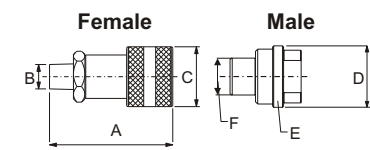


SQB-1/4H

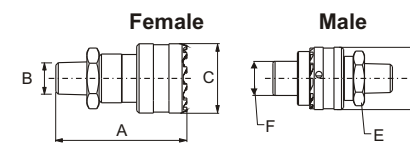

SQB-1/4HG

防塵蓋
 Dust cap

鋁合金防塵蓋
 Aluminum Dust cap.

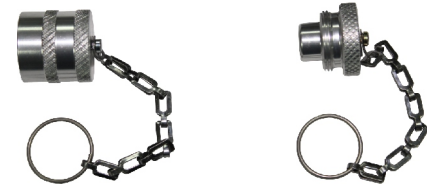

SQB-1/4HM-1

SQB-1/4HF-1

Model No.	Female Model	Dust Cap Model	Male Model	Dust Cap Model	外型尺寸 Dimension(mm)					
					A	B	C	D	E	F
整組型號	母接頭型號	防塵蓋型號	公接頭型號	防塵蓋型號	螺牙樣式					
SQB-1/4H	SQB-1/4HF	SQB-1/4HF-1	SQB-1/4HM	SQB-1/4HM-1	59.75	1/4"-18 NPTF	15.88	24.0	28.0	15.88
SQB-1/4HG	SQB-1/4HGF		SQB-1/4HGM	SQB-1/4HGM	54.85	1/4"-18 NPTF	28.20	28.4	22.0	15.88

XU 高壓油管

- 內管層：耐油性之合成橡膠配方。
- 外管層：耐油、耐磨、耐侯性之特殊橡膠配方。
- 適用溫度：-40°C~+93°C
- 長度加壓變化：-4%~+2%(在工作壓力下)
- 補強層：雙層鋼絲網。
- ◎ 使用溫度超過93°C時，會顯著降低夾合膠管的使用壽命。

High Pressure Hydraulic Hoses

※Tube : Oil resistan synthetic rubber.
 ※Cover : Oil, abrasion and weather aging resistant synthetic rubber.
 ※Temp.Range : -40°C~+93°C
 ※Max. change in length : -4%~+2%(under W.P.)
 ※Reinforcement : Two layers of steel wire braids.
 ◎ Operating temperature in excess of 93°C may materially reduce the service life of hose assembly.

油管型號選擇：How is a hydraulic hose model number is built up:

X	U	2	-	1	.	6	M	3	N	M	3	N	M	-	S
1	2	3	4	5											
1.管徑尺寸 2=1/4英寸(6.4公釐) 3=3/8英寸(9.5公釐)	1.Tube dimension 2=1/4in(6.4mm) 3=3/8in(9.5mm)	2.油管長度 1呎=0.3公尺 1公尺=3.3呎	2.Length 1ft=0.3meter 1meter=3.3ft	3.一端尺寸 3NM=3/8NPTF(公牙) 3PM=3/8PTF(公牙)	3.End one 3NM=3/8NPTF(Male) 3PM=3/8PTF(Male)	4.另一端尺寸 3NM=3/8NPTF(公牙) 3NF=3/8NPTF(母牙) 3PM=3/8PTF(公牙) 3PF=3/8PTF(母牙)	4.End two 3NM=3/8NPTF(Male) 3NF=3/8NPTF(Female) 3PM=3/8PTF(Male) 3PF=3/8PTF(Female)	5.是否外附彈簧 S=外繞彈簧	5.Spring circle S=Spring circle						



1/4"NPTF(Male)



1/4"NPTF(Female)



3/8"NPTF(Male)



3/8"NPTF(Female)

型號 Model Number	油管尺寸 (內徑) Tube dimension (I.D.) (in/mm)	兩端尺寸 Hose End Assemblies		長度 Length (m)	工作壓力 Work pressure (bar)	爆破壓力 Broken pressure (bar)	最小彎曲半徑 Min. B.R. (mm)	重量 Weight (kg/m)
		End one	End two					
XU2-1.6M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	1.6	700	1400	100	0.4
XU2-1.8M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	1.8	700	1400	100	0.4
XU2-2M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	2	700	1400	100	0.4
XU2-3M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	3	700	1400	100	0.4
XU2-4M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	4	700	1400	100	0.4
XU2-5M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	5	700	1400	100	0.4
XU2-6M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	6	700	1400	100	0.4
XU2-1.6M3NM3NF-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Female)	1.6	700	1400	100	0.4
XU2-2M3NM3NF-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Female)	2	700	1400	100	0.4
XU2-3M3NM3PF-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"PTF(Female)	3	700	1400	100	0.4
XU2-1.8M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	1.8	700	1400	100	0.4
XU2-2M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	2	700	1400	100	0.4
XU2-2.5M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	2.5	700	1400	100	0.4
XU2-3M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	3	700	1400	100	0.4
XU2-5.5M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	5.5	700	1400	100	0.4
XU2-6M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	6	700	1400	100	0.4
XU2-1.8M3PM3PF-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Female)	1.8	700	1400	100	0.4
XU2-2M3PM3PF-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Female)	2	700	1400	100	0.4
XU2-3M3PM3PF-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Female)	3	700	1400	100	0.4
XU3-2M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	2	700	1400	100	0.4
XU3-3M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	3	700	1400	100	0.4
XU3-4M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	4	700	1400	100	0.4
XU3-5M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	5	700	1400	100	0.4
XU3-6M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	6	700	1260	127	0.67
XU3-2M3PM3PF-S	3/8 (9.5)	3/8"PTF(Male)	3/8"PTF(Male)	2	700	1260	127	0.67
XU3-3M3PM3PM-S	3/8 (9.5)	3/8"PTF(Male)	3/8"PTF(Male)	3	700	1260	127	0.67