
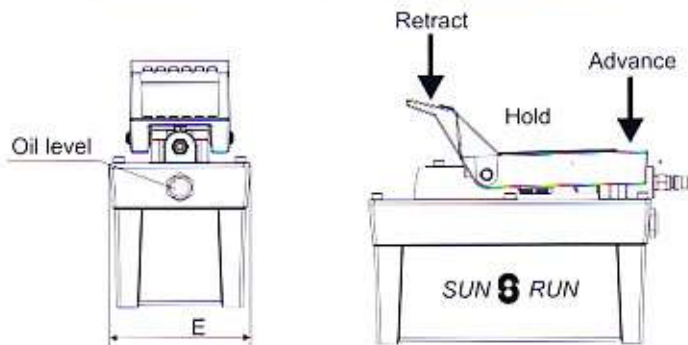
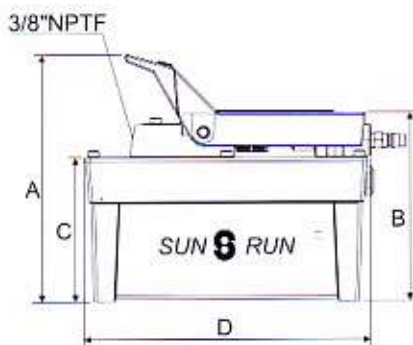
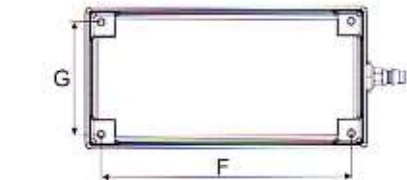


SPA-6 Air Hydraulic Pumps

- Internal relief valve protects circuit components, air inlet filter protects motor.
- High pressure output, light weight by Aluminum Alloy reservoir.
- Serviceable pump motor is not a "throw away", providing economical repair.
- Permanently vented reservoir cap.
- Three-position treadle provides cylinder advance, hold and retract operation.
- Equipped with air coupler, easy for using.
- dBA 85 at 700bar for all SPA-6 pumps, lower noise.

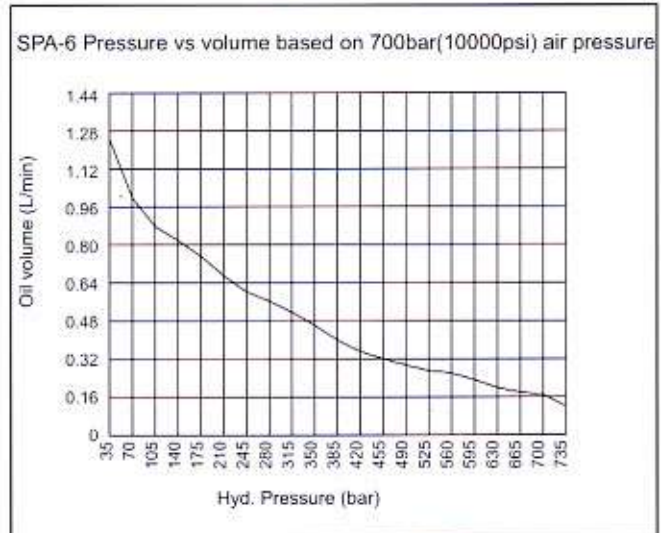

Model Number	Usable Oil Capacity (L)	Pressure Rating		Air Pressure Range (kgf/cm ²)	Output Flow Rate (noload) (L/min)		Dimensions (mm)						W.t (include oil) (kg)	
		(bar)	(psi)		0 bar	700bar	A	B	C	D	E	F		G
SPA-6	1.3	700	10,000	6-10	0.93	0.12	225	171	131	260	128	228	102	8.2