

SPH 鋼製手動泵浦

- 內含安全閥設計避免超壓引起損壞。
- 油箱容量大，適用範圍廣泛。
- 雙速操作、自動切換、省力有效率。
- 絕緣把手維護使用者安全。

Steel Hand Pump

- ※Internal pressure relief valve for overload protection.
- ※Large oil capacity, suitable for wide application.
- ※Two speed auto-switch reduces manpower and increase efficiency.
- ※Non-conductive fiberglass handle for operator safety.



其他選配說明

假如您需加裝4口方向閥來操作雙動油壓缸，請依下列規範字尾增加編號。

加裝4口方向閥：型號D

案例：

SPH-2000 選配4口方向閥，訂購型號改為 SPH-2000D
相關技術諮詢請與SUN RUN取得聯繫。

Optional Features

To add optional features to your pump, add the follow suffixes to the end of the model number.

4 ways control Valve：Model D

Example：

SPH-2000 with 4 ways control valve, order: SPH-2000D. Technical specifications for these features are available from SUN RUN.



SPH-400




SPH-900




SPH-1200



SPH-3000

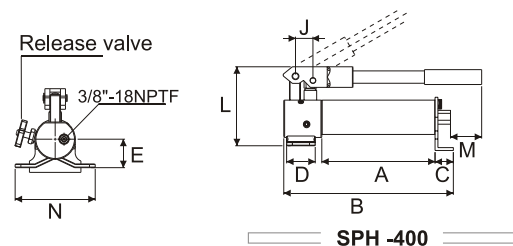


SPH-400

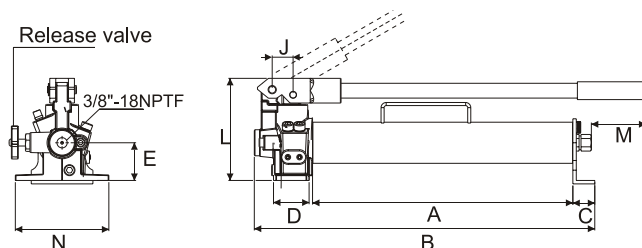


SPH-900

SPH-2000

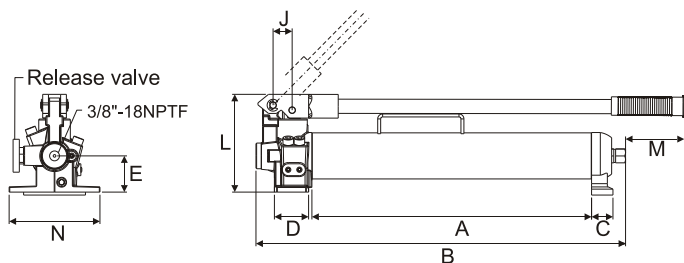

SPH-1200

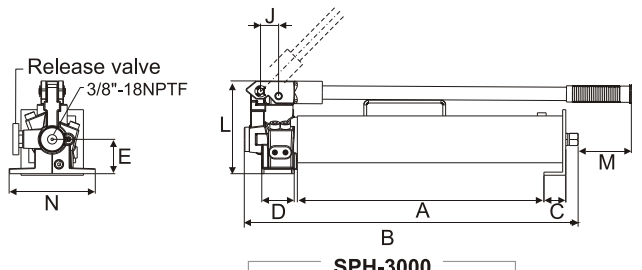

SPH-3000

Model Number	Pump Type	Usable Oil Capacity	Pressure Rating		Oil Displacement per Stroke		Piston Stroke	Dimensions(mm)									Weight (include oil)
型 號	泵浦類型	有效油量 (cm³)	輸出壓力		輸出油量		行程 (mm)	外型尺寸									重量 (含油) (kg)
			1 st stage	2 nd stage	1 st stage	2 nd stage		A	B	C	D	E	J	L	M	N	
			(bar)		(cm³)												
SPH-400	單速 S/S	400	—	700	—	1.25	22	200	296	32.0	50	50	29	142	45	140	5.0
SPH-900	雙速 Two-Speed	900	14	700	12.5	2.8	21	410	510	32.5	45	55	29	150	60	136	7.5
SPH-1200		1200	14	700	12.5	2.8	19	425	536	32.5	48	55	29	150	65	137	9.0
SPH-2000		2200	14	700	14.5	2.8	21	425	536	32.5	45	55	29	150	60	136	10.5
SPH-3000		3000	14	700	14.5	2.8	21	425	562	45.0	48	55	29	150	65	137	13.6



SPHW 手動水壓/油壓泵浦

- 手動操作泵浦，操作液體可為"水"，壓力可達700bar。
- 不銹鋼材質及特殊防鏽處理。
- 亦可操作油液為媒介。
- 如同其他經過長時間測試的700bar系列泵浦：安全無虞。
- 高-低壓自動切換泵浦；增加工作效率。




Water/ Hydraulic Manual Pump

- ※Manual pump whose hydraulic fluid is "water" and can increase the pressure up to 700bar.
- ※Special rust-proof treatment is performed to the stainless-steel materials or special steel where the pump contacts water.
- ※Can be used in a place where the usage of oil is hesitated.
- ※A safe mechanism incorporating a safety valve like other time-tested 700 bar series.
- ※Automatic high-low pressure switching pump for improved work efficiency.

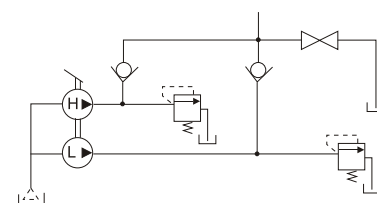

單位unit (mm)

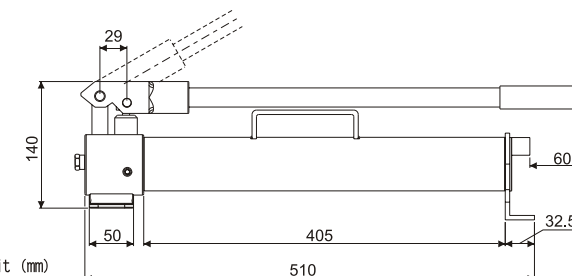

Model Number 型號	Pressure Rating (psi)/(bar) 輸出壓力		Output flow rate (c.c/stroke) 流量		Water capacity 水箱容量 (c.c)	Weight (No water) 重量(無水) (kg)
	1 st stage	2 nd stage	1 st stage	2 nd stage		
SPHW-900	290(20)	10,000(700)	13.0	2.3	900	5.7


SPHP 手動油壓泵浦頭

- 可調式連結設計，可減少施力。
- 萬向泵浦頭便於安裝。
- 多款操作壓力可供選擇。
- 適用於空間限制或做為低壓高流量的備用手動油壓動力單元。
- 亦適用於當泵浦油箱需更換時。
- 把手材質為鋁合金，其長度 ϕ 22 * 600L。

Special Application Pump Head

- ※Adjustable linkage for reduced handle force.
- ※Swivel pump head for flexible fixturing.
- ※Wide range of operating pressures to select from.
- ※Design for tight mounting space, backup manual power or lower pressure and high flows.
- ※Design for applications when pumps oil tank need to be changed.

※SPHP and SPHH handle construct by Aluminum Alloy which dimension be ϕ 22 * 60 mm.

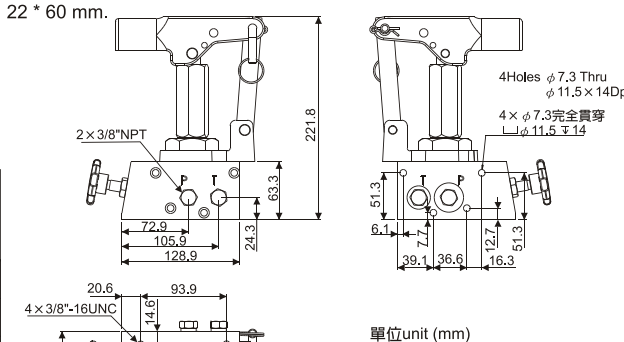

單位unit (mm)

Model No. 型號	Pressure Rating 輸出壓力 (psi)/(bar)	Volume 流量 (c.c/stroke)	Max. Handle Eff. 最大施力 (kgf)	Weight 重量 (kg)
SPHP-50	750(50)	75	36	5
SPHP-70	1,000(70)	35	48	5
SPHP-210	3,000(210)	22	54	4
SPHP-450	6,500(450)	9	54	4
SPHP-700	10,000(700)	5	54	4