

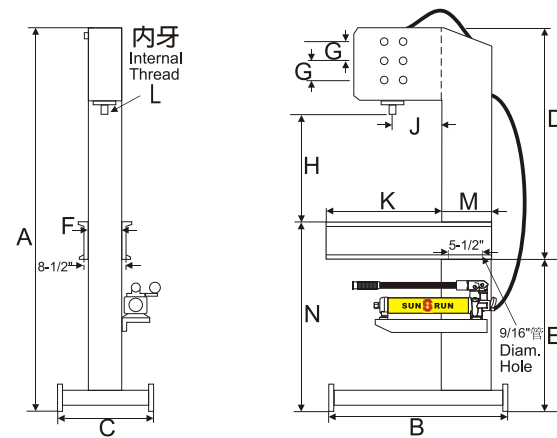



SPM C型油壓床 C Frame Shop Press



SPM-256C



SPM-256CC



SPM-256CF

H-Frame Press Dimensions (mm)															
外型尺寸															
A	B	C	D	E	F	G	H(Cyl. Retracted)	J	K	L (in)	M	N	P	R	底座 Floor Space
1972	622	610	1057	914	152	127	260, 387, 514	165	318	1-1/2-16	203	1092	51	178	610*622

Model No. 壓床型號	Cylinder Model 油壓缸型號	Cap. (tons) 能力	Type of Cylinder Used 油壓缸型式	Stroke 揚程	Speed(in./stroke) 速度		Pump type 泵浦	Weight (kg) 重量
					Advance 前進	Pressing 擠壓		
SPM-256C	RSC-256	25	Single-Acting	158mm	0.129	0.03	Hand	109

標準液壓手動泵浦 (詳見型錄SPH系列)

Equipped with Hydraulic Manual Pump (reference SPH series)

Model Number 型號	Usable Oil Capacity 有效油量 (cm ³)	Pressure Rating 輸出壓力		Oil Displacement per Stroke 輸出油量		Piston Stroke 行程 (mm)	Max. Pressure 最大使用壓力 (psi)/(bar)
		1 st stage	2 nd stage	1 st stage	2 nd stage		
SPH-1200	1200	14	700	12.5	2.8	19	10,000(700)

選配液壓電動泵浦 (詳見型錄SPE-3000系列)

Opt Hydraulic Electric Pump(reference SPE-3000 series)

Model Number 型號	Motor 馬達	Pressure Rating (Psi)/(bar) 輸出壓力		Output flow rate (L/min) 輸出油量		Max. Pressure 最大使用壓力 (psi)/(bar)
		1 st stage	2 nd stage	1 st stage	2 nd stage	
SPE-3000	0.5hp	200(14)	10,000(700)	4	0.4	10,000(700)

SPM Series

Capacity:
25 tonStroke:
158 mmMaximum Operating Pressure:
700 bar

NSC 螺帽破壞器

- 特殊設計工具鋼刀可精確劈開螺母至某一部份而不至損壞螺牙。
- 適用性廣泛，包括卡車維修、管路工程、槽罐清理、石化工業、鋼鐵建築、採礦..等。
- 可重新研磨重型刀頭。
- 單動，彈簧回縮油壓缸。
- 頭部特殊角度，適用各作業。
- 整體的設計，使用方便。

Hydraulic Nut Splitter

※ Specially designed "tool steel" cutter blade penetrates the nut to the precise point where it cracks, stopping short of the bolt threads.



※ Applications include servicing trucks, piping industry, tank cleaning, petrochemical, steel construction and mining.

※ Heavy-duty chisels can be reground.

※ Sing-acting, spring return cylinder.

※ Unique angled head allows flush access.

※ Compact and ergonomic design, easy to use.

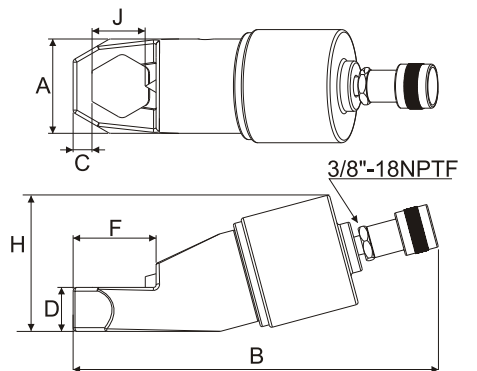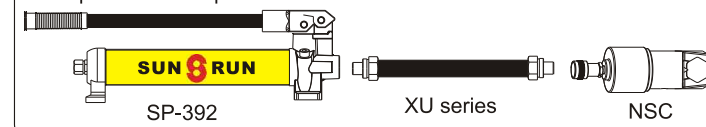螺帽破壞器組-建議選配
Nut Splitters Sets-Opt


Model No. 型號	Hex. Nut Range 六角螺帽		Bolt Range 螺栓		Capacity 能力 (ton)	Oil Capacity 總油量 (cm ³)	Dimensions(mm) 尺寸							Weight 重量 (kg)
	(in)	(mm)	(in)	(mm)			A	B	C	D	F	H	J	
NSC-1319	0.50-0.75	10-19	0.31-0.50	M6-M12	5	15	40	200	6	19	28	48	21	0.8
NSC-1924	0.75-0.94	19-24	0.50-0.63	M12-M16	10	20	55	227	8	25	38	71	25	2.0
NSC-2432	0.94-1.13	24-32	0.63-0.88	M16-M22	15	60	66	260	10	31	49	76	33	3.0
NSC-3241	1.13-1.56	32-41	0.88-1.13	M22-M27	20	80	75	286	15	35	56	89	43	6.3
NSC-4150	1.56-2.00	41-50	1.13-1.38	M27-M33	35	155	96	325	21	45	73	109	54	8.6
NSC-5060	2.00-2.25	50-60	1.38-1.50	M33-M39	50	240	106	366	27	54	92	126	60	11.8
NSC-6075	2.38-2.88	60-75	1.50-1.88	M39-M48	90	492	156	366	27	75	110	180	78	34.1

WSR 楔型撐開器

- 單動彈簧回縮。
- 適用於工作空間非常狹小環境。

Hydraulic Wedgie and Spread Cylinder

- ※ Single-acting, spring return.
- ※ For use in very confined work areas.

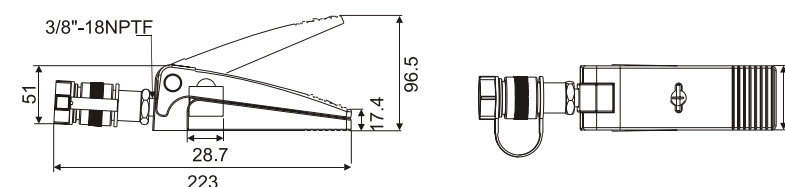

Cylinder Capacity 油壓缸荷重 (ton)kN	Model Number 型號	Tip clearance 尖端空隙 (mm)	Maximum Spread 最大撐開 (mm)	Cylinder Eff. Area 油缸受壓面積 (cm ²)	Oil Capacity 總油量 (cm ³)	Weight 重量 (kg)
1(8.9)	WSR-1	17.4	96.5	6.5	10	2.3

NSC Series

Capacity:
5-90 tonBolt Range:
M6-M48Hex.Nut Range:
10-75 mmMaximum Operating Pressure:
700 bar

WSR-1 Series

Capacity:
1tonTip Clearance:
17.4mmMaximum Spread:
96.5mmMaximum Operating Pressure:
700 bar