

CLASSIC TORQUE WRENCHES

TORQUE WRENCH


- Length independent mechanism
- Push through reversible mechanism
- Retractable adjustment mechanism avoids accidental adjustment
- Accurate to $\pm 4\%$
- Complies with ISO 6789
- Supplied in sturdy plastic storage case

	Range	Size	L (mm)	EAN
AVT100A	2.5-11Nm	3/8"	318	5024344005120
AVT300A	5-33Nm	3/8"	422	5024344005137
AVT600	12-68Nm	3/8"	476	5024344005144
EVT600A	12-68Nm	1/2"	476	5024344009111
EVT1200A	25-135Nm	1/2"	546	5024344009074
EVT2000A	50-225Nm	1/2"	597	5024344009081
EVT3000A	70-330Nm	1/2"	825	5024344009104
HVT5000	140-560Nm	3/4"	1130	5024344934406
HVT7200	200-810Nm	3/4"	1181	5024344010902
GVT8400	480-940Nm	1"	1397	5024344009678



Classic Torque Wrench Ranges

Ref.	Square drive	N.m																			
		2.5	5	10	20	33	50	70	100	135	200	225	300	330	480	720	940				
AVT100A	3/8	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█			
AVT300A			█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█			
AVT600				█	█	█	█	█	█	█	█	█	█	█	█	█	█	█			
EVT600A	1/2			█	█	█	█	█	█	█	█	█	█	█	█	█	█	█			
EVT1200A					█	█	█	█	█	█	█	█	█	█	█	█	█	█			
EVT2000A						█	█	█	█	█	█	█	█	█	█	█	█	█			
EVT3000A							█	█	█	█	█	█	█	█	█	█	█	█			
HVT5000	3/4								█	█	█	█	█	█	█	█	█	█			
HVT7200																		█	█		
GVT8400	1																			█	█

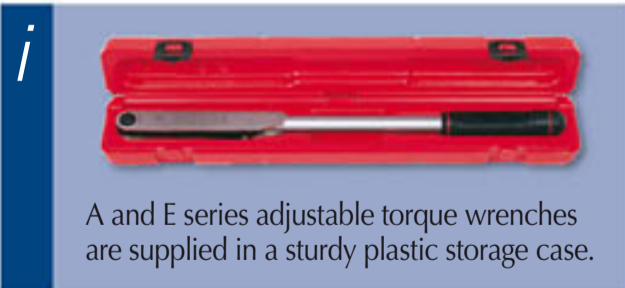

A and E series adjustable torque wrenches are supplied in a sturdy plastic storage case.



Scale Divisions

Series	N.m	Kg.m	lbf.in	lbf.ft
100	0.5	0.1	10.0	1.0
300	1.0	0.1	10.0	1.0
600	2.0	0.2	20.0	2.0
1200	5.0	1.0	50.0	2.0
2000	5.0	1.0	50.0	2.0
3000	10.0	1.0	100.0	10.0
5000	10.0	-	100.0	10.0
8400	10.0	-	-	10.0

