



Products

Information

Service

Company Profile

Global Network

▶ Contact Us


TAMPING RAMMER MT-SERIES, MTR-SERIES



MT-65H

Mikasa Brand Tamping Rammers are recognized as the industry standard for cohesive soils and asphalt. Suitable for trench work, pipelines, patching, etc.

- * 4-cycle Gasoline Engine and Diesel
- * Double Cleaner System
- * Heavy-duty Shock Rubber absorb kikbacks.
- * High-density Polyethylene Fuel Tank eliminate corrosion (except MT-76D)
- * Rack and pinion throttle lever (Mikasa original)
- * Laminated wood (Plywood) and steel well absorb shock and stress. (except MT-72SGK)

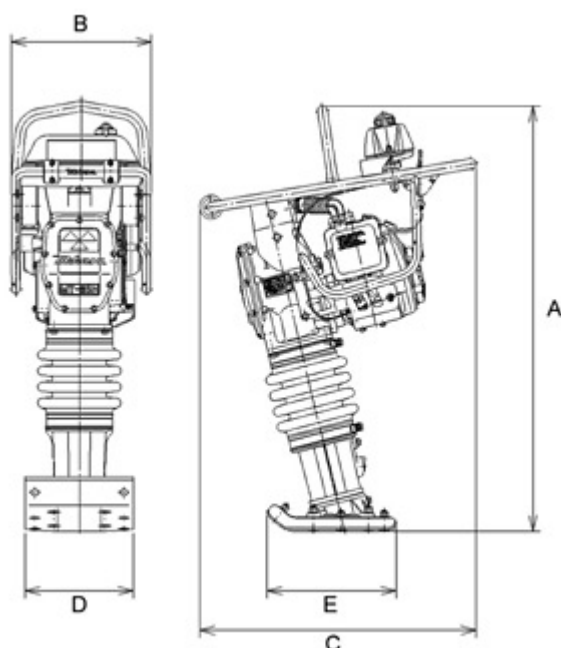

SPECIFICATION (Features and specifications are subject to change without notification.)

Remarks

Model	Operating Weight	Dimensions			Plate Size		Jumping Stroke)	Impact Force (max.)	Impact Number	Fuel Tank Capacity	Power Source
	Kg	L (mm)	W (mm)	H (mm)	L (mm)	W (mm)	mm	kN	number per minute	liters	
<u>MTR-40F</u>	46	620	350	1110	270	150	40-55	5.4kN (550kgf)	660-695	2.0	Robin EH09-
<u>MT-55</u>	57	680	350	1030	340	265	30-70	9.8kN	600-695	2.0	Robin EH09-

								(1,000kgf)			
<u>MT-65H</u>	66	730	370	1070	340	285	50-80	12.7kN (1,300kgf)	640-695	2.0	Honda GX1
<u>MT-72FW</u>	74	730	415	1045	340	285	50-75	13.7kN (1,400kgf)	640-680	2.5	Robin EH12-
<u>MT-84F</u>	85	730	415	1025	340	285	50-80	15.7kN (1,600kgf)	660-700	2.5	Robin EH12-
<u>MT-76D</u>	80	740	410	1010	340	285	50-80	15.7kN (1,600kgf)	650-700	3.3	Yanmar L40A diesel engi
<u>MT-72SGK</u>	81	730	415	1135	330	285	40-60	11.8kN (1,200kgf)	640-680	2.0	Robin EH12-



Copyrights 2005 MIKASA SANGYO CO.,LTD All Rights Reserved.