



# Portable Concrete Vibrator

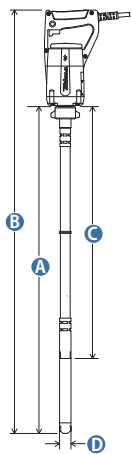

- The handle grip is a split type and the anti-vibration rubber on the surface where your hands touch reduces fatigue.
- A wear resistant cover is placed on the switch lever and stopper areas to stop concrete and water from entering.
- The portable vibrator is best suited for stone masonry, gutters, building foundations, and concrete products.
- MGX-series Hose Length Variety **0.6m~2.0m**.

## MGX-series Hose Length Variety

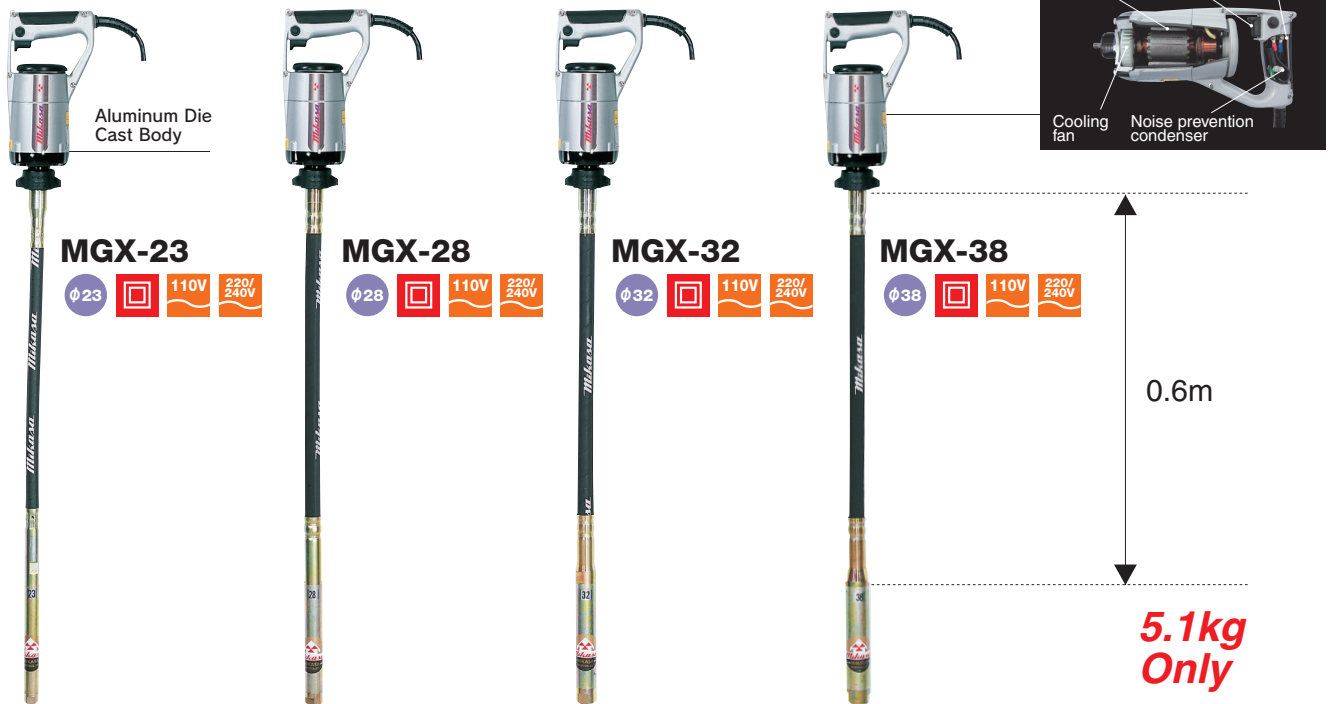

## MGX Specifications

model	vib.head dia. x length (mm)	inner shaft dia. (mm)	rubber casting dia. (mm)	amplitude (mm)	vibration Hz (V.P.M.)	power (W) (single phase)	weight(kg)
MGX-23	23 x 780	8	20	1.2	200-258 (12,000-15,500)	output: 280	4.2
MGX-28	28 x 780		24.6	1.8			4.6
MGX-32	32 x 780			1.9			4.8
MGX-38	38 x 780			2.0			5.1

hose length (m)	0.6 (STD)	1	1.5	2
shaft length (mm)	780	1,180	1,680	2,180