

INTERNATIONAL PUMP MANUFACTURING


IPM®

USA

THE EXPERTS IN
AIR POWERED
PISTON PUMPS
& EQUIPMENT

Product Range

- * Chemical Drum Pumps
- * Spray Painting Systems
- * Spray Coating Systems
- * Heated Spray Equipment
and more.....




IPM

Visit our website for technical data sheets, system components, and suggestions for the successful pumping and handling of polyurethane, chemicals, polyurea and other two component materials.

www.ipmpumps.com

IP-01	
Pressure Ratio :	1 : 1
Max. fluid flow :	4 gpm (15 lpm)
Air motor diameter :	2.0" (5.1 cm)
Air inlet pressure range :	40-180 psi (3-12 bar)
Max. fluid pressure :	180 psi (12 bar)
Air inlet size :	1/4" NPT (F)
Fluid inlet size :	3/4" NPT (M) (Stubby)
Fluid outlet size :	3/4" NPT (F)
Rod and cylinder :	CS & SST
Throat packing :	PE
Piston packing :	UHMWPE
Length (Drum Length):	51.8" (1315 mm)
(Stubby):	24.2" (615 mm)
Weight:	18 lb (8.2 kg)
:	12 lb (5.5 kg)

IP-02	
Pressure Ratio :	2 : 1
Max. fluid flow :	2.5 gpm (9.5 lpm)
Air motor diameter :	2.0" (5.1 cm)
Air inlet pressure range :	30 - 180 psi (3 - 12 bar)
Max. fluid pressure :	360 psi (24 bar)
Air inlet size :	1/4" NPT (F)
Fluid inlet size :	3/4" NPT (F) (Stubby)
Fluid outlet size :	3/4" NPT (F)
Rod and cylinder :	CS & SST
Throat packing :	Teflon
Piston packing :	Teflon
Length (Drum Length):	50" (1270 mm)
(Stubby):	30.2" (768 mm)
Weight:	16.1 lb (7.3 kg)
:	14.1 lb (6.4 kg)

OP232C	
Pressure Ratio :	2 : 1
Max. fluid flow :	5.5 gpm (20.8 lpm)
Air motor diameter :	3.0" (7.6 cm)
Air inlet pressure range :	30 - 180 psi (2 - 12 bar)
Max. fluid pressure :	360 psi (24 bar)
Air inlet size :	1/4" NPT (F)
Fluid inlet size :	-
Fluid outlet size :	3/4" NPT (F)
Rod and cylinder :	SST
Throat packing :	Teflon
Piston packing :	Teflon
Length (Drum Length):	54" (1371 mm)
(Stubby):	-
Weight:	24.3 lb (11 kg)
:	-

IP-05	
Pressure Ratio :	5 : 1
Max. fluid flow :	2.5 gpm (9.5 lpm)
Air motor diameter :	4.25" (7.6 cm)
Air inlet pressure range :	40 - 180 psi (3 - 12 bar)
Max. fluid pressure :	900 psi (60 bar)
Air inlet size :	3/8" NPT (F)
Fluid inlet size :	3/4" NPT (F) (Stubby)
Fluid outlet size :	3/4" NPT (F)
Rod and cylinder :	SST
Throat packing :	UHMWPE/Teflon
Piston packing :	UHMWPE/Teflon
Length (Drum Length):	54.3" (1379 mm)
(Stubby):	25.2" (641 mm)
Weight:	30 lb (13.6 kg)
:	20 lb (9 kg)

IP-10	
Pressure Ratio :	10 : 1
Max. fluid flow :	3 gpm (11.4 lpm)
Air motor diameter :	6.0" (15.3 cm)
Air inlet pressure range :	40 - 180 psi (3 - 12 bar)
Max. fluid pressure :	1,800 psi (120 bar)
Air inlet size :	1/2" NPT (F)
Fluid inlet size :	3/4" NPT (F) (Stubby)
Fluid outlet size :	3/4" NPT (F)
Rod and cylinder :	SST
Throat packing :	UHMWPE/Teflon
Piston packing :	UHMWPE/Teflon
Length (Drum Length):	57.3" (1456 mm)
(Stubby):	28.4" (721 mm)
Weight:	43 lb (19.5 kg)
:	31 lb (14 kg)

IP-21	
Pressure Ratio :	2.5 : 1
Max. fluid flow :	3.9 gpm (14.8 lpm)
Air motor diameter :	2.0" (5.1 cm)
Air inlet pressure range :	30 - 180 psi (2 - 12 bar)
Max. fluid pressure :	450 psi (30 bar)
Air inlet size :	1/4" NPT (F)
Fluid inlet size :	3/4" NPT (M)
Fluid outlet size :	3/4" NPT (F)
Rod and cylinder :	SST
Throat packing :	PE
Piston packing :	UHMWPE
Length (Drum Length):	-
(Stubby):	32" (815 mm)
Weight:	-
:	16.1 lb (7.3 kg)

IP-22	
Pressure Ratio :	4.5 : 1
Max. fluid flow :	2.2 gpm (8.3 lpm)
Air motor diameter :	2.0" (5.1 cm)
Air inlet pressure range :	30 - 180 psi (2 - 12 bar)
Max. fluid pressure :	810 psi (54 bar)
Air inlet size :	1/4" NPT (F)
Fluid inlet size :	3/4" NPT (M)
Fluid outlet size :	3/8" NPT (F)
Rod and cylinder :	SST
Throat packing :	Teflon
Piston packing :	UHMWPE
Length (Drum Length):	-
(Stubby):	32" (815 mm)
Weight:	-
:	19.2 lb (8.7 kg)

IP-23	
Pressure Ratio :	8 : 1
Max. fluid flow :	1.4 gpm (5.3 lpm)
Air motor diameter :	2.0" (5.1 cm)
Air inlet pressure range :	30 - 180 psi (2 - 12 bar)
Max. fluid pressure :	1,440 psi (96 bar)
Air inlet size :	1/4" NPT (F)
Fluid inlet size :	3/4" NPT (M)
Fluid outlet size :	3/8" NPT (F)
Rod and cylinder :	SST
Throat packing :	Teflon
Piston packing :	UHMWPE
Length (Drum Length):	-
(Stubby):	32" (815 mm)
Weight:	-
:	16.5 lb (7.5 kg)


IP-24	
Pressure Ratio :	12.5 : 1
Max. fluid flow :	0.9 gpm (3.4 lpm)
Air motor diameter :	2.0" (5.1 cm)
Air inlet pressure range :	30 - 180 psi (2 - 12 bar)
Max. fluid pressure :	2,250 psi (150 bar)
Air inlet size :	1/4" NPT (F)
Fluid inlet size :	3/4" NPT (M)
Fluid outlet size :	3/8" NPT (F)
Rod and cylinder :	SST
Throat packing :	Teflon
Piston packing :	UHMWPE
Length (Drum Length):	-
(Stubby):	32" (815 mm)
Weight:	-
:	14.3 lb (6.5 kg)



Drum Mixer & Warmer

Cart Mounted Sprayer	
Pressure Ratio :	30 : 1
Max. fluid flow :	1gpm @ 60cpm
Air motor diameter :	6.0" (15.3)
Air inlet pressure range :	40-180psi
Max. fluid pressure :	3600psi

Two wheeled cart provides indoor or outdoor portability. Built-in hook transports 5 gallon pail with the cart. System is complete and ready to spray, and includes pump of choice, suction kit, filter, pressure hose, and air-assisted airless spray gun.

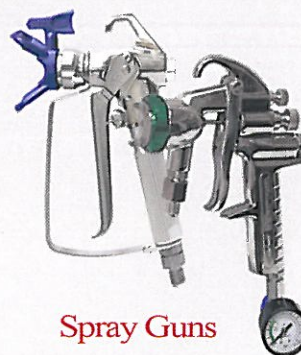

Spray Guns

IPM[®]

INTERNATIONAL PUMP MANUFACTURING (ASIA) PTE LTD

USA (Headquarters)

3107 142nd Avenue East
#106 Sumner, WA 98390, USA
Tel: (1) 253 8622222 Fax: (1) 253 8632223
Email: sales@ipmpumps.com

Asia Pacific Regional Office

209 Henderson Road #03-07
Henderson Industrial Park
Singapore 159551
Tel: (65) 6278 3288 Fax: (65) 6271 0426
Email: ipmasia@cehgroup.com

www.ipmpumps.com