


2 Pole

VIBRO Rotary Vibrator


Power cycle	50 Hz	60 Hz
Vibration cycles 3000 V.P.M. 3600 V.P.M.		

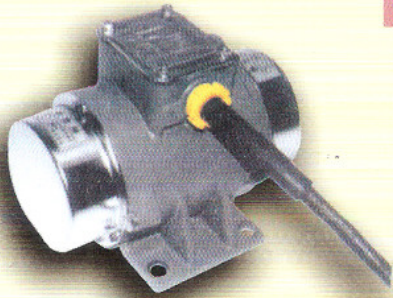

Main applications:

- Concrete outer mould vibration, such as bridge-work tunnel wall, sewer cover and prefabricated house, etc.
- Preventing the bridging forms in the bins, hoppers and discharge tubes.
- Vibration processing of bubble-removing processing in Epoxy production.
- The vibration tests for electronic and electronic engineering products. Such as computer and its peripheral equipment, TV set, audio, etc.
- For dust collecting machine. To reduce the air pollution.
 - a. To shake off the dust powders from the dust collecting tube.
 - b. To shake off the dust powders from the hopper.

SPECIFICATION

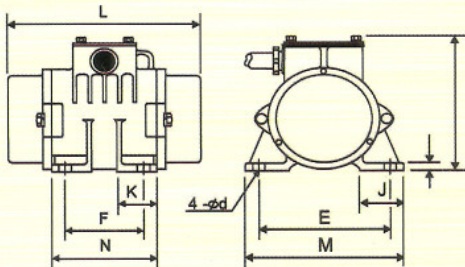

Dimension sketch

Type	Output		Vibrating force kgf	Outline dimension m/n										Weight kg
	kw	HP		E	F	M	N	J	K	L	H	G	d	
TV-100	0.1	1/8	100	130	50	160	80	45	*	210	144	9	11	8.5
TV-200	0.2	1/4	260	150	90	180	120	50	*	220	170	10	14	13
TV-400	0.4	1/2	600	178	123	220	160	45	52	284	181	14	14	23
TV-1200	1.2	1.5	1600	212	212	275	270	70	80	400	280	38	25	58

4 Pole

VIBRO Rotary Vibrator


Power cycle	50 Hz	60 Hz
Vibration cycles 1500 V.P.M. 1800 V.P.M.		



Main applications:

- Medium or low capacity vibration.
- Vibrating conveyor for medium or short range.
- Vibrating screen for medium or low capacity type.
- Hook is used in for hot dip galvanizing.
- Vibrating filter for liquid. Such as sludge or pulp.
- Low capacity resonance vibrating cleaner.
- Plastic pellet vibratin screen for capacity under 1500 kg/hr.
- Vibrating feeder and screen for foodstuffs, chemicals and foundry.

SPECIFICATION

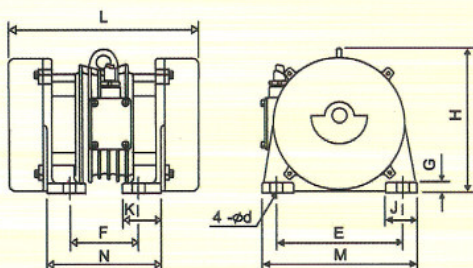

Dimension sketch

Type	Output		Vibrating force kgf	Outline dimension m/n										Weight kg
	kw	HP		E	F	M	N	J	K	L	H	G	d	
FV-200	0.2	1/4	400	150	90	180	120	50	40	252	197	13	14	21
FV-250	0.25	1/3	530	180	120	230	180	55	50	335	223	26	18	30.5
FV-400	0.4	1/2	800	220	120	270	200	55	65	335	255	18	22	50
FV-750	0.75	1	1600	260	140	320	230	68	80	406	307	24	28	72
FV-1500	1.5	2	3200	310	180	385	300	90	95	500	314	38	33	112
FV-2500	2.2	3	5000	360	210	460	330	115	125	535	380	35	35	180
FV-3500	3.7	5	7500	380	290	500	455	145	135	695	425	32	41	295
FV-6000	5.5	7.5	8500	440	320	585	495	155	150	820	505	45	54	460