

6 Pole

VIBRO Rotary Vibrator


Power cycle	50 Hz	60 Hz
Vibration cycles	1000 V.P.M.	1200 V.P.M.

Main applications:

- Sand shakeouts vibration machine for castings. The loaded capacity:500-1500 kg/time.
- Vibrating cooler for foundry to recycle sands.
- Medium or high capacity vibrating cleaner.(10 years patent in U.S.A.)
- Medium capacity vibrating dryer or medium capacity vibrating cooler.
- Medium range vibrating conveyor for material collection.
- Vertical vibrating conveyor for bulk material.
- High capacity vibrating hydro-extractor.
- Vibrating conveyor and screen for gravel pits and mines.

SPECIFICATION

Type	Out put		Vibrating force kgf	Outline dimension m/n										Weight kg
	kw	HP		E	F	M	N	J	K	L	H	G	d	
SV-400	0.4	1/2	800	220	120	270	200	55	65	412	255	18	22	59
SV-750	0.75	1	1500	260	140	320	230	68	80	446	307	24	28	79
SV-1500	1.5	2	3000	310	180	385	300	90	95	500	314	38	33	121
SV-2500	2.2	3	4000	360	210	460	330	115	125	535 (645)	380	35	35	179
SV-3500	3.7	5	6000	380	290	500	455	145	135	695 (785)	425	32	41	326
SV-6000	5.5	7.5	8000	440	320	585	495	155	150	820	505	45	54	480
SV-7500	7.5	10	11000	480	360	620	570	160	170	900	532	55	54	580

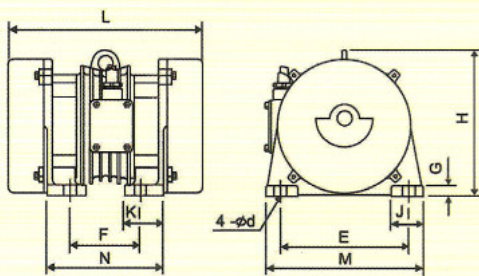

Dimension sketch

8 Pole

VIBRO Rotary Vibrator


Power cycle	50 Hz	60 Hz
Vibration cycles	750 V.P.M.	900 V.P.M.

Main applications:

- Vibrating screen for separating the polyethylene strips and fine powders.
- Vertical vibrating cooler for glaze strips and plastic pellet.
- Dipping vibrating conveyor for hot glass paste waste material.
- Low speed vibrating feeder for electroplating.
- Vibrating feeder for large-sized, heavy-duty packing machine.
- Vibrating table or vibration tests machine for medium speed simulating.
- Vibrating screen for mushroom sizing.
- Long range vibratory conveying filler for high capacity packing cylinder.
- Vibration tests for large-sized electric appliances.(Earthquake simulator)

SPECIFICATION

Type	Out put		Vibrating force kgf	Outline dimension m/n										Weight kg
	kw	HP		E	F	M	N	J	K	L	H	G	d	
EV-750	0.75	1	1000	260	140	320	230	68	80	516	307	24	28	81
EV-1500	1.5	2	2000	310	180	390	305	95	97	585	348	25	33	155
EV-2500	2.2	3	3000	360	210	460	330	115	125	645	380	35	35	210
EV-3500	3.7	5	5000	380	290	500	455	145	135	785	425	32	41	360
EV-6000	5.5	7.5	7500	440	320	585	495	155	150	820	505	45	54	500
EV-7500	7.5	10	10000	480	360	620	570	160	170	900	532	55	54	650

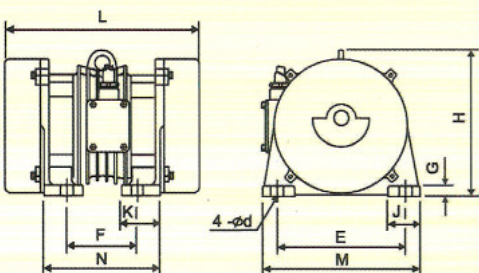

Dimension sketch