

Mag Plus Probe For Leak Detection


Third party certification exceeds EPA performance standards

Certified performance for Inventory control and In-tank leak detection in gasolines, diesel and a wide variety of other approved fluids.

- Highly accurate Magnetostrictive measurement technology.
- Fast, accurate leak tests.
- MAG Plus Probe third-party certified to exceed U.S. EPA performance standards for 0.1 GPH Volumetric Tank Tightness Testing as well as 0.2 GPH monthly and continuous testing.
- MAG Plus Probe is compatible with all TLS consoles. (Software Version 11 or higher for TLS-350/300)
- Compatible with gasoline, diesel and other approved fluids.
- 2", 3" and 4" float kits available.
- MAG Plus Probe is available in standard and custom lengths up to 12'.

Features

- MAG Plus Probe provides highly accurate trouble free performance in gasoline, diesel and a wide variety of approved fluids.
- Magnetostrictive technology and five-point temperature sensing make it capable of extremely accurate inventory control and in-tank leak testing.

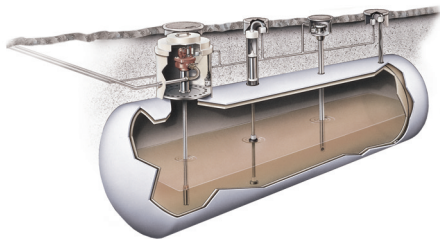

Standard Models:

Mag Plus Probe Form No.	Probe Length	Mag Plus Probe Form No.	Probe Length
846390-101	4'	846390-110	10' 6"
846390-102	5'	846390-111	11'
846390-103	5' 4"	846390-112	12'
846390-104	6'	846390-113	2.0 M
846390-105	7'	846390-114	2.5 M
846390-106	7' 6"	846390-116	2.667 M
846390-107	8'	846390-115	3.0 M
846390-108	9'		
846390-117	9' 6"		
846390-109	10'		

**Float kits for the specific fuel application must be ordered separately. Kits are available for 4", 3" and 2" floats. See the Veeder-Root price list for availability.*

Leak test performance

With 4" Floats (Third Party Certified)

Probe	Test Type	P (D)	P (FA)	Test Time
MAG Plus	0.1 GPH	99%	1%	3 Hours
MAG Plus	0.2 GPH	99%	<0.1%	2 Hours
MAG Plus with CSLD	0.2 GPH	99%	<0.1%	Continuous

Mag Plus Magnetostrictive probe console compatibility**

Probe	TLS-350R*	TLS-350Plus*	TLS-350*	TLS-350J	TLS-300i	TLS-300C
MAG Plus	•	•	•	•	•	•

• = Standard Feature

** A Four-Input Probe Interface Module is required for use of magnetostrictive probes with the TLS-350 or TLS-350R system.*

*** Software Version 11 or higher*

Probe Improved Specs

Standard	Min. Temp.	Max. Temp.	Min. Fuel*	Min. Water*
MAG	-20° C	+50° C	8"	0.750
MAG Plus	-40° C	+50° C	3.1"	0.630

* With 4" floats

For more information call

1-888-561-7942



4028-7th Street S.E., Calgary, Alberta T2G 2Y8
Ph:(403)243-1425 Fx:(403)243-6577 Toll Free: 1-800-921-ACCU(2228)
Email: sales@accuflow.com Website: www.accuflow.com