


Gondola

For Maintenance use

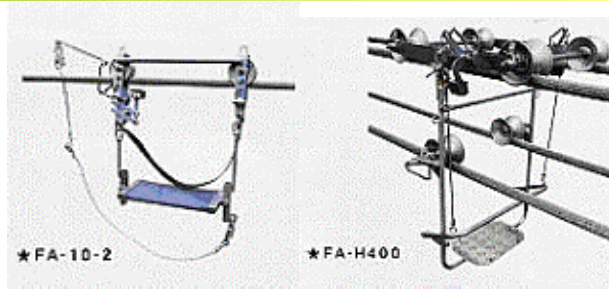

Model No.	FA-10-2	FA-H20-4	FA-H400	FA-H500
Application	Single Wire	Double Wires	2 / 4 Wires	2 / 4 Wires
Applicable Cable Size ACSR (mm ²)	(Type 41) 100 - 410 (Type 61) 330 - 610 (Type 81) 810 - 1160 (Type 152) 1520	240 - 810 (Distance between cables: 400mm & 500mm are both available)	240 - 810 (Distance between cables: 400mm)	240 - 810 (Distance between cables: 500mm)
Safety Load	100kg			
Weight (kg)	(Type 41) 8 (Type 61) 11 (Type 81) 13 (Type 152) 15	29	21	22

Without Engine



Model No.	For Mountainous Region			For Plain Region							
	FA-70SB	FA-80SB	FA-81SB	FA-20-1	FA-20-2	FA-70-1	FA-70-2	FA-30-1	FA-30-2	FA-80-1	FA-80-2
No. of conductor	2	4		2				4			
Applicable Cable Size ACSR (mm ²)	610 – 810			240 – 610		610 – 810		240 – 610		610 – 810	
Distances between conductors (mm)	500			400		500		400		500	
Loading Capacity (kg)	Catenary Angle 20° – 500			Catenary Angle 10° - 250							
	Catenary Angle 35° – 200			Catenary Angle 20° - 100							
Brake Mechanism	Servo controlled foot brake			Foot brake							
Cable Tangle Preventer	—			○	×	○	×	○	×	○	×
Weight (kg)	60	70	58	35	31	39	35	37	33	40	36
Option	Range Finder & Stopper			Range Finder & Stopper							

Towerhome



Model No.	Length (m)	Shape of main body	Safety Load KN (kfg)	Weight (kg)
KM-1	1.5	L type	2. 0 (200)	11
KM-2	2.0			13
KM-3	2.6			15
KM-4	3.0	C type		17
KM-5	4.5			27
KM-6	5.0			28
KM-7	6.0			44
KM-8	7.0			46

Pole Platform



★K-2



★KT-240



★KH-1



★K-300

Single Footrest Type

Model	Footrest length (mm)	Material of footrest	Available Pole dia. (mm)	Safety Load kN (kgf)	Weight (kg)	
					Anchoring fixture	Footrest
K-1	500	Wooden board	150-320	2.0 (200)	2.0	3.9
K-2	700					5.0
K-3	900					7.2
K-4	1,100					8.5
K-5	1,500					15.0
KT-240	240	Plywood	150-300	1.5 (150)	2.2	4.5
K-300	300				4.8	
K-300BT	300		150-320		3.6	
KH-1	900		150-320		4.7	

Single Footrest Type (for thick pole)

Model	Footrest length (mm)	Material of footrest	Available Pole dia. (mm)	Safety Load kN (kgf)	Weight (kg)	
					Anchoring fixture	Footrest
KL-1	500	Wooden board	300-600	2.0 (200)	3.1	4.0
KL-2	700					5.0
KL-3	900					7.0
KL-4	1,100					9.0
KL-5	1,500					15.0



★K-300BT



★K-22 2連式 (V型)

Double / Triple Footrests Type

Model	Footrest length (mm)	Material of footrest	Available Pole dia. (mm)	Safety Load kN (kgf)	Weight (kg)	
					Anchoring fixture	Footrest
K-21	500	Wooden board	150-320	2.0 (200)	2.7	4.0 + 3.8
K-22	700					5.2 + 5.0
K-23	900					7.1 + 6.9