


Single-switch selection of Intermittent or Continuous operation, Equipped with Ace Controller

GK Series

Efficient, Economical and Dependable... One compressor, double the function. A single switch allows selection of either continuous or intermittent compressor operation, so there's no need to choose a compressor for just one particular application.

When used in the intermittent operation mode, starting and stopping are smoother because the compressor stops and restarts after idle running in an unloaded state.

The unloaded state of GK Series compressors during intermittent operation reduces oil consumption and significantly improves the durability of most parts, resulting in lower operating costs. Stopping in an unloaded state means there's no sudden sound of air discharge typical of conventional intermittent-operation compressors.




G-15CK




G-22CK

2-stage compressor




GK-37

2-stage compressor

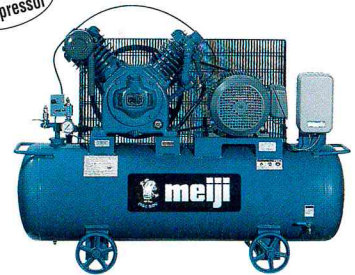


GK-55C

2-stage compressor




GK-75C

2-stage compressor

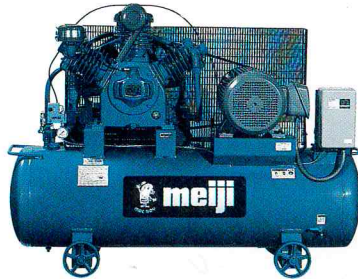

GK-110C

2-stage compressor

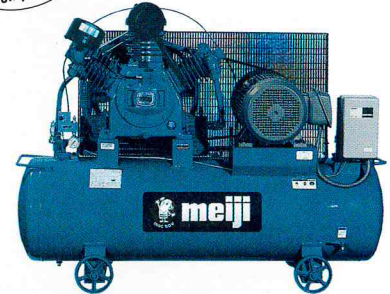

GK-150C


Model No.	Motor output kW[ps]	Operating pressure MPa [kgf/cm ²]	Free air delivery L/min	Basic compressor		Air tank capacity L	Air outlet dia.×qty. B	Approx. dimensions L×W×H mm mm mm	Noise level dB(A)	Weight (including motor) kg
				Rotating speed rpm	Model No.					
G-15CK	1.5 [2]	0.78 0.98 [8~10]	160	975	GNO-2C	71	G ¹ / ₄ ×1	1,130×394×758	73	98
G-22CK	2.2 [3]		240	985	GNO-3C	80	G ¹ / ₄ ×2	1,227×394×770	74	115
GK-37	3.7 [5]		430	950	BT-37	120	G ¹ / ₄ ×1, Rc ¹ / ₂ ×1	1,370×425×890		171
GK-55C	5.5 [7.5]		640	910	BT-55C	150		1,395×500×1,065	76	249
GK-75C	7.5 [10]		840	870	BT-75C	240	G ¹ / ₄ ×1, Rc ³ / ₄ ×1	1,560×600×1,150		303
GK-110C	11 [15]		1,330	945	BT-110C	260	G ¹ / ₄ ×1, Rc1×1	1,660×620×1,234	78	397
GK-150C	15 [20]	1,660	1,050	BT-150CP	260	1,660×620×1,242		80	437	

What's an ACE Controller?

Advanced Controller for Economical Operation

An ACE controller combines the functions of an unloader pilot valve and a pressure switch to allow one-touch switching between continuous and intermittent operation. It also functions as a start/stop switch.

When the pressure setting was reached in previous models during intermittent operation, activation of a pressure switch immediately stopped the compressor, exerting a strain on the moving parts and causing partial overheating, leading to excessive wear. In the GK Series with the ACE controller the compressor idles (in a no-load state) for 40 to 50 cycles before stopping, giving the cylinders and other parts a chance to cool down and allowing the moving parts to come to a smooth stop. Starting is also smoother, further reducing piston ring and bearing wear. The result is longer component life and enhanced durability.




What's the difference between a Single-stage and 2-stage Compressor? (GK-37~150)

Single-stage compressor draws in air and compresses it all at once to the pressure setting. 2-stage compressor first compresses the air to an intermediate pressure and cools it in a low-pressure cylinder, then compresses it to the pressure setting in a high-pressure cylinder. When air is compressed it becomes very hot, wasting energy and causing deterioration and carbonization of the compressor oil. Air does not get as hot in a 2-stage compressor, so the temperature of the discharged air is lower and less oil is consumed. Operating noise is also reduced.

Pressure Switch type

GH Series

In this type of control system, an automatic pressure switch repeatedly switches the motor on at 0.78MPa [8kgf/cm²] and off at 0.98MPa [10kgf/cm²]. Suitable for intermittent use of compressed air or for work at relatively high pressures.




GH-08D

Automatic Unloader type

GN Series

In this type of control system, an automatic unloader valve repeatedly switches the compressor between loaded operation at 0.78MPa [8kgf/cm²] and un-load operation at 0.98MPa [10kgf/cm²] without stopping the motor. Suitable for continuous operation at a fixed air delivery rate, and when large amounts of compressed air are needed at relatively low pressures.




GN-08D

Model No.	Motor output kW[ps]	Operating pressure MPa [kgf/cm ²]	Free air delivery L/min	Basic compressor		Air tank capacity L	Air outlet dia.×qty. B	Approx. dimensions L×W×H mm mm mm	Noise level dB(A)	Weight (including motor) kg
				Rotating speed rpm	Model No.					
GH-08D	0.75 [1]	0.78~0.98 [8~10]	80	1,040	GHO-1C	38	G ¹ / ₄ ×1	907×370×653	71	62
GN-08D	0.75 [1]	0.78~0.98 [8~10]	80	1,040	GNO-1C	38	G ¹ / ₄ ×1	907×370×673	71	61


Medium-pressure 2-stage type

GKH Series


These 2-stage air compressors are designed to deliver a medium level pressure of 1.37MPa [14kgf/cm²]. Suitable for use at garages and gasoline stations for inflating tires, operating pneumatic wrenches, etc.




GKH-22




GKH-37

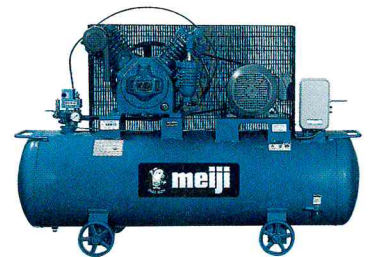

GKH-55C

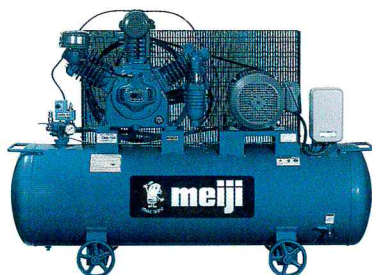

GKH-75C

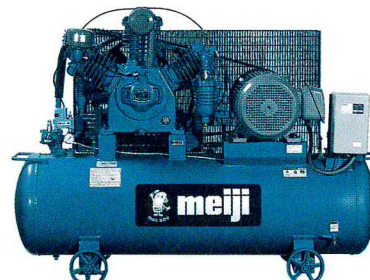

GKH-110C


Motor-driven, ACE controller type

Model No.	Motor output kW[ps]	Operating pressure MPa [kgf/cm ²]	Free air delivery L/min	Basic compressor		Air tank capacity L	Air outlet dia.×qty. B	Approx. dimensions L×W×H mm mm mm	Noise level dB(A)	Weight (including motor) kg
				Rotating speed rpm	Model No.					
GKH-22	2.2 [3]	1.18	215	785	BTH-22	155	G ¹ / ₄ ×1, Rc ¹ / ₂ ×1	1,350×510×935	74	180
GKH-37	3.7 [5]		380	850	BTH-37	220		1,608×560×1,008	75	227
GKH-55C	5.5 [7.5]	1.37 [12~14]	560	810	BTH-55C	260	G ¹ / ₄ ×1, Rc ³ / ₄ ×1	1,660×600×1,165	77	280
GKH-75C	7.5 [10]		790	850	BTH-75C			1,660×600×1,180	78	315
GKH-110C	11 [15]		1,140	860	BTH-110C			1,660×620×1,234	78	400

Package Screw Compressor

MS Series

- Big rotor with good rigidity and small distortion, not easy lock.
- Big bearing, relative light load with a big long life.
- Low noise frequency with minimum loudness.
- Small vibration, low failure rate, long life.



Model No.	Drive	Motor output kW [ps]	Max. operating pressure		Free air delivery m ³ /min	Approx. dimensions L × W × H mm mm mm	Weight kg
			MPa	mm			
MS-40/8B	Belt	4 [5.5]	0.8		0.5	820×700×1,010	300
MS-55/8B	Belt	5.5 [7.5]	0.8		0.8	820×700×1,010	300
MS-75/8B	Belt	7.5 [10]	0.8		1.2	1,065×845×1,230	500
MS-75/10B	Belt		1.0		1.0		
MS-75/13B	Belt		1.3		0.8		
MS-110/8B	Belt	11 [15]	0.8		1.7	1,065×845×1,230	500
MS-110/10B	Belt		1.0		1.5		
MS-110/13B	Belt		1.3		1.2		
MS-150/8B	Belt	15 [20]	0.8		2.4	1,065×845×1,230	550
MS-150/10B	Belt		1.0		2.2		
MS-150/13B	Belt		1.3		1.7		
MS-185/8B	Belt	18.5 [25]	0.8		3.0	1,080×920×1,415	650
MS-185/10B	Belt		1.0		2.7		
MS-185/13B	Belt		1.3		2.3		
MS-185/8D	Direct		0.8		3.0	1,420×850×1,110	
MS-220/8B	Belt	22 [30]	0.8		3.6	1,080×920×1,415	700
MS-220/10B	Belt		1.0		3.2		
MS-220/13B	Belt		1.3		2.7		
MS-220/8D	Direct		0.8		3.6	1,420×850×1,110	
MS-300/8B	Belt	30 [40]	0.8		5.0	1,300×1,100×1,650	1,000
MS-300/10B	Belt		1.0		4.5		
MS-300/13B	Belt		1.3		3.7		
MS-370/10B	Belt	37 [50]	1.0		5.6	1,300×1,100×1,650	1,050
MS-370/13B	Belt		1.3		4.8		
MS-370/8D	Direct		0.8		6.0	1,630×910×1,220	
MS-450/8B	Belt	45 [60]	0.8		7.5	1,300×1,100×1,650	1,150
MS-450/10B	Belt		1.0		6.5		
MS-450/13B	Belt		1.3		5.6		
MS-450/8D	Direct		0.8		7.5		
MS-550/10B	Belt	55 [75]	1.0		8.7	1,620×1,230×1,670	1,500
MS-550/13B	Belt		1.3		7.5		
MS-550/8D	Direct		0.8		10.5	1,950×1,160×1,550	
MS-750/8D	Direct	75 [100]	0.8		13.0	2,440×1,160×1,620	1,900
MS-750/10D	Direct		1.0		12.0		
MS-750/13D	Direct		1.3		10.0		
MS-900/8D	Direct	90 [120]	0.8		16.0	2,560×1,300×1,620	2,400
MS-900/10D	Direct		1.0		14.0		
MS-900/13D	Direct		1.3		12.0		
MS-1100/8D	Direct	110 [150]	0.8		20.0	2,760×1,340×1,710	3,200
MS-1100/10D	Direct		1.0		16.0		
MS-1100/13D	Direct		1.3		14.0		
MS-1320/8D	Direct	132 [175]	0.8		22.0	2,760×1,340×1,710	3,300
MS-1320/10D	Direct		1.0		20.0		
MS-1320/13D	Direct		1.3		16.0		
MS-1600/8D	Direct	160 [215]	0.8		27.0	2,860×1,510×1,810	3,800
MS-1600/10D	Direct		1.0		23.0		
MS-1600/13D	Direct		1.3		20.0		

Booster type


BOOSTER Compressor

Especially designed for Blow Molding and Laser Machine.

- Superior durability.
- Maximum operating pressure :
3.5MPa (Basic compressor : BB-483)
- Maximum free air delivery :
2,800L/min (Basic compressor : BB-483)



GBH-5548A

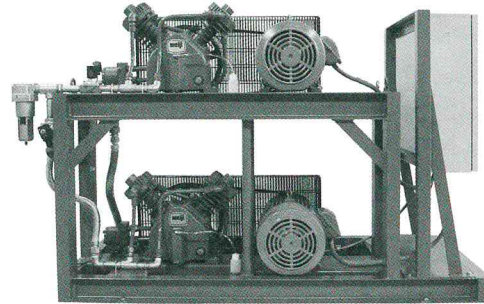


GBH7548-152


Model No.	Motor output kW	Operating pressure MPa	Max. suction pressure MPa	Max. free air delivery L/min	Basic compressor Model No.	Approx. dimensions L × W × H mm mm mm	Weight (including motor) kg
GBH-5548A	5.5	1.67~1.96	0.88	1,690	BB-482A	1,400×555×910	270
GBH7548-152	7.5×2	2.64~2.94	0.88	1,550×2	BB-482S	1,845×740×1,174	500
GBH1148-*	11	3.2~3.5	0.98	2,800	BB-483	—	—

Application example

For LGC

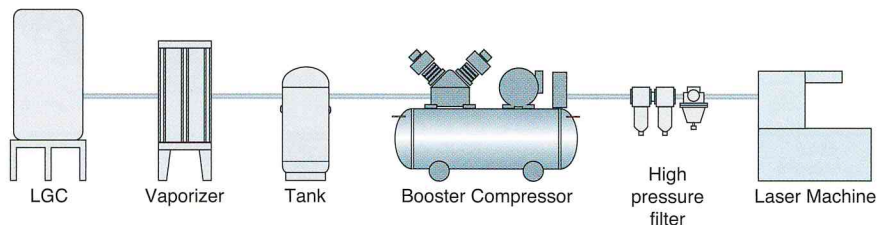

For PSA

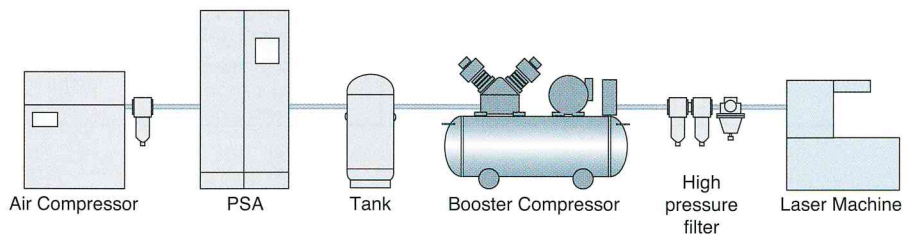

How to obtain maximum performance from an Air Compressor

The life and performance of an air compressor are greatly affected by the conditions in the location where it is installed. For this reason, it is important to follow the guidelines listed below to ensure long and efficient operation.


- (1) In locations where there is a large amount of dust, clogging of the filter will lead to a reduction in air delivery, wear of the cylinder, and a shorter bearing life. Select a location where there is little dust, low humidity, and good ventilation. Also select a location not exposed to direct sunlight or rain, and where the ambient temperature does not exceed 40°C. As the ambient temperature rises the discharge temperature will also rise, leading to an increase in oil consumption and shortening the life of the various compressor components.
- (2) Install the compressor on a flat, stable surface. If the installation location is uneven, it will cause vibration. If necessary, use a wedge to adjust the compressor so that it is level.
- (3) Allow sufficient space around the compressor to perform inspections and maintenance. There should be a clearance of at least 30 cm between the compressor and any walls around it.

Notice

- (1) The Air delivery value indicated is the amount of air delivered at maximum pressure, expressed as an equivalent at intake air pressure (atmospheric pressure).
- (2) The noise values indicated are measured at a distance of 1.5 m from the front of the compressor running under full load in an anechoic chamber.
- (3) The allowed ambient temperature range for operation is 2°C to 40°C.
- (4) Do not use compressed air for devices with direct air intake for respiratory organs.

Single-stage Basic Compressors

Meiji offers a wide selection of basic compressor for all types of applications, either mounted type or free-standing.

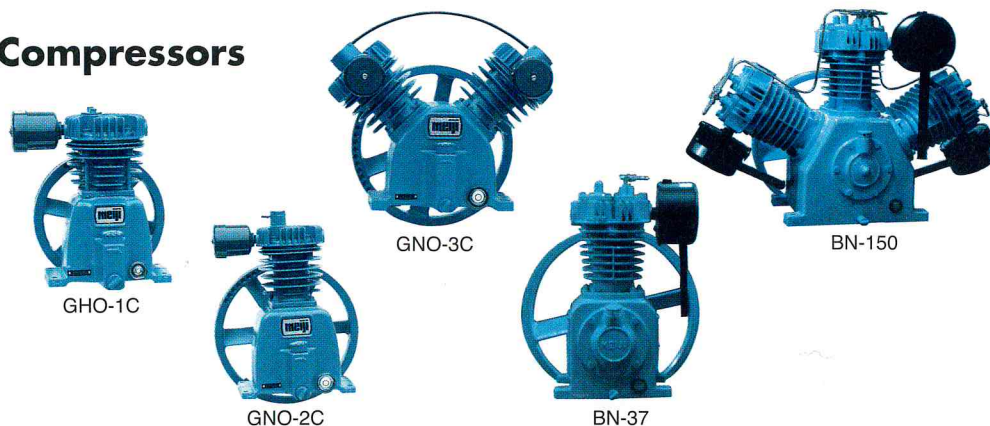

Model No.	Motor output kW [ps]	Max. pressure MPa [kgf/cm ²]	Free air delivery L/min	Compressor		Operation type	Air outlet dia. B	Pulley		Weight kg		
				Cylinder dia. × stroke × qty. mm mm	Rotating speed rpm			Outer dia. mm	Belt qty.			
GNO-1C	0.75 [1]	0.98 [10]	80	65×40×1	1,040	Continuous Intermittent	Rp $\frac{1}{2}$	240	1	17		
GHO-1C												
GNO-2C												
GNO-3C	2.2 [3]	0.69 [7]	240	65×56×2	985	Continuous, Intermittent	Rp1	325	2	31		
BN-37	3.7 [5]		500	90×108×2	500			Continuous, Intermittent	Rp1	500	2	89
BN-75	7.5 [10]		1,050	90×100×4	600							126
BN-150	15 [20]	1,850	90×100×6	740	3	181						

2-stage Basic Compressors


Two-stage basic compressor provides superior efficiency for cooling applications and also features excellent volume efficiency for compressed air.



Model No.	Motor output kW [ps]	Max. pressure MPa [kgf/cm ²]	Free air delivery L/min	Compressor		Operation type	Air outlet dia. B	Pulley		Weight kg
				Cylinder dia. × stroke × qty. mm mm	Rotating speed rpm			Outer dia. mm	Belt qty.	
BT-37	3.7 [5]	0.98 [10]	430	90/48×90×1/1	950	Continuous, Intermittent	Rp $\frac{1}{2}$	400	2	50
BT-55C	5.5 [7.5]		640	110/75×90×1/1	910		Rp $\frac{3}{4}$			62
BT-75C	7.5 [10]		840	90/75×90×2/1	870		Rp1			82
BT-110C	11 [15]		1,330	110/90×90×2/1	945			108		
BT-150CP	15 [20]		1,660	110/90×106×2/1	1,050			126		

Medium-pressure 2-stage Basic Compressors

Medium-pressure two-stage basic compressor provides superior efficiency for cooling applications and also features excellent volume efficiency for compressed air.

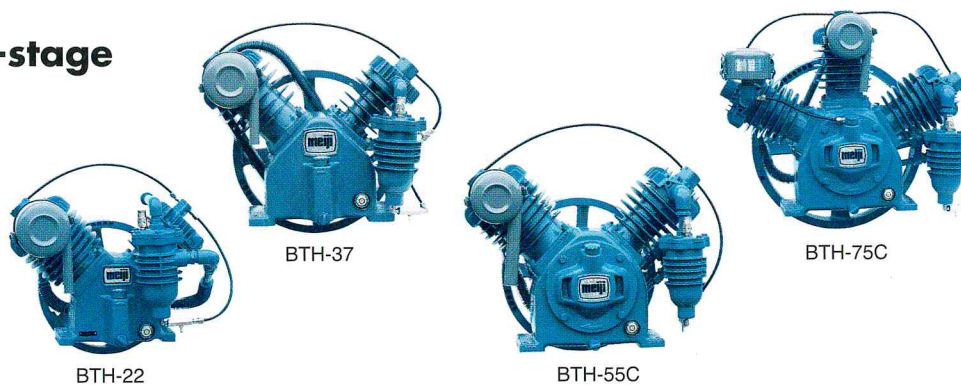

Model No.	Motor output kW [ps]	Max. pressure MPa [kgf/cm ²]	Free air delivery L/min	Compressor		Operation type	Air outlet dia. B	Pulley		Weight kg		
				Cylinder dia. × stroke × qty. mm mm	Rotating speed rpm			Outer dia. mm	Belt qty.			
BTH-22	2.2 [3]	1.37 [14]	215	90/65×56×1/1	785	Continuous, Intermittent	Rp $\frac{1}{2}$	325	1	42		
BTH-37	3.7 [5]		380	90/48×90×1/1	850		Rp $\frac{3}{4}$	400	2	54		
BTH-55C	5.5 [7.5]		560	110/75×90×1/1	810					Rp1	500	65
BTH-75C	7.5 [10]		790	90/75×90×2/1	850							84
BTH-110C	11 [15]		1,140	110/90×90×2/1	860		110					

Related & Auxiliary Equipment

MAO-MSL Series Line Filters

For removal of solid matter with a diameter of 1 μm or more.



MAO60-03D



MSL150B-04D



MSL400-10D

Model No.	Qty of processing air L/min	Filtering level μm
MAO60-03D	600	1
MAO120-04D	1,200	
MAO180-06D	1,800	
MAO370-10D	3,700	
MSL75B-03D	350	1
MSL150B-04D	1,200	
MSL200B-06D	1,800	
MSL250B-10D	2,700	
MSL400-10D	3,900	
MSL700-14D	6,600	
MSL1000-14D	10,600	
MSL1300-20D	13,800	

MAA-MSM Series Micro-mist Filters

For removal of solid matter with a diameter of 0.01 μm or more; also feature an oil collection efficiency of 0.01 mg/m³.



MAA60-03D



MSM150B-04D



MSM400-10D

Model No.	Qty of processing air L/min	Filtering level μm
MAA60-03D	600	0.01
MAA120-04D	1,200	
MAA180-06D	1,800	
MAA370-10D	3,700	
MSM75B-03D	350	0.01
MSM150B-04D	1,200	
MSM200B-06D	1,800	
MSM250B-10D	2,700	
MSM400-10D	3,900	
MSM700-14D	6,600	
MSM1000-14D	10,600	
MSM1300-20D	13,800	

MAC-MSK Series Activated Carbon Filters

Absorb and remove vaporous (malodorous) oil particles.



MAC60-03



MSK150B-04



MSK400-10

Model No.	Qty of processing air L/min	Density level of outlet oil mg/m ³
MAC60-03	600	0.003
MAC120-04	1,200	
MAC180-06	1,800	
MAC370-10	3,700	
MSK150B-04	1,200	0.003
MSK200B-06	1,800	
MSK250B-10	2,700	
MSK400-10	3,900	
MSK700-14	6,600	
MSK1000-14	10,600	
MSK1300-20	13,800	

AF Series Air Filters

For removal of relatively small particles of water and dust.



AF40-04

Model No.	Max. flow rate L/min	Filtering level μm
AF10	180	5
AF20	1,400	
AF30	3,300	
AF40	5,300	
AF50	11,000	
AF60	12,000	

AFM Series Mist Separators

For removal of small particles of water and dust.



AFM40-04

Model No.	Max. flow rate L/min	Filtering level μm
AFM20	200	0.3
AFM30	450	
AFM40	1,100	

AR Series Air Regulators

For reliable and accurate pressure regulation.



AR30-03G

Model No.	Max. flow rate L/min	Max. operating pressure MPa
AR10	125	1.0
AR20	800	
AR25	1,100	
AR30	1,500	
AR40	3,000	
AR50	10,000	
AR60	10,000	

Air Combination Set

An air filter, regulator and lubricator combined in a single set simplifies piping work.



AC40-04G

HB Series Air Transformers

For removal of relatively small particles of water and dust, and for convenient adjustment of air pressure.



HB-602

Model No.	Max. flow rate L/min	Max. operating pressure MPa	Filtering level μm
HB-602	800	1.0	15
HBH-602	950	1.4	

AD and FD Series Automatic Drain Valves for Piping Equipment

Automatically discharge drainage midway along a pipe line, or from an air cleaner or dryer.



AD-5

Model No.	Port size B
AD-5	Rc ¹ / ₂
FD-1D-04	
FD-5-04	
AD-402-04	

ADT Series Automatic Drain Traps

For trapping water and other drainage inside an air tank or air dryer and completely discharging it after a specified time.



ADT-3C

Model No.	Control system
ADT-2C (for use with an air tank)	Fixed one-hour timer + IC control using a water sensor
ADT-3C (for use with an air dryer)	Variable timer (2/5/10/20/30 minutes) + IC control using a water sensor

MDT-2E Drain Tanks

Collects heavy drainage and helps to keep the workplace clean. Use with ADT series automatic drain traps.



MDT-2E

Model No.	MDT-2E
Tank capacity L	10
Inlet	G ¹ / ₄ × 1
Weight kg	1

GOS Series Oil Sensors

Prevent compressor burn-out due to a depleted lubricating oil supply.


Model No.	Applicable compressor
GOS-3B	0.75~7.5kW
GOS-3BR	
GOS-20B	11~15kW
GOS-20BR	



GOS-3BR



GOS-20B



Model DD800 Dust Filters

Completely shuts out dust, ensuring that only clean air is supplied to the compressor.




DD-800



● R models automatically stop compressor operation.
● Models not marked with an R are warning buzzer types.

CLEAN AIR SYSTEM

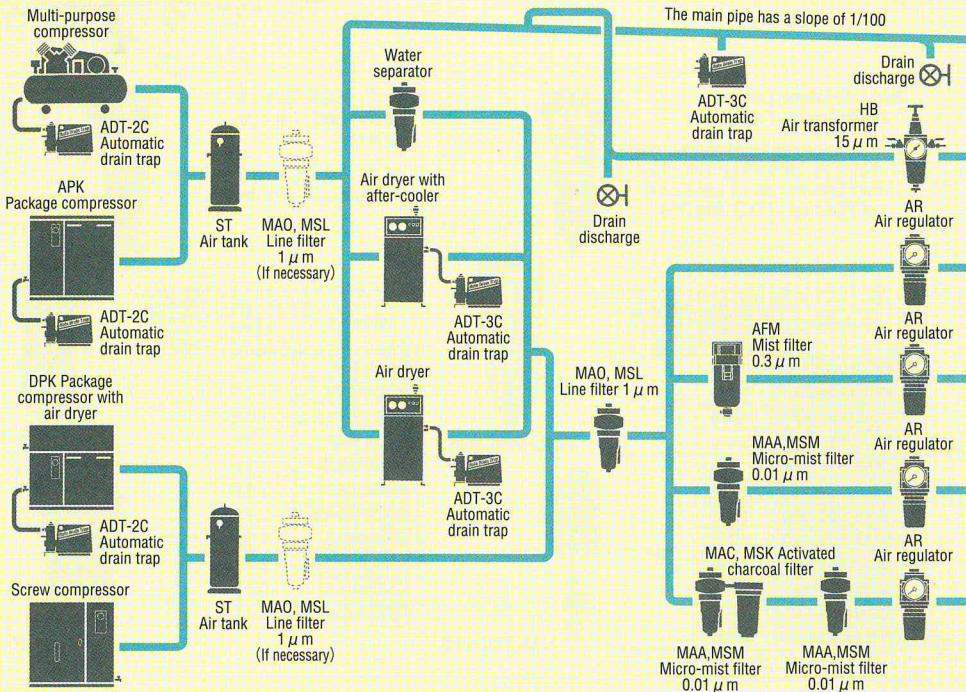

Even if spray gun offers superior performance, if the compressed air used contains dust, oil or drainage, the result will be swelling, warping, pinholes, uneven color and other defects in the painted surface. This problem can be overcome by using the appropriate combination of Meiji air cleaning equipment to suit the application.

For miscellaneous air work where the air may contain small amounts of water, oil or dust.

For general pneumatic tools and other equipment for which water must be removed but small amounts of dust or oil mist do not present a problem.

For magnetic valves and cylinders for general Industrial work, pneumatic equipment, and general painting work.

For precision industrial work, air jet rooms, high-grade painting, instruments, measurements, electronic components, conveying of bulk granule material, etc.

For use in the chemical, food product and pharmaceutical industries etc.

• Contact us for details.

Low-pressure,
Intermittent operation type

LW Series

3-year warranty

- 3-year or 9,000-hour warranty.
- It is an energy-saving type which reduces Life Cycle Cost(LCC).
- Realizing the maximum discharge amount of air in the general-use series by adopting a low-pressure specification in single-stage basic compressor.
- Enabling frequent starting/stopping without generating load according to frequency in use of compressed air, reducing burden to the compressor main unit.
- Achieving low-noise by adopting a low-noise filter and an air cushion valve.



LW-37



LW-75



LW-150




Pursuit of LCC (Life Cycle Cost)

Meiji is aiming at product making giving priority to reduction of running cost while taking LCC into consideration

LCC(Life Cycle Cost)

- Initial cost(purchases cost)
- Running cost(Operation cost, use cost)
- Maintenance cost(Maintenance and control cost)



Model No.	Motor output kW[ps]	Operating pressure MPa (kgf/cm ²)	Free air delivery L/min	Basic compressor		Air tank capacity L	Air outlet dia.×qty. B	Approx. dimensions L×W×H mm mm mm	Noise level dB(A)	Weight (including motor) kg
				Rotating speed rpm	Model No.					
LW-37	3.7 [5]	0.59~0.69 [6~7]	500	500	BN-37A	138	G ¹ / ₄ ×1, Rc ¹ / ₂ ×1	1,361×545×1,060	67	230
LW-75	7.5 [10]		1,050	600	BN-75A	254	G ¹ / ₄ ×1, Rc ³ / ₄ ×1	1,620×616×1,100	75	366
LW-150	15 [20]		1,850	740	BN-150A	285	G ¹ / ₄ ×1, Rc1×1	1,810×616×1,205	76	465

• The mechanisms, specifications and other information described in this catalog are subject to change without notice.



MEIJI AIR COMPRESSOR MFG. CO., LTD.

3-14, 2-chome, Tagawa, Yodogawa-ku Osaka 532-0027, Japan
Tel : 81-6-6309-1227 Fax : 81-6-6309-0157
E-mail : export1@meiji.co.jp



meiji



AIR COMPRESSOR

Related & Auxiliary Equipment

MEIJI AIR COMPRESSOR MFG. CO., LTD.