




The Right Connection®

HTE-Series

EQUALIZER, Connect Under Pressure, Flush Face Plug

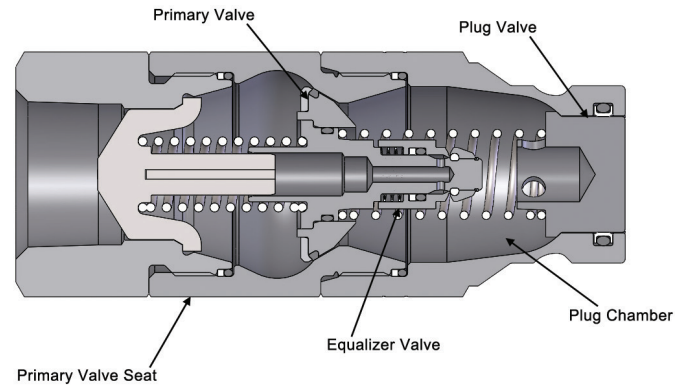

Applications:

- Ideal for hydraulic applications where connecting against residual pressure is required. Largely used in the construction equipment market, these couplings are the ultimate solution anywhere trapped pressure is an issue.

Sizes:

- $\frac{3}{8}$ " - 1"

Features:


- To be used in conjunction with Dixon HT series and other ISO16028 couplers
- Can be connected with residual pressure in the nipple up to 5,000 PSI
- Smooth connection action up to full working pressure
- Less susceptible to system contamination
- Compact design

Materials:

- Componentry: RoHS compliant zinc nickel plated steel
- Rings and pins: stainless steel
- Dust caps: nitrile
- Nitrile / Polyurethane seals standard

Specifications:

- $\frac{3}{8}$ ", $\frac{1}{2}$ " and $\frac{3}{4}$ " temperature range of **-65°F to 212°F (-54°C to 100°C)**
- $\frac{5}{8}$ " and 1" temperature range of **-40°F to 250°F (-40°C to 121°C)**
- Interchangeable with Parker FEC-Series, Stucchi APM-Series and Faster 3FFH-Series

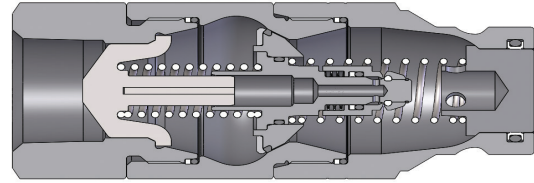

Body Size	Part Detail			Length		Maximum OD		Hex mm
	Part Number	Threads	Material	Inch	mm	Inch	mm	
3/8"	HTE3F4	1/2"-14 NPTF	steel	3.25	82.6	1.30	33.0	1-1/8"
3/8"	HTE3BF4	1/2"-14 BSPP	steel	3.25	82.6	1.30	33.0	1-1/8"
3/8"	HTE3OF4	3/4"-16 ORB	steel	3.25	82.6	1.30	33.0	1-1/8"
1/2"	HTE4F4	1/2"-14 NPTF	steel	3.40	86.4	1.30	33.0	1-3/16"
1/2"	HTE4BF4	1/2"-14 BSPP	steel	3.40	86.4	1.30	33.0	1-3/16"
1/2"	HTE4OF4	3/4"-16 ORB	steel	3.40	86.4	1.30	33.0	1-3/16"
1/2"	HTE4OF5	7/8"-14 ORB	steel	3.40	86.4	1.30	33.0	1-1/2"
1/2"	HTE4F6	3/4"-14 NPTF	steel	3.60	91.4	1.65	41.9	1-1/2"
1/2"	HTE4BF6	3/4"-14 BPSS	steel	3.60	91.4	1.65	41.9	1-1/2"
1/2"	HTE4OF6	1-1/16"-12 ORB	steel	3.60	91.4	1.65	41.9	1-1/2"
5/8"	HTE5OF5	7/8"-14 ORB	steel	3.75	95.3	1.65	41.9	1-1/2"
5/8"	HTE5F6	3/4"-14 NPTF	steel	3.75	95.3	1.65	41.9	1-1/2"
5/8"	HTE5BF6	3/4"-14 BSPP	steel	3.75	95.3	1.65	41.9	1-1/2"
5/8"	HTE5OF6	1-1/16"-12 ORB	steel	3.75	95.3	1.65	41.9	1-1/2"
3/4"	HTE6F6	3/4"-14 NPTF	steel	4.25	108.0	1.96	49.8	1-1/2"
3/4"	HTE6BF6	3/4"-14 BSPP	steel	4.25	108.0	1.96	49.8	1-1/2"
3/4"	HTE6OF6	1-1/16"-12 ORB	steel	4.25	108.0	1.96	49.8	1-1/2"
3/4"	HTE6F8	1"-11 1/2 NPTF	steel	4.40	111.8	1.96	49.8	1-3/4"
3/4"	HTE6BF8	1"-11 BSPP	steel	4.40	111.8	1.96	49.8	1-3/4"
3/4"	HTE6OF8	1-5/16"-12 ORB	steel	4.40	111.8	1.96	49.8	1-3/4"
1"	HTE8F8	1"-11 1/2 NPTF	steel	4.88	124.0	1.96	49.8	1-3/4"
1"	HTE8BF8	1"-11 BSPP	steel	4.88	124.0	1.96	49.8	1-3/4"
1"	HTE8OF8	1-5/16"-12 ORB	steel	4.88	124.0	1.96	49.8	1-3/4"
1"	HTE8F10	1-1/4"-11 1/2 NPTF	steel	5.00	127.0	2.47	62.7	2-3/16"
1"	HTE8BF10	1-1/4"-11 BSPP	steel	5.00	127.0	2.47	62.7	2-3/16"
1"	HTE8OF10	1-5/8"-12 ORB	steel	5.00	127.0	2.47	62.7	2-3/16"

Made in the USA



connect with us on



Dixon Quick Coupling
 2925 Chief Court • Dallas, NC 28034
 ph 800.839.8980 • fx 800.839.9022
dixonvalve.com