

# Submersible Sump Pump 2 inch Discharge



Teryair Submersible pumps have a small cross section and can be lowered into areas having small access hatches. Especially preferred where and electric spark may risk ignition or explosion.

### Applications

- Construction
- De-watering
- Engineering industry
- Transfer of fluids, usage in sumps for periodic de watering
- Marine- emptying ballast tanks, after washing procedure
- Draining cargo holds during and after washing procedure
- Pumping of sea water from bilges, holds, etc.




Model : SP 10

### Features

Will pump down to 22mm. will handle upto 3mm solids  
Governor controlled motor. Inbuilt oil grease lubrication system. Compact design enables uses in restricted areas.

### Specifications

IMPA No. : 59.16.35  
Net weight : 20.20 Kgs  
Height : 340 mm  
Minimum opening pump will enter : 204mm x 230mm  
Air inlet : 3/4" NPT  
Air Outlet : 1" BSPP  
Air consumption : 2.7 m3/min  
Recommended hose size : 12mm (1/2")  
Fluid inlet : Screen  
Fluid outlet : 2" NPT

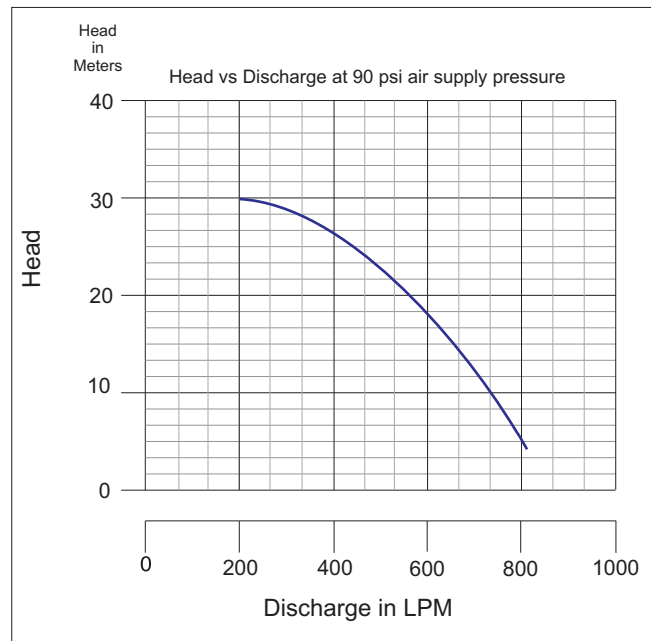

**Teryair Equipment Pvt. Ltd.**  
An ISO 9001-2008 company



www.terysair.com



Edited with Infix PDF Editor  
- free for non-commercial use.

To remove this notice, visit:  
[www.iceni.com/unlock.htm](http://www.iceni.com/unlock.htm)