

EAGLE lifts your business!



Japan's Share No.1

EAGLE currently shares 70% of Japan's Toe-Lift jack market.

Made in Japan

Most reliable and user friendly Engineered in Japan

Only EAGLE

Field KAIZEN spirit driven design Unique functions

Safe

EAGLE ensures to keep your operators safe,because..

Smart

EAGLE is designed to cause NO damage to your clients' properties.

Speedy

EAGLE eliminates waste of time and ensures highest efficiency at work.




EAGLE Japan's best sold toe-lift jack,makes your impossible possible. Rapidly growing Asian factoriesdemand speed,smartness and safetyin the heavy machinery moving andtransportation service as Japanesefactories demanded them.

EAGLE metthem all and now ready to serve you!


What is EAGLE's "Toe-Lift Jack"?

The special combination between a conventional hydraulic jack and a toe structural part made an EAGLE Toe-Lift Jack. It is intended to lift its load from significantly lower positions than before. As long as there is a gap of 20mm or so, Toe-Lift Jacks can lift the load than before.

Since the toe structural part has two lifting points, its toe and head points, it can be used for much wider applications than before.

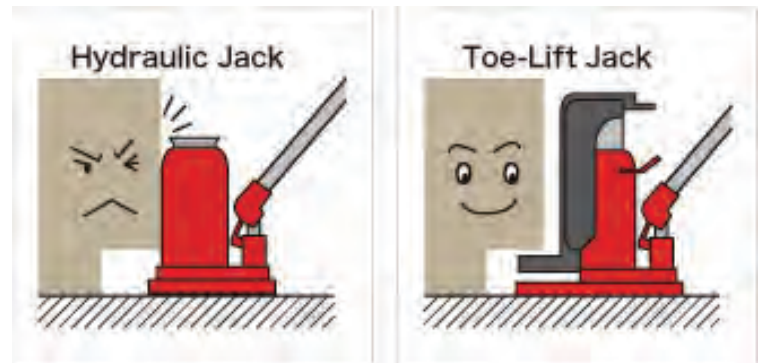


EAGLE Toe-Lift Jacks' Four Basic Functions

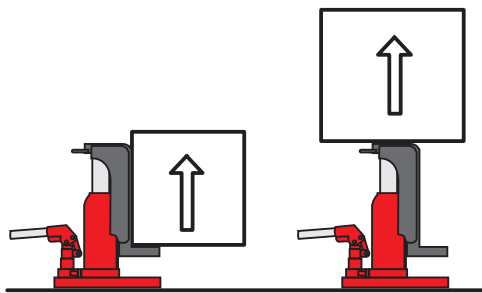


1 Lifting

It is a very basic function of it. Since both its toe and head can lift its load, its usage is twice than before.

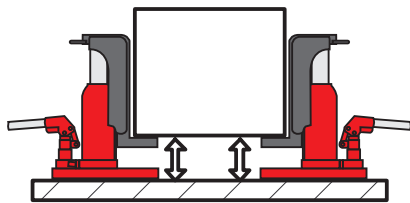


2 Adjustment of positioning

EAGLE can do position adjustment as fine as an millimeter order. It is best suited for delicate works like machines' level matching.



3 Widening

By placing its base on one side, and its toe on the other side, the Toe-Lift Jacks can widen the gap between two objects.

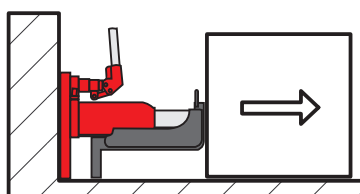

4 Lateral pressing


In case of setting a machine, you may sometimes want to slide it a little bit. EAGLE's Toe-Lift Jacks can be laid down to slide the machine by using the counterforce from the wall.

EAGLE's Achievement

Heaviest Use In Japan Now Ready In Asia

Japanese customers' demand for heavy items transportation is world's toughest and they even specify tools and equipment to be used for their orders. In such a tough market, more than 280,000 EAGLE products have been sold achieving Japan's No.1 market share (70%). EAGLE is now the best partner for moving and transportation industry in Japan.

The above figures are as of 2012.

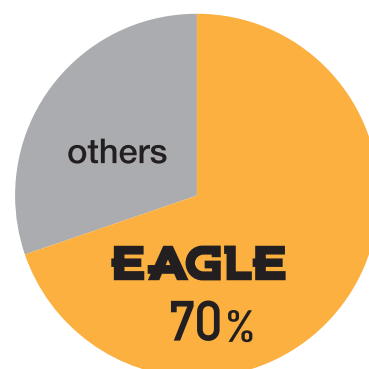

EAGLE's customers

Asahi Kasei Corp.

Canon Inc.

Carim Engineering Corporation

Daihatsu Motor Co.,Ltd.

DAINIPPON SCREEN MFG.CO.,LTD.

East Japan Railway Company

FANUC CORPORATION

FUJITSU LIMITED

Honda Motor Co.,Ltd.

IHI Corporation

IWASE TRANSPORTATION CO., LTD.

KINTETSU WORLD EXPRESS

DELIVERRY CO. LTD

K LINE (THAILAND) LTD.

KOKUYO Co.,Ltd.

Komatsu Ltd.

Murata Machinery,Ltd

NIPPON EXPRESS

Okuma Corporation

SAN-EI CO., LTD.

SANKYU INC

SUMITOMO NACCO MATERIALS

HANDLING CO.,Ltd

Tokyo Electron Kyushu Limited

TOSHIBA MACHINE CO.,LTD.

ULVAC,Inc.

West Japan Railway Company

Yamazaki Mazak Corporatio

EAGLE, the Originator of Toe-Lift Jacks

The very first Toe-Lift Jack was brought to the market by EAGLE in 1976. Before the Toe-Lift Jack, only jacks available were portable hydraulic jacks, but they had not been able to meet the field workers demand for a jack to fit in a small gap at low positions. EAGLE took up the demand and successfully developed its first Toe-Lift Jack. Since then, EAGLE has been releasing its new family products such as Toe-Lift Jacks with Slide Table and Power Wedge, etc. to swiftly respond and shape new field demand for improvement and new functions of its Toe-Lift Jacks.

Highest Reliability

EAGLE places three priorities in its technological investment, **1** robustness and durability, **2** user oriented product design, and **3** high quality material and solid manufacturing technology. More than 35 years of experiences and lessons learned in responding Japanese customers' highest demand in heavy machinery movement field are reflected in EAGLE's products line.

1 Robustness and Durability

EAGLE has been pursuing robustness and durability in its products in order to satisfy the customers' need for moving and placing high value added large scale precision machinery. Its R&D effort for robustness and durability bear fruits of its own technology such as high tension steel based integral structure and safety valve mechanism for robustness, and high durability internal structure of hydraulic cylinder.

EAGLE's R&D organization has been achieving high performance goals through its design using its most advanced 3-D CAD and structural analytical system as well as its actual products test using its originally developed repetitive durability test machine.

2 User Oriented Product Design

EAGLE's products development always goes with its users. Its sales staff visit customers' operational sites, directly listen to local users voices and reflect them in its products improvements. This user oriented product design posture is no exception for the design of accessories, which generally tend to be low priority area for product improvement. For example, EAGLE improved the lever handle of its jack products for higher stiffness to satisfy users' need for easy handling and work efficiency.

3 High Quality Material and Solid Manufacturing Technology

For its main part that requires full strength, EAGLE adopts Japan's renowned highest quality steel material. And then, its proficient manufacturing staff with high skill attains highest quality in their parts processing and welding assembly by skillful operations of robots and NC machines.

By making most use of Japan's "Mono Tsukuri (high quality product manufacturing)" concept that consists of manufacturing technology, craftsmen's skill and quality control system, EAGLE is providing products with highest running cost performance and reliability.



Demanded Functions

EAGLE listens to new demand in the fields and develops new functions to be added to EAGLE's products family.

Remote Toe-Lift Jacks that enable safe operations

These jacks are optimized for the use in a small and confined space where regular jack operation is difficult. Since it can be remotely operated, higher safety is ensured. There are several types of specification depending on operational conditions, and therefore, customers are required to purchase jack's main body and its Hand Pumps separately.

Toe-Lift Jacks with Slide Table that enable forward/backward position adjustment

These Toe-Lift Jacks are optimized for movement of a large system like a printing system that connects multiple units. Since these jacks enable strict placement adjustment at a jack-up position, they greatly improve work efficiency. One family product of this type enables forward/backward adjustment while another family product with roller attached to it enables both forward/backward and left/right adjustment at your discretion. Depending on your usage, mostly optimized product can be chosen.

Power Wedge that greatly improves efficiency of pushing work and lifting work

Power Wedge can slide a heavy item up to the wall.

Power Wedge can lift equipment directly placed on the floor up to a height where Toe-Lift Jack can be operated. Unlike using a bar, Power Wedge should not cause any damage on the floor, and ensures safe and swift work.

Push work

The cover plate should be removed during its operation




Unlike a pushing work using a bar, it enables smart sliding work without causing any damage on the floor.

Since this Power Wedge operation does not require counterforce receiver, total work efficiency is greatly improved.

Lift work

The cover plate is placed over the toe. The leading edge toe part of the cover plate is inserted in a narrow gap.

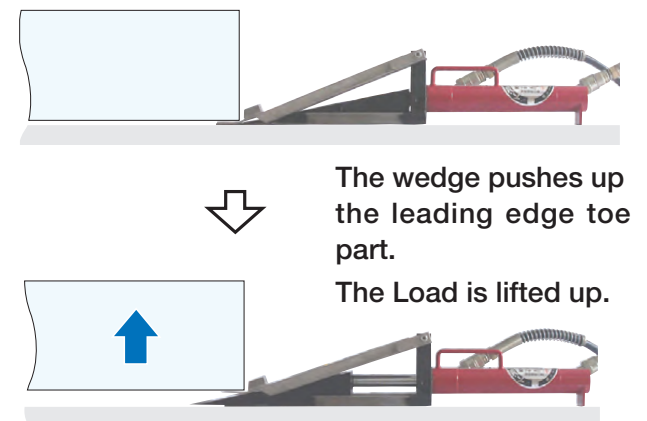

This Power Wedge can find a gap as low as 6mm and then lift up the load from there up to as high as 34mm, where a regular jack-up operation can be done.

Its double acting cylinders enable fine adjustment during a lowering operation and therefore, it ensures operational safety.

EAGLE's approach to highest work safety

Remote Toe-Lift Jack + Hand Pump



How safe are you in jacking a machine that is positioned unstably?

Before

Conventional jacks require their operators to do jack-up operations right beside the machines to be jacked. If the machines are positioned unstably, there is a risk that they might fall down during jack-up operation.

After

EAGLE's Remote Toe-Lift Jack + Hand Pump enable its operator to remotely operate the jack-up from safe place. For a lowering operation, an operator can directly grab control valve and therefore, it can ensure to lower the load slowly and safely.

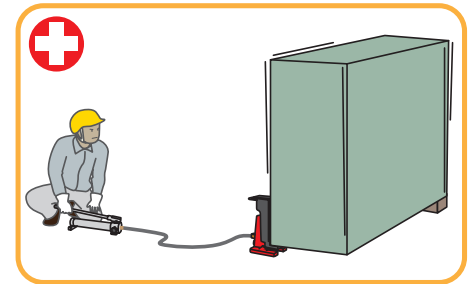



How safe are you in jacking in a small and confined space?

Before

In case of a conventional jack-up operation in a small and confined space, there are a lot of safety risks because it is quite difficult for its operator to escape from the spot.

After

EAGLE's Remote Toe-Lift Jack + Hand Pump enable its operator to operate the jack-up from outside the pit and therefore, it is much safer and easier.

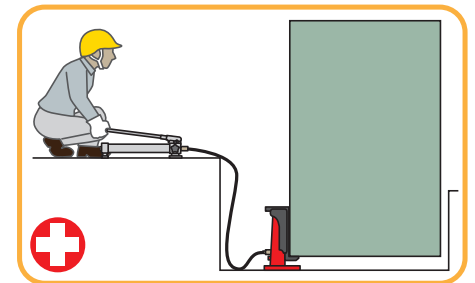

EAGLE's approach to highest work safety

Power Wedge



How safe are you in doing fine adjustment of a machine placement position?

Before

Fine adjustment work by a bar tends to cause counterforce, which could throw its operator away and hurt it.

After

EAGLE's Power Wedge ensures operational safety because its operator can do the fine adjustment by only controlling its external pump.

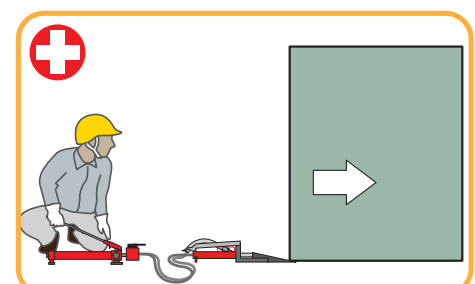

EAGLE's approach to highest work quality

Power Wedge



How smart are you in doing fine adjustment of a machine placement position?

Before

Fine adjustment work by a bar tends to cause some damage on the floor. It is also difficult to achieve precise positioning on a right spot.

After

EAGLE's Power Wedge can do the job without any damage on the floor, while it can adjust the position on a millimeter basis.

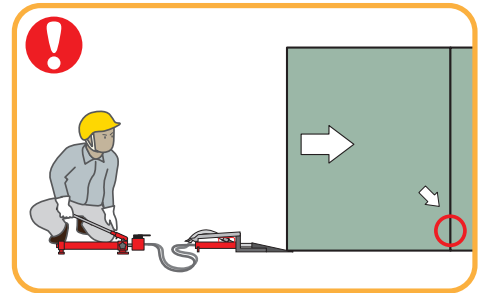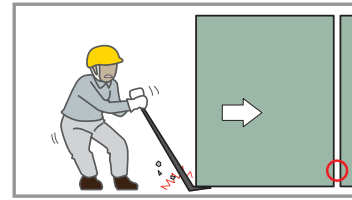

EAGLE's approach to highest work quality

Toe-Lift Jack with Slide Table



How smart are you in doing machine assembly (integration of multiple units)?

Before

Conventional machine assembly work by jacks and rollers requires multiple jack-up and jack-down operations for all the units to reach final position for assembly. It has high risk of damaging machines and the floor. It is also time consuming.

After

EAGLE's Toe-Lift Jack with Slide Table can do the job extremely simply and accurately. It is friendly to machines and the floor, and does not take much time.

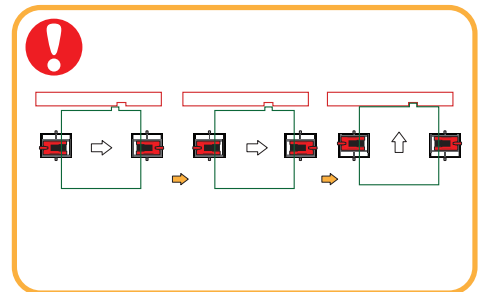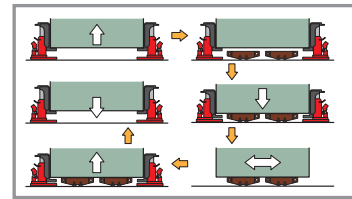

EAGLE's approach to highest work quality

Remote Toe-Lift Jacks + Hand Pump



How smart are you in jacking the load in two separate points simultaneously?

Before

With conventional jacks, two operators have to try to manually synchronize individual jack handling.

After

EAGLE's Remote Toe-Lift Jacks + Hand Pump enable one operator to operate the two jacks set in two separate positions in the total synchronization.

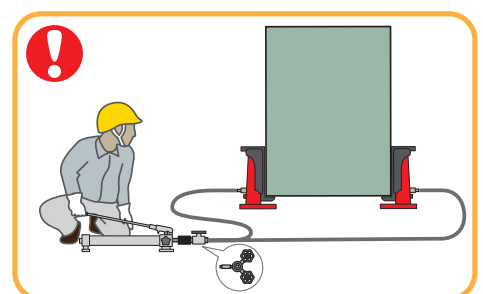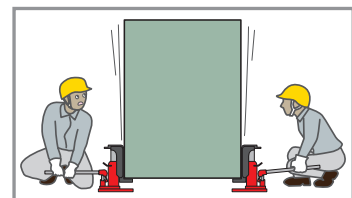

EAGLE's approach to highest speed

Remote Toe-Lift Jack + Hand Pump



How speedy are you in jacking through no-load path?

Before

In case there is a gap between the toe of the jack and the contact point of the machine where its load is incurred, conventional jacks' pump discharge speed is all the same regardless of the load, and therefore, it takes time to reach its load contact point.

After

EAGLE's Remote Type Toe-Lift Jack + Hand Pump have the two stage pump discharge, which enables the toe to reach its load contact point much faster and therefore, shortens its work time.

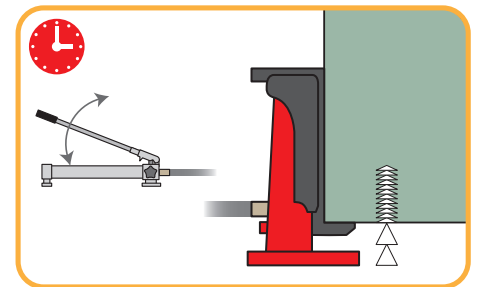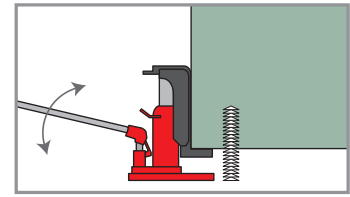

EAGLE's approach to highest speed

Power Wedge



How speedy are you in doing fine adjustment of machine placement position?

Before

When you slide a machine by pushing it laterally up to the wall by a conventional jack, you have to manage its counterforce by the other wall. Also, you may need something like iron block to fill the gap between the jack and the machine.

After

EAGLE's Power Wedge enables you to do this work without receiving its counterforce, and complete the task real quick.

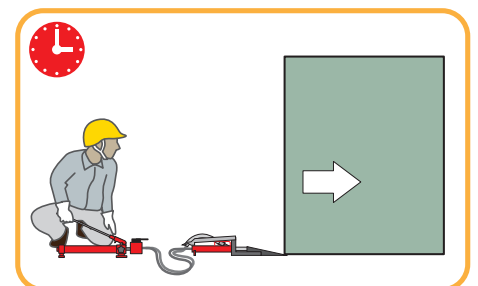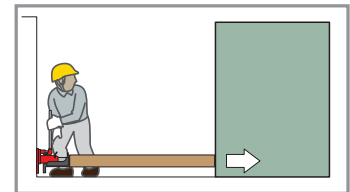

EAGLE's approach to highest speed

TERRA Rollers



How speedy are you in moving a machine on the floor?

Before

When you try to move machinery on the floor by a conventional jack, you have to place rollers and you have to do resetting the rollers one at a time depending on the distance you want to move it.

After

In case of TERRA Rollers, a machine can be fixed to it and therefore, once the first setting was made, the movement of the machine is done so efficiently.

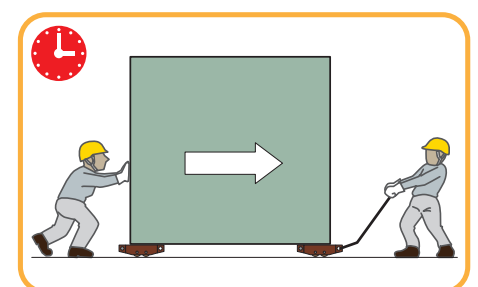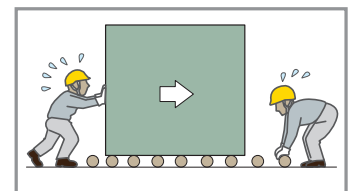

Products Catalogue

Toe-Lift Jacks

These are our Toe-Lift Jacks' standard G-series models, which are used by our customers most.

- They are equipped with a safety valve to prevent overload, enhancing work safety.
- The toe structural part from its head down to toe is cast from a mold without welding or bending process. Besides, it is made of high tension steel, which materializes great strength and durability.
- By making their toes' corners R shaped, it is reducing the risk of deformation or break by stress concentration.
- Their insertion sockets can rotate so that their operators can handle pumping at the best positions.
- They adopt "Two Rods Locked Type Handle with Grip", which is very easy to use.
- G-60&G-100 can be laid down for use.



G-60



G-100



G-200

	G-60	G-100	G-200
Toe capacity (ton)	3	5	10
Head capacity (ton)	6	10	20
Minimum toe height (mm)	19	22	28
Stroke (mm)	115	130	140
Minimum head height (mm)	233	288	333
Base width (mm)	155	183	230
Base length (mm)	236	262	300
Toe width (mm)	65	75	100
Toe length (mm)	50	55	60
Product weight (kg)	13	21	38

Products Catalogue

Remote Toe-Lift Jacks

"K-series" products are remotely controllable and highly maneuverable. They embodied the 3"S" approaches and they are the flag ship of EAGLE's Toe-Lift Jacks.

- These hydraulic jacks are connected with an external pump and a high pressure hose.
- Since their operators can operate them remotely, jack-up tasks in a small space or in a place where the foothold of a machine is unstable can be safely completed.
- They can lower themselves without any load and the speed to get down can be adjusted by controlling their valves.
- They can be operated with a small number of pumping.
- They can be laid on their side, tilted or placed upside down for their operations.
- Two jacks can be synchronized and controlled by one place.



K1-150S



K2-150S



K1-150S connected with a Hand Pump and High Pressure Hose

	K1-150S	K2-150S	K3-125S	K5-150S
Toe capacity (ton)	5	10	15	25
Head capacity (ton)	10	20	30	50
Minimum toe height (mm)	22	28	32	38
Stroke (mm)	150	150	125	154
Minimum head height (mm)	343	349	329	363
Base width (mm)	180	224	272	353
Base length (mm)	200	257	290	320
Toe width (mm)	75	100	125	150
Toe length (mm)	55	55	60	70
Product weight (kg)	24	44	57	97
Oil required (cc)	218	498	553	1104

Products Catalogue

Hand Pumps

These are hand pumps to drive EAGLE's various Remote Toe-Lift Jacks.

- They are optimized for Remote Toe-Lift Jacks and for Super Low Floor Cylinder Jack.
- They have a double cylinder discharge mechanism (automatic switching between high pressure and low pressure) so that their jack strokes widths are widened when their pressures are low or none to shorten their work time.
- Our 2V series Double Pumps enable a synchronized operation of two jacks by equipping its branch with the automatic adjustment valve.
- These Hand Pumps can be used for other suppliers' jacks.



AKB-08S



AKB-08S-2V
(Two point lifting)



K-18S



K-18S-2V

	AKB-08S	AKB-08S-2V	K-18S	K-18S-2V
Pressure rating 1 stage (MPa)	70	70	70	70
Pressure rating 2 stage (MPa)	1.4	1.4	2.5	2.5
Usable oil capacity (cc)	800	800	1800	1800
Oil volume per stroke 1 stage (cc)	2	2	2.5	2.5
Oil volume per stroke 2 stage (cc)	12.9	12.9	16.3	16.3
Product length with handle (mm)	640	818	680	860
Product weight (kg)	6	8	14	17

Products Catalogue


Toe-Lift Jacks with Slide Table

They enable forward/backward position adjustment while keeping heavy load in a jacked position.

- EAGLE's Toe-Lift Jacks are assembled individually to a slide table consisting of ball bearings.
- They enable fine position adjustment of forward/backward and up/down within the range of 100mm.
- Slide Table is integrated with the jack through its ant ditch guide causing no left/right slight shifting.
- The same specification as the G-series is applied to these jacks.



F-100TL




Slide Table with Roller

This model enables you to handle fine position adjustment in any of the three directions.

- This model consists of an F-series jack and wheels that are made of urethane, enabling fine position adjustment in three directions, forward/backward, left/right and up/down while keeping the load in a jacked position.



FR-100TL



	F-100TL	F-200TL	FR-100TL
Toe capacity (ton)	5	10	5
Minimum toe height (mm)	44	51	50
Jack stroke (mm)	62	52	62
Minimum head height (mm)	243	268	252
Slide table width (mm)	226	270	373
Slide table length (mm)	413	451	443
(forward/backward) Slide stroke (mm)	100	100	100
Toe width (mm)	75	100	75
Toe length (mm)	75	80	75
Product weight (kg)	32	50	39
Attached	Ratchet handle×1 / Jack lever×1		

Products Catalogue

Power Wedge

This cool model enables both sliding heavy load laterally and widening a slight gap for toe-lift jack.

- This is a hydraulic tool to greatly enhance work efficiency to move heavy items.
- It can handle both lateral pushing and lifting.


Pushing work

Unlike using a bar, Power Wedge does not cause any damage on the floor. Since it does not need to manage counterforce, pushing works are greatly efficient.



Lifting work

Power Wedge can work with a gap as small as 6mm, and lift and widen it up to 34mm in which a Toe-Lift Jack's toe can be inserted. This product has double cylinders and therefore, it enables fine adjustment during its lowering operation and it is so safe.

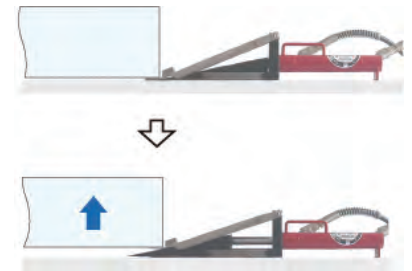

KP-35

Jack unit	KP-15	KP-35
Capacity (ton)	15	30
Minimum height (mm)	6	6
Maximum height (mm)	34	34
Gross weight (kg)	30	35

Products Catalogue

Short Cylinder Jack

Uniquely designed to match the heights of the EAGLE Rollers.

- This model is optimized to change directions of EAGLE Rollers during their heavy load carriage task or to lift machinery for maintenance and placement of it.
- This is a remote operation type short cylinder jack, which is operated by a hand pump connected to it.
- With its internal spring mechanism, its rams can be stored even if there is no load.



CJ2-50



CJ3-50



	CJ2-50	CJ3-50
Capacity (ton)	20	30
Stroke (mm)	50	50
Minimum height (mm)	95	95
Outside diameter (mm)	88	105
Product weight (kg)	3.5	5
Oil required	152	233

Products Catalogue


TERRA ROLLER

TERRA ROLLER enable smooth carriage and transportation of heavy items.


- They adopt urethane wheels, which have excellent durability and prevent any damage on the floor.
- 3models ofTERRA ROLLER adopt urethane wheels of the same type and have the same product height regardless of different capacities.
- This same wheel design can save purchasing cost of consumable urethane wheels.



ERA-50:5ton

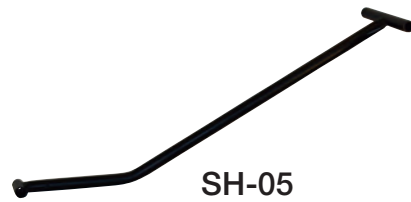

SH-05

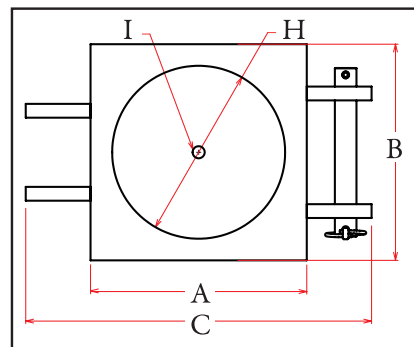

		ERA-25	ERA-50	ERA-100
Capacity (ton)		2.5	5	10
Frameheight (mm)		113	113	113
Frame	A (mm)	250	250	300
	B (mm)	136	250	365
	C (mm)	400	400	450
	H(ϕ)	125	200	200
Turn table	I	M16	M16	M16
	Pcs	2	4	8
Roller	diameter(ϕ)	85	85	85
	Wide (mm)	95	95	95
Weight (kg)		15	26	43
Exclusive handle		SH-05		

New Rollers for heavy Load Moving

TERRA ROLLER



Heavy loads such as machinery can be moved safely and quickly.



Head Office & Tokyo Factory

1-22-4 Ogi Adachi-ku, Tokyo, 123-0873 Japan

Osaka Marketing Center

3-4-17 Nagata Joto-ku, Osaka-shi, Osaka, 536-0022 Japan

Fukushima Factory

154-5 Kitahara-Kogyodanchi shinchi-cho, Soma-gun, Fukushima, 979-2700 Japan



<http://english.eagle-jack.jp/>