

Advantix bathroom drain
Instructions for Use



Model
4926

Year built:
from 01/2003

en_INT

viega

Table of contents

1	About this instruction for use	4
1.1	Target groups	4
1.2	Labelling of notes	4
1.3	About this translated version	5
2	Product information	6
2.1	Intended use	6
2.1.1	Areas of use	6
2.1.2	Media	6
2.1.3	Drainage capacity	6
2.2	Product description	7
2.2.1	Overview	7
2.2.2	Technical data	7
2.3	Information for use	7
2.3.1	Installation variations	7
2.3.2	Sealing	8
2.4	Required accessories	12
3	Handling	14
3.1	Assembly information	14
3.1.1	Important note	14
3.1.2	Installation dimensions	14
3.1.3	Tools and materials	14
3.2	Assembly	15
3.2.1	Connecting the drain	15
3.2.2	Prepare for subsequent work	15
3.2.3	Sealing the drain	16
3.2.4	Mounting the top	19
3.3	Maintenance	20
3.3.1	Maintenance tips	20
3.3.2	Cleaning the drain	20
3.4	Disposal	21

1 About this instruction for use

Trade mark rights exist for this document, further information can be found at www.viega.com/legal-notice.

1.1 Target groups

The information in this instruction manual is directed at the following groups of people:

- Heating and sanitary professionals and trained personnel
- Tilers
- Consumers

It is not permitted for individuals without the abovementioned training or qualification to mount, install and, if required, service this product. This restriction does not extend to possible operating instructions.

The installation of Viega products must take place in accordance with the general rules of engineering and the Viega instructions for use.

1.2 Labelling of notes

Warning and advisory texts are set aside from the remainder of the text and are labelled with the relevant pictographs.



DANGER!

This symbol warns against possible life-threatening injury.



WARNING!

This symbol warns against possible serious injury.



CAUTION!

This symbol warns against possible injury.



NOTICE!

This symbol warns against possible damage to property.



Notes give you additional helpful tips.

1.3 About this translated version

This instruction for use contains important information about the choice of product or system, assembly and commissioning as well as intended use and, if required, maintenance measures. The information about the products, their properties and application technology are based on the current standards in Europe (e. g. EN) and/or in Germany (e. g. DIN/DVGW).

Some passages in the text may refer to technical codes in Europe/Germany. These should serve as recommendations in the absence of corresponding national regulations. The pertinent national laws, standards, regulations and guidelines, as well as other technical guidelines, have priority over German/European guidelines in this manual: The information is not binding for other countries and territories and should, as mentioned, be considered as support.

2 Product information

2.1 Intended use

2.1.1 Areas of use

The drain is designed for small to medium volumes of water, which occur in e. g. residential building.

Technical information, see [Chapter 2.2.2 'Technical data' on page 7](#).

The drain with vertical drain support is suitable for installation in drill holes and can be used in low floor construction heights from 20 mm to 105 mm.


2.1.2 Media

The drain is intended to be in constant operation for the channelling off of typical household wastewater in acc. with DIN 1986-3.

- The short-term temperature of the wastewater may reach up to 95° C. The temperature must be considerably lower in constant operation.
- The pH value must be higher than 4 but lower than 10.

It is not permitted to introduce wastewater which would damage the product material.

2.1.3 Drainage capacity

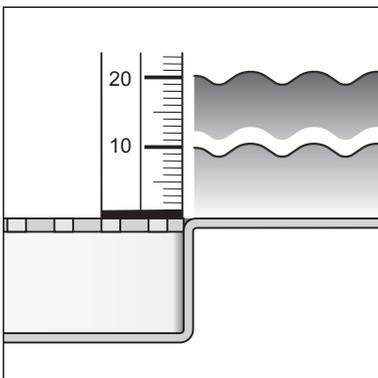


Drainage capacity at an accumulation height of 10 mm above the grate: 0.7 l/s

Drainage capacity at a water accumulation height of 20 mm above the grate: 0.9 l/s

The values are dependent on the total height (H) of the drain unit.

2.2 Product description

2.2.1 Overview

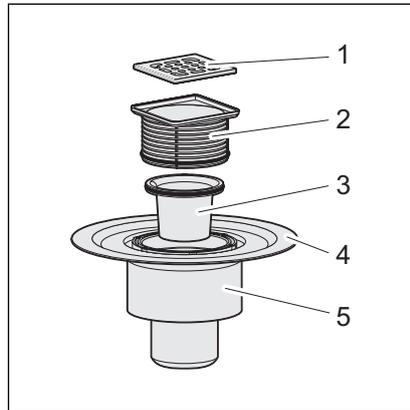

- 1 - grate
- 2 - top, can be cut to length
- 3 - removable odour trap
- 4 - flange for the application of the conventional sealing
- 5 - base unit

2.2.2 Technical data

Nominal width [DN] (drain support)	50
Drainage capacity	↪ Chapter 2.1.3 'Drainage capacity' on page 6
Dimensions and installation height	↪ Chapter 3.1.2 'Installation dimensions' on page 14
Water head seal	50 mm
Load class	K = 300 kg

2.3 Information for use

2.3.1 Installation variations

Mounting in a bare concrete floor

The mounting of the drain in a bare concrete floor is as follows:

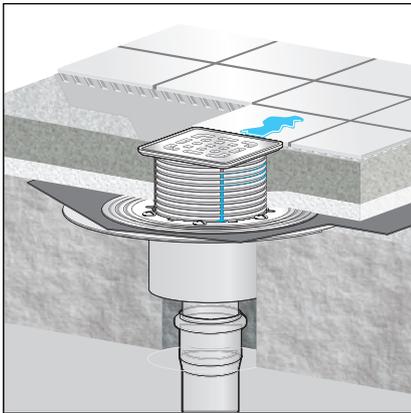


Fig. 1: General mounting example – Drill hole

- The drain is placed over a ceiling lead-in (e. g. of a drill hole), through which the drain pipe is led.



NOTICE!

The creation of a floor recess must be agreed with the following people:

- a structural engineer
- the on-site fire protection inspector or the specialist engineer for fire protection

If necessary, proof of compliance with building code or an expert's report must exist.

2.3.2 Sealing

The drain can be sealed both conventionally as well as with bonded sealing.

Depending on the type of sealing, you will require the relevant equipment set ↪ *Chapter 2.4 'Required accessories' on page 12.*

Conventional sealing

The flange of the drain is intended for conventional sealing. To be able to seal the drain conventionally, you require a suitable sealing cuff and a clamping ring with which the cuff is secured ↪ *Chapter 2.4 'Required accessories' on page 12.*

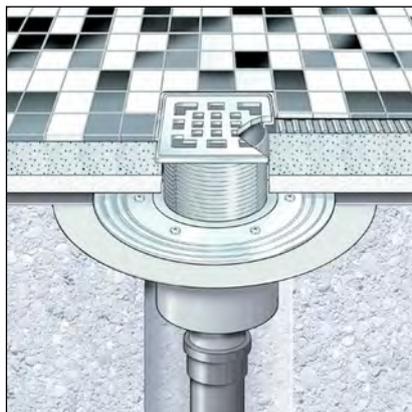


Fig. 2: Construction diagram of a conventional sealing



NOTICE! Not suitable for floor-level showers

Conventional sealing is not recommended with floor-level showers, because dampness can enter the screed and damp proof layer.

The bonded sealing should be used in the case of floor-level showers.

Principle

Conventional sealing occurs with sealing lanes made of bitumen or EPDM. The sealing lanes are laid directly onto the bare concrete or heat insulation. This process has proved itself to be particularly effective for sealing balconies, patios, floor panels and cellar floors. In addition, sealing lanes are often used as an additional second sealing layer below the bonded seal.

The following components are required for the installation of a drain with conventional sealing:

- Drain
- Clamping ring with sealing cuff for EPDM and bitumen sealing lane

Information for processing

The sealing cuff is coated differently on both sides: EPDM/ Bitumen

The sealing cuff is placed on the drain and secured using the flange ring. It depends on the sealing lane used which material layer of the sealing cuff is placed upwards. You can find more information in the instruction manual of the sealing flange.

Bonded sealing

To protect against dampness, sealing foils which are to be processed as liquids are applied directly below the tiles on screed and walls. The provisions of the wear class, of the foundation and the choice of suitable bonded sealing must be carried out in acc. with ZBD data sheet 1/2010 and in acc. with the guideline for bonded sealing (BS).

Bonded sealing can be carried out with the help of a suitable stacking element. You have the possibility to double seal, using conventional and bonded sealing or only using bonded sealing.

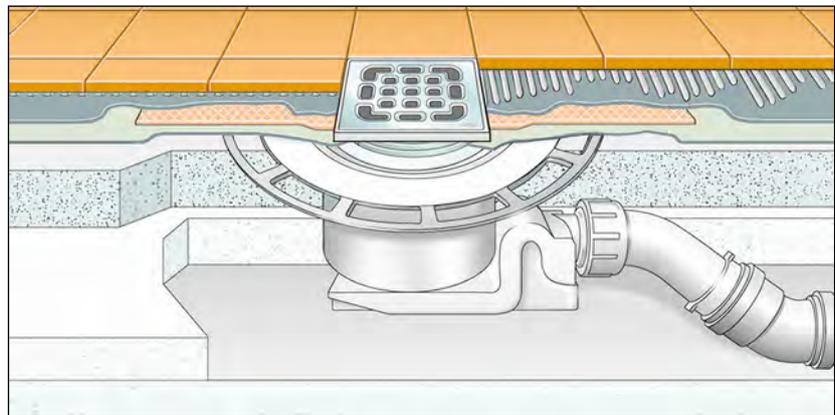


Fig. 3: Diagram of a bonded seal

Important note

Careful planning is required for professional sealing. In addition, depending on the individual dampness wear class and the type of foundation, a suitable BS system with a building regulations certificate of suitability must be chosen.

Furthermore, the following factors should be taken into account:

- Drain or shower channel must be equipped with a special flange, which has an adhesive surface and a width of at least 30 mm
- To enable the material change from drain to screed, either a suitable sealing cuff or sealing strip, which is designed for overlapping with the BS with a width of at least 50 mm must be used.
- The screed must be laid at a minimum incline of 1–2 %.
- The installation must be carried out properly in acc. with the installation manual and the manufacturer's information.

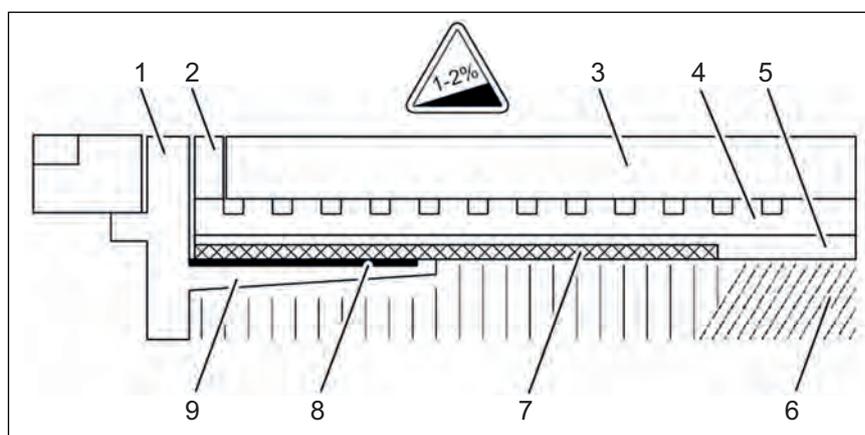


Fig. 4: Construction diagram of the bonded seal - min. screed incline 1–2 %

- 1 - grate
- 2 - top piece with adhesive flange
- 3 - tile
- 4 - tile adhesive
- 5 - bonded sealing
- 6 - screed
- 7 - sealing cuff
- 8 - mat
- 9 - adhesive flange

Permitted bonded seals


Only approved bonded seals with proof of practicability in keeping with building law may be used with suitable drains, e. g.:

- for the wear classes A and AO:
in accordance with ETAG 022 T1
- for the wear classes A, B and C:
in accordance with DiBt Rule list A, Part 2 of the DiBt and the test principles for bonded sealing (PG AIV-F)
- in acc. with DIN EN 14891:
"Liquid-applied impermeable products for use below ceramic tiling bonded with adhesives"

Information regarding the procedure can be found in the instructions for use of the corresponding product.


2.4 Required accessories

Top

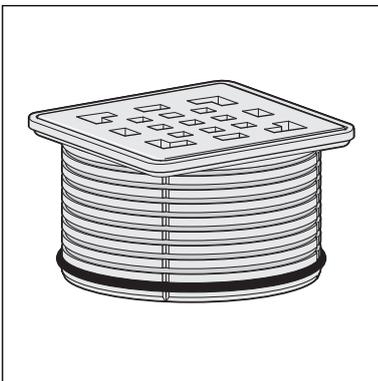


Advantix tops are available in a number of sizes and variations. You can also only buy an Advantix top frame and then purchase a suitable designer grate separately (see catalogue).

Sieve insert

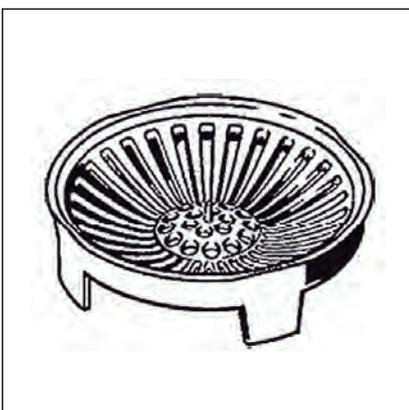

The drain can be fitted with a sieve insert (model 4958) to collect dirt.


Accessories for the conventional sealing

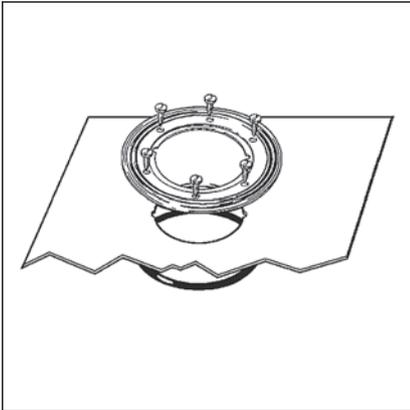

If a conventional sealing is to be made, a suitable sealing collar and a clamping ring will be required.

You will find a corresponding set in the catalogue (model 4948.31).


Accessories for the bonded sealing

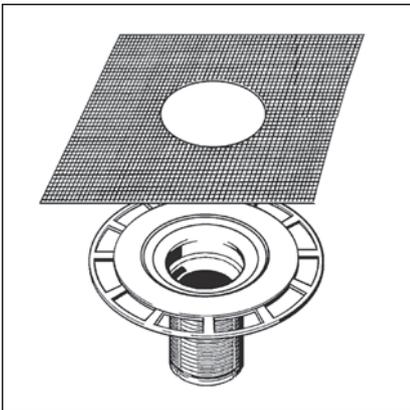

If a bonded sealing is to be applied, a suitable stacking element with sealing collar is required.

You will find a corresponding set in the catalogue (model 4925).

Odour barrier

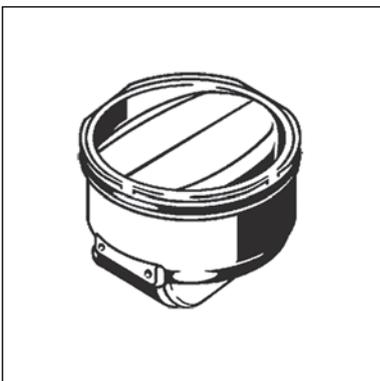

Advantix drains can be equipped with an additional odour barrier, which also closes the drain odour-tight, if the water seal in the odour trap has evaporated. Odour nuisance is even avoided with drains that are only seldom used. Odour barriers can be found in the catalogue.

3 Handling

3.1 Assembly information

3.1.1 Important note

Before assembly:

- check if the drainage capacity of the drain is sufficient for the arising water volume ↪ *Chapter 2.1.3 'Drainage capacity' on page 6*
- check if the installation height of the drain corresponds with the planned floor construction
- ensure that the required connection line is installed with the necessary incline to the planned installation location
- if necessary, supply the required accessories ↪ *Chapter 2.4 'Required accessories' on page 12*

During assembly:

- observe installation dimensions
- decide whether or not a backflow seal is required in the insertion part of the top

After assembly:

- the drain flange must be fully lined with mortar

3.1.2 Installation dimensions

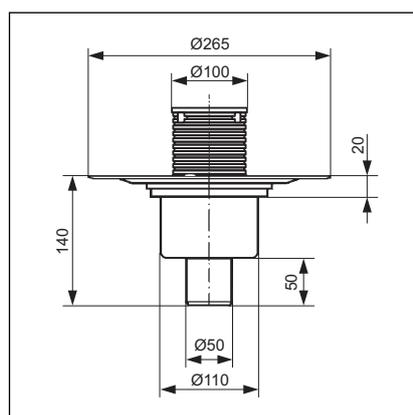


Fig. 5: Dimensional drawing model 4926

3.1.3 Tools and materials

Required material

- if necessary, sealing cuff, clamping ring, fitting screws
- Top with grate, if not included in scope of delivery ↪ *Chapter 2.2.1 'Overview' on page 7*

- if necessary, stacking element for bonded sealing model 4925
- Material for securing the drain

3.2 Assembly


3.2.1 Connecting the drain

Connecting to the wastewater system

The connection to the wastewater system must be completed before the drain can be installed in the floor construction. Proceed as follows:

Requirements:

- A pipe to the planned drainage position is already in place for the connection to the waste water system.
- The drainpipe has an internal sealing lip.
- Push the drain support into the drainpipe completely.

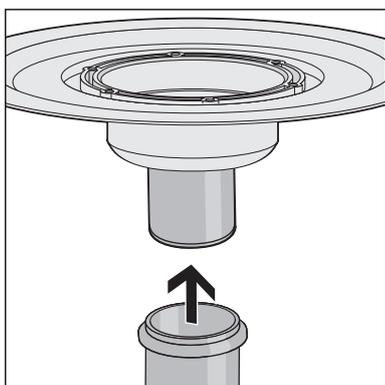


3.2.2 Prepare for subsequent work

A few points must be observed to integrate the drain into the floor construction properly. For this reason, proceed as follows to prepare the drain for subsequent work:

Requirements:

- The drain is connected.
- Position the drain at the desired height at the place of use. Depending on planning, the drain can be integrated into concrete, screed or a heat insulation layer, for example. It is important that the upper edge of the drain flange is flush with the upper edge of the sealing layer. If necessary, raise or lower the drain in the existing floor using suitable material.
- Align drain horizontally using a spirit level.
- Secure the drain in such a way that it cannot shift when the subsequent works are applied.

Most importantly, it must be ensured that the drain does not float when the concrete or screed is poured in.

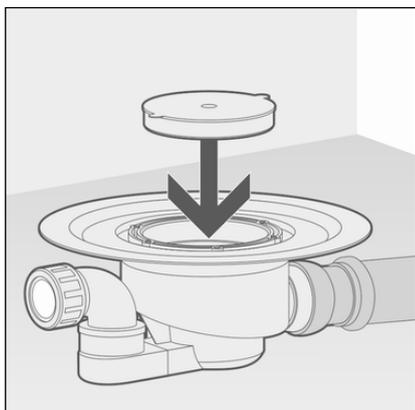

- Insert yellow protective plugs.



NOTICE!
Product damage due to improper installation

If hollow spaces occur during the lining of the drain, leaks may occur when pressure is applied.

Inform the subsequent workers that the drain must be fully lined and that there must be no hollow spaces.

3.2.3 Sealing the drain



NOTICE!
Product damage due to improper installation

If hollow spaces occur during the lining of the drain, leaks may occur when pressure is applied.

Check the proper completion of the subsequent work.




Screed and floor tiles must be laid at an incline of 1–2 % in the direction of the drain.

Conventional sealing


Requirements:

- A suitable sealing collar and a clamping ring are available.
- The flange is free of heavy soil.
- The complete surface of the flange is lined with material and undamaged.
- If required, clean the flange of heavy soil (e. g. from screed).

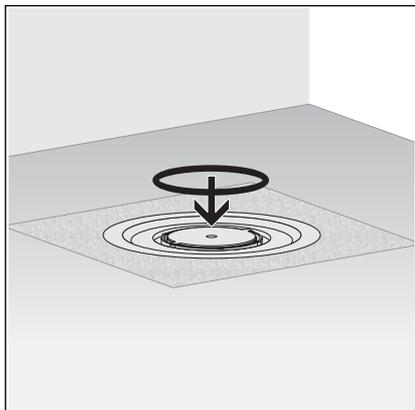

- Insert sealing ring.

The sealing ring must lie in the groove between the flange and the screw holes.

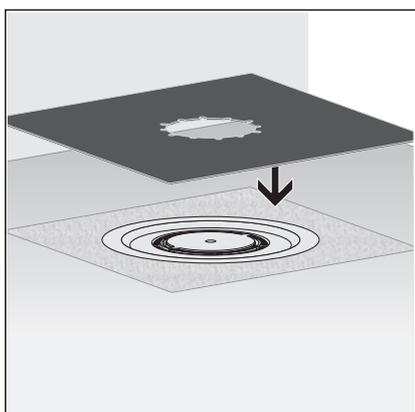


- INFO!** The Viega sealing collar has two differently coated sides. One side is coated with bitumen and the other with EPDM. If the additional sealing takes place with bitumen lanes, the sealing collar must be used with the bitumen side facing upwards. If EPDM lanes are used, the EPDM side must face upwards.

- Position the sealing collar on the drain.

The screw holes must be visible through the recesses.



- Position the clamping flange on the sealing collar in such a way that the screw holes are visible.

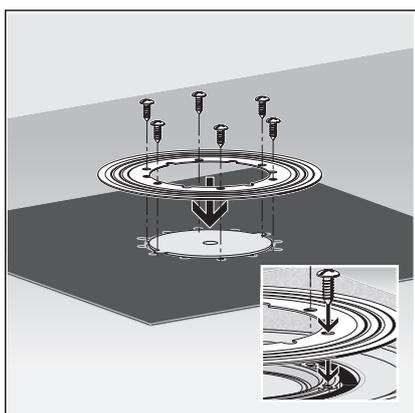

- Screw the clamping flange together tightly with the drain.


The fixing screws of the clamping ring may only be screwed into the screw holes of the drain.

- ⇒ The drain is sealed and the remaining sealing lanes can be laid.

Bonded sealing


Requirements:

- The flange is free of heavy soil.
- The complete surface of the flange is lined with material and undamaged.
- Remove protective foil.

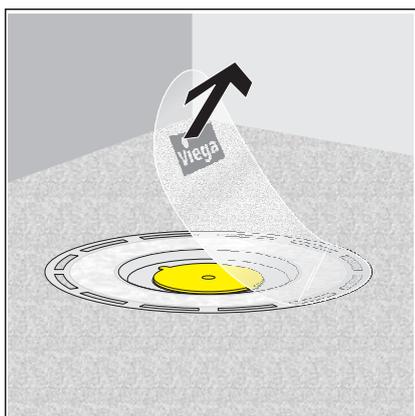

- Apply liquid foil onto the dry screed and spread onto the internal edge of the flange tile.

NOTICE! Observe the liquid foil manufacturer's instructions for use.

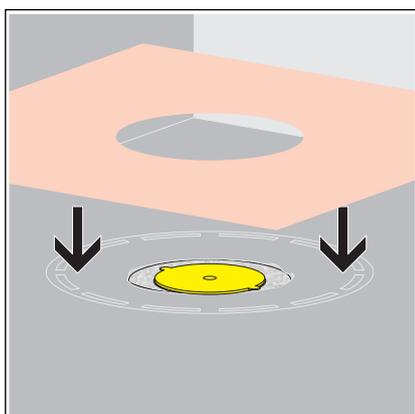


- Lay the sealing collar into the liquid foil.




- Apply second layer of liquid foil onto the sealing collar and, if necessary, onto the floor.

3.2.4 Mounting the top

The top with the grate must still be mounted to finish off the mounting of the drain. Proceed as follows:

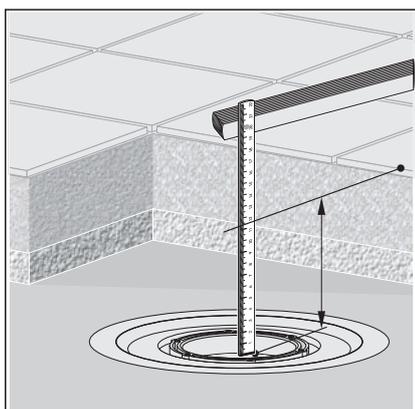


- Calculate the height of the floor construction from the edge in the inside of the drain up to the upper edge of the tiles.

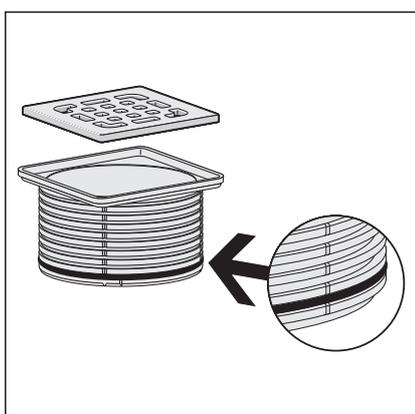

- Starting with the upper edge, transfer the measured height onto the top.
- Cut the top to the marked height.
- If necessary, insert backflow seal in the lowest notch of the top.

INFO! The backflow seal be must employed when no dampness is supposed to flow into the drain from outside of the top but water may seep in from below. Normally, no backflow seal is mounted so that water that occurs around the frame (e. g. due to a leaky silicone joint) can flow away. A backflow seal is mounted in the following cases:

- In the case of the risk of a build-up of water that can soak through the screed.
- During the mounting of a stacking element for the bonded sealing (see instructions for use of the stacking element).

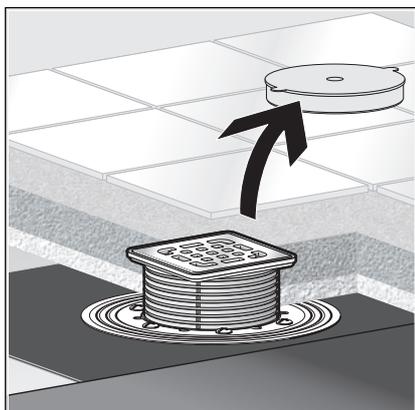

- Remove yellow protective plug.

- Place the top into the drain and align according to the tiles.
- Work the top into the screed or the floor covering.

3.3 Maintenance


3.3.1 Maintenance tips

Normal soap or a mild cleaning agent can be used for regular care and prevention of lime scale on the grate and frame. Under no circumstances should scouring agent or scratching objects be used.


Strong stains, even around the drain unit and the siphon, can be removed using typical household cleaner. It should be noted that the cleaning agent should be rinsed off after the prescribed soaking time. There should be no residue on the components.

3.3.2 Cleaning the drain


We recommend using a mild cleaning agent and a washing-up brush for cleaning.

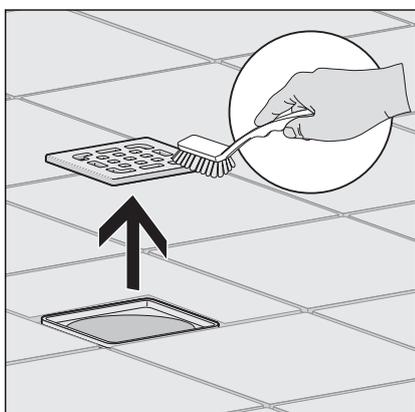

- Remove and clean grate.

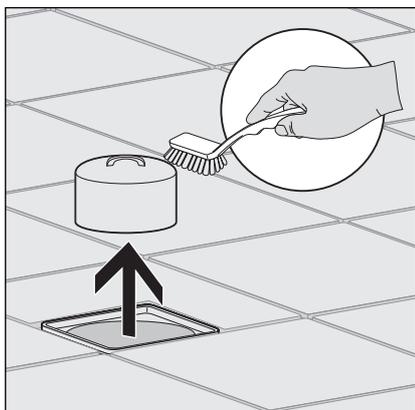

► Remove and clean odour trap.

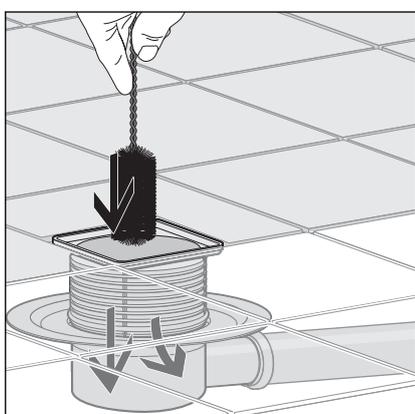

► Clean drain.

► Replace odour trap.

► Replace grate.

3.4 Disposal

Separate the product and packaging materials (e. g. paper, metal, plastic or non-ferrous metals) and dispose of in accordance with valid national legal requirements.