



PRODUCT CATALOGUE INSTRUMENT TRANSFORMER



CT INDOOR

TCI-24-2E



CTB-24




TCI-24-2D



Highest System Voltage	24 kV
Rated Primary Current	5 to 3200 A
Rated Short-time Thermal Current	Up to 50kA/3s (Depend on Rated Primary Current, Accuracy Class & Burden)
Accuracy Class	Measurement : 0.2S, 0.2, 0.5S, 0.5, 1, 0.5FS5, 0.5FS10 Protection : 10P10, 5P10, 5P15, 5P20, PX
Rated Burden	Up to 30 VA Outputs higher than 40VA are available upon request

RING CT

RCT-1L2

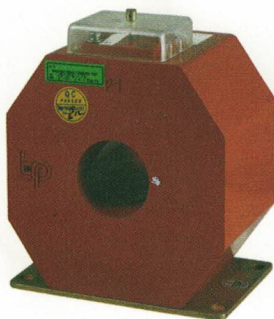

ZTA-1B



BCT Oil



Highest System Voltage	0.72 kV up to 1.2 kV
Rated Primary Current	50 to 1250 A (BCT Oil up to 5000A)
Accuracy Class	Measurement: 0.2S, 0.2, 0.5S, 0.5, 1, 0.5FS5, 0.5FS10 Protection : 10P10, 5P10, 5P15, 5P20, PX
Rated Burden	Up to 30 VA Output higher than 40 VA available upon request

VT INDOOR

VTB-24



VTI -24-2




VT-24A



VTI-24-4



VT-24F

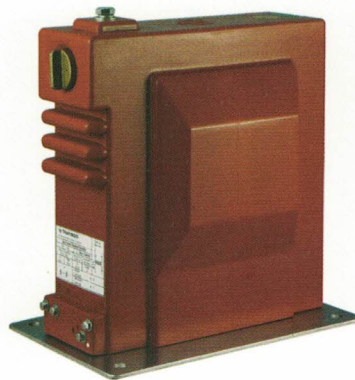

VT-24-2B1S



Highest System Voltage	24 kV
Rated Primary Current	Up to $22.9/\sqrt{3}$ kV (22.9 kV for VT-24-2B1S/2S)
Rated Voltage Factor	Up to 1.9 Un/8Hr
Accuracy Class	Measurement: 0,2 - 0,5 - 1,0 Protection : 3P; 6P
Rated Burden	Up to 100 VA

VT OUTDOOR

VT24 (0) 1B1S/2S




2VTO - 24



Highest System Voltage	24 kV
Rated Primary Voltage	up to 22.9 kV/√3 kV (22.9 kV for 2VTO-24)
Rated Voltage Factor	Up to 1.9 Un/8Hr
Accuracy Class	Measurement: 0,2 - 0,5 - 1,0 Protection: 3P; 6P
Rated Burden	Up to 100 VA for VT24 (0) 1B1S/2S Up to 500 VA for 2VTO - 24

CT OUTDOOR

CT-24(0)-1C1R/1C2R/
2C1R/2C2R

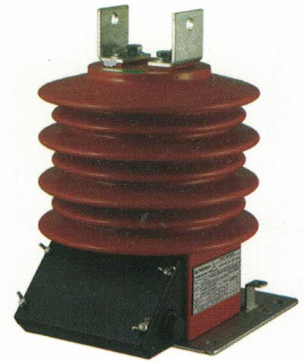

Highest System Voltage	24 kV
Rated Primary Current	10 to 600 A
Rated Short Thermal Current (I _{th})	Up to 25kA/1s Depend on Rated Primary Current, Accuracy Class and Burden
Accuracy Class	0.2S - 0.2 - 0.5S - 0.5 5P10; 5P20
Rated Burden	up to 30 VA

OTHER PRODUCTS


CTB-24-B2



TCI-24-4B



Dry Type

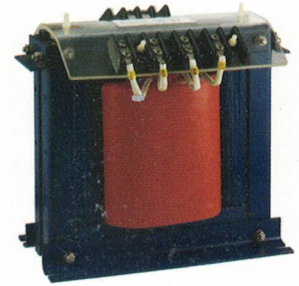

TCI-24-4C




VTB-12




VTB-24-2



RCT-1A3

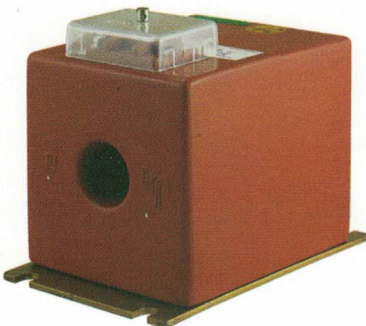

VTB-12F

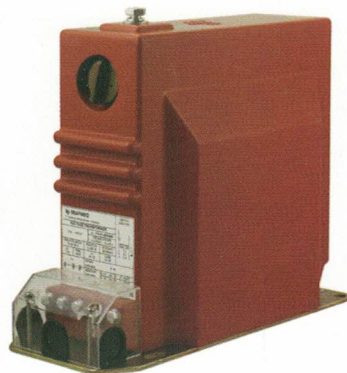

CTB-24-2A

