
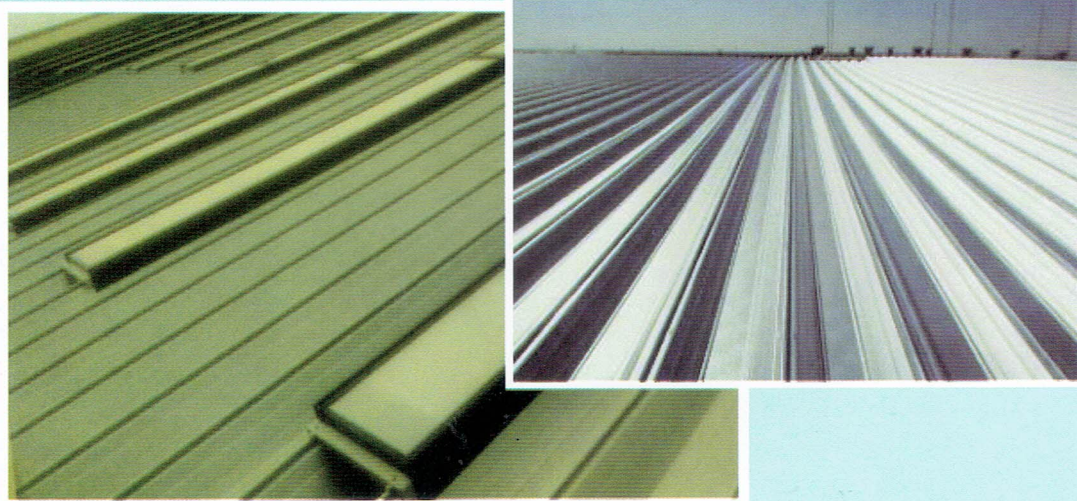


SF-750 adalah produk atap yang memiliki profil gelombang lebar yang ekonomis untuk bentang panjang tanpa sambungan dengan cara pemasangan boltless menggunakan sistem **seaming**.


SF-750 is a roof product that has an economical wide wave profile for connuous long spans by way of of boltless uses **seaming** mounng system.

Profil gelombang/Wave profile (mm):

SF-750

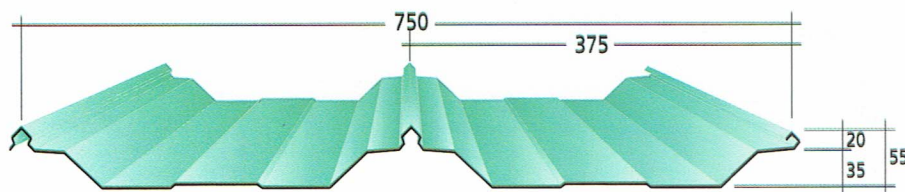

Pemasangan/Installation:

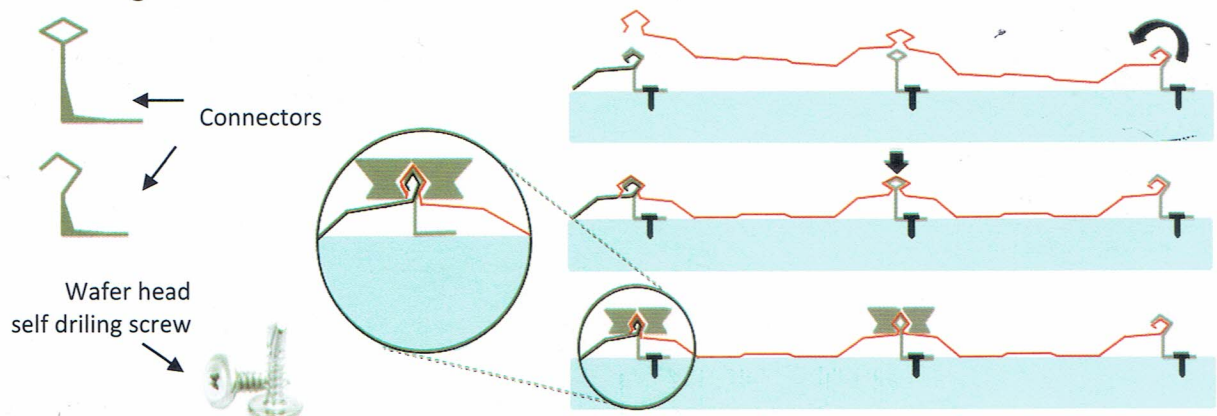

Keunggulan SF-750:

1. Rancangan profil gelombang lebar yang ekonomis.
2. Bebas lubang dan anti bocor dengan pemasangan sistem **seaming**.
3. Mudah dalam pemasangannya.
4. Kapasitas tampung curah hujan hingga 300 mm/jam.

SF-750 advantages:

1. Economical wide wave profile design.
2. Non-mounting hole and leakage proof **seaming** installation system.
3. Easy in installation.
4. Rainfall withhold capacity up to 300 mm/hr.

Spesifikasi produk/Product specification:

Base material coating	Zinc, Galvalume
Base material width (mm)	914
Total Coating Thickness (mm)	0.45, 0.60, 0.80
Color coating	ColorCoat, ColorFresh, ColorGrip
Maximum length (m)	Upon request
Maximum purlin distance (m)	2.5

Sifat penampang/Sectional properties:

Thickness (mm)		Unit weight		Momen of Inertia
Nominal	Total coating	kg/m	kg/m ²	I (cm ⁴ /m)
0.45	0.50	3.39	4.52	18.79
0.60	0.65	4.48	5.97	20.67
0.80	0.85	5.92	7.89	24.74

Gambar kapasitas beban/Load capacity graph:

