




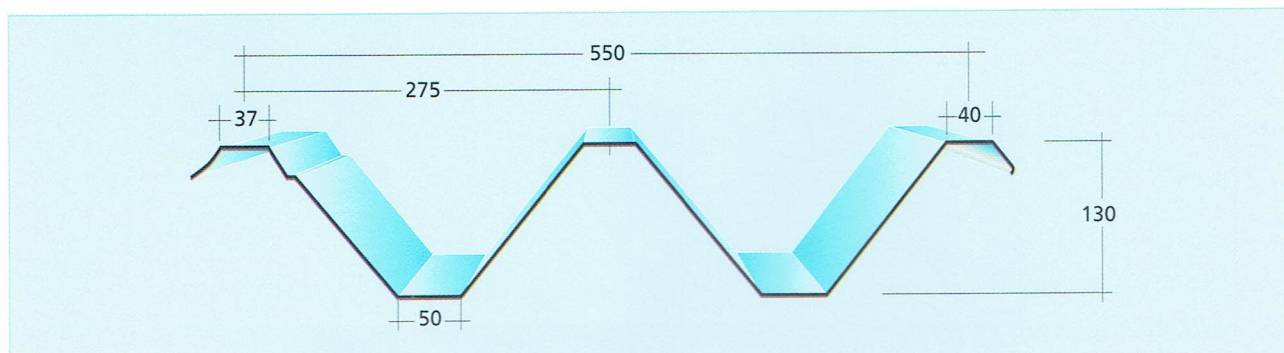

CONTINUOUS SUPPORT & CANTILEVER SUPPORT

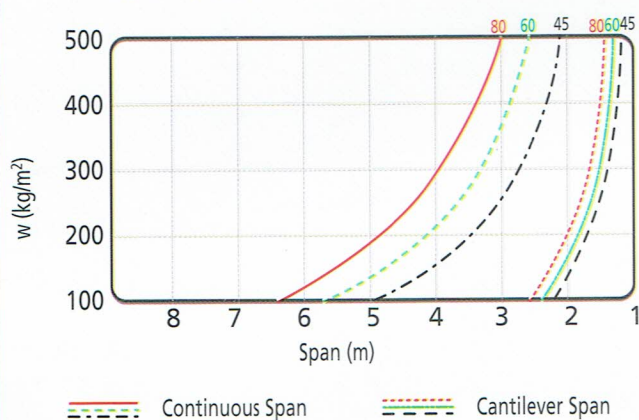

SIMPLE SUPPORT

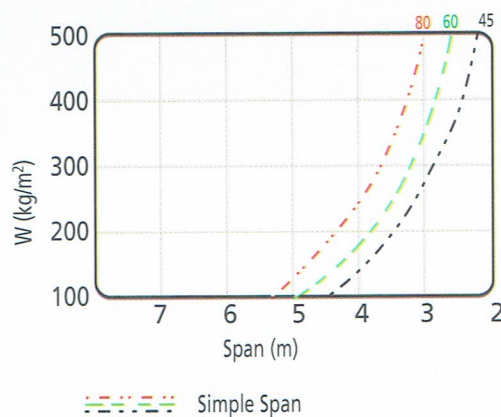

SNI B.j.LS (BMT)	THICKNESS ±mm (TCT)	Unit Weight		MOMEN OF INERTIA I_x (cm ⁴ /m)	SECTION MODULUS Z_x (cm ³ /m)
		Kg/m ¹	Kg/m ²		
45	0.50	3.39	6.16	159.0	22.6 s
60	0.65	4.49	8.16	213.0	30.3
80	0.85	5.92	10.76	285.0	40.5

TIGHT FRAME	SIDE TIGHT FRAME	END CLOSER	APRON	EAVES CLOSER
FA 1 / GP	FA 2 / GP	FA 3 / GP	FA 4 / GP	FA 5 / GP