





WR PP+G	+60°	5	1,2 Kg + 0,2 Kg Pump Packaging	FC PVDF+C	+80°	-10°	1,5 Kg + 0,2 Kg Pump Packaging	POMc	+80°	-10°	1,5 Kg + 0,2 Kg Pump Packaging	AISI 316 L	+80°	-10°	2,2 Kg + 0,2 Kg Pump Packaging
-------------------	-------------	----------	---	---------------------	-------------	-------------	---	-------------	-------------	-------------	---	-------------------	-------------	-------------	---

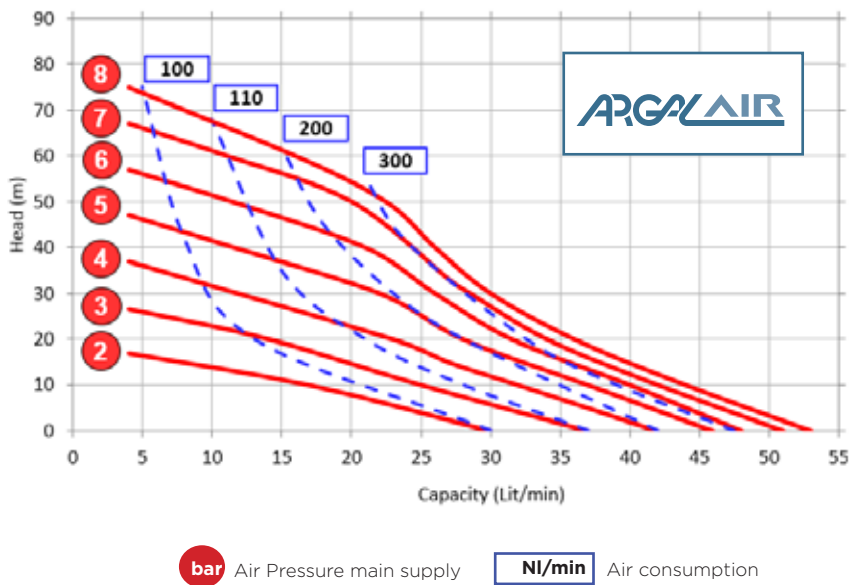

TECHNICAL DATA	
Fluid connections	½" BSP • NPT* • FLANGED* DN15
Air connection	6 mm
Max flow rate	52 l/m'
Max air pressure	8 bar
Max delivery head	80 mca
Max suction lift dry	4 mca
Max suction lift wet	9,8 mca
Max size solids	3 mm
Noise level	72 dB(A)
Displacement per cycle	70

DIMENSIONS (mm)	
PP+G	A 193 B 106 C 209
PVDF+C	A 193 B 106 C 209
ALU	A 194 B 107 C 205
AISI 316L	A 203 B 106 C 197

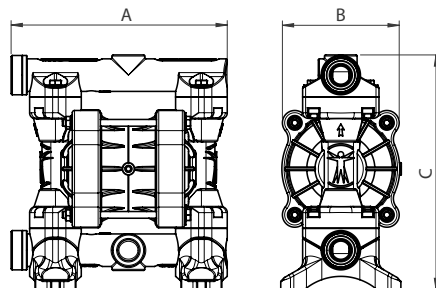

COMPOSITION	
Wetted parts	• PP+G • PVDF+C • ALU • AISI 316L
Diaphragms	• KEYFLEX + PTFE • SANTOPRENE + PTFE • KEYFLEX • SANTOPRENE
Valve Balls	• PTFE • AISI 316 • EPDM • NBR
Valve Seats	• PP • PVDF • AISI 316 • UPPE
Gaskets	• EPDM • FKM • NBR • PTFE

Connections scheme page 15

* Optional